W07-P1: convert global blogs css to a styled component

h
s
n
base

4105
1057

ffee
ome

Elements   Console   Sources   Network   »   ▤ 1   ⚙ ⋮ >

```
<!DOCTYPE html>
<html lang="en">
  ▶ <head>…</head>
  ▼ <body>
      <noscript>You need to enable JavaScript to run this app.</noscript>
    ▼ <div id="root">
      ▼ <div class="sc-gueYoa itfXEH">
        ▼ <section class="blogs"> == $0
          ▶ <div class="section-title">…</div>
          ▶ <div class="blogs-center">…</div> grid
          </section>
        </div>
      </div>
      <!--
          This HTML file is a template.
          If you open it directly in the browser, you will see an empty page.

          You can add webfonts, meta tags, or analytics to this file.
          The build step will place the bundled scripts into the <body> tag.

          To begin the development, run `npm start` or `yarn start`.
          To create a production bundle, use `npm run build` or `yarn build`.
        -->
    </body>
  </html>
```

html   body   div#root   div.sc-gueYoa.itfXEH   section.blogs

Styles   Computed   Layout   Event Listeners   DOM Breakpoints   Properties   Accessibility

Filter   :hov .cls + 🖌 ◀

```
element.style {
}
```

```
.itfXEH .blogs {                                           <style>
    --primary: ▉#645cff;
    --primary-dark: ▉#3c3799;
    --grey-light: ☐#f1f5f9;
    --grey: ▉#64748b;
    --grey-dark: ▉#0f172a;
    --letter-spacing: 2px;
    --fluid-width: 90vw;
    --max-width: 1170px;
    --border-radius: 0.15rem;
    padding: ▶ 5rem 0px;
}
```

Fetch
Blogs
From
Node
Server -
-207410571
207410571

localhost:3000/node_71

更

DevTools is now available in Chinese!

Always match Chrome's language | Switch DevTools to Chinese | Don't show again

Elements   Console   Sources   Network   »   📭 1   ⚙

```
<!DOCTYPE html>
<html lang="en">
  ▶ <head>…</head>
  ▼ <body>
      <noscript>You need to enable JavaScript to run this app.</noscript>
    ▼ <div id="root">
      ▼ <div class="sc-beqWaB iyhoTh">
        ▼ <section class="blogs"> == $0
          ▶ <div class="section-title">…</div>
            <div class="blogs-center"></div> grid
          </section>
        </div>
      </div>
      <!--
          This HTML file is a template.
          If you open it directly in the browser, you will see an empty pa
          
          You can add webfonts, meta tags, or analytics to this file.
          The build step will place the bundled scripts into the <body> ta
          
          To begin the development, run `npm start` or `yarn start`.
          To create a production bundle, use `npm run build` or `yarn buil
      -->
    </body>
</html>
```

html   body   div#root   div.sc-beqWaB.iyhoTh   section.blogs

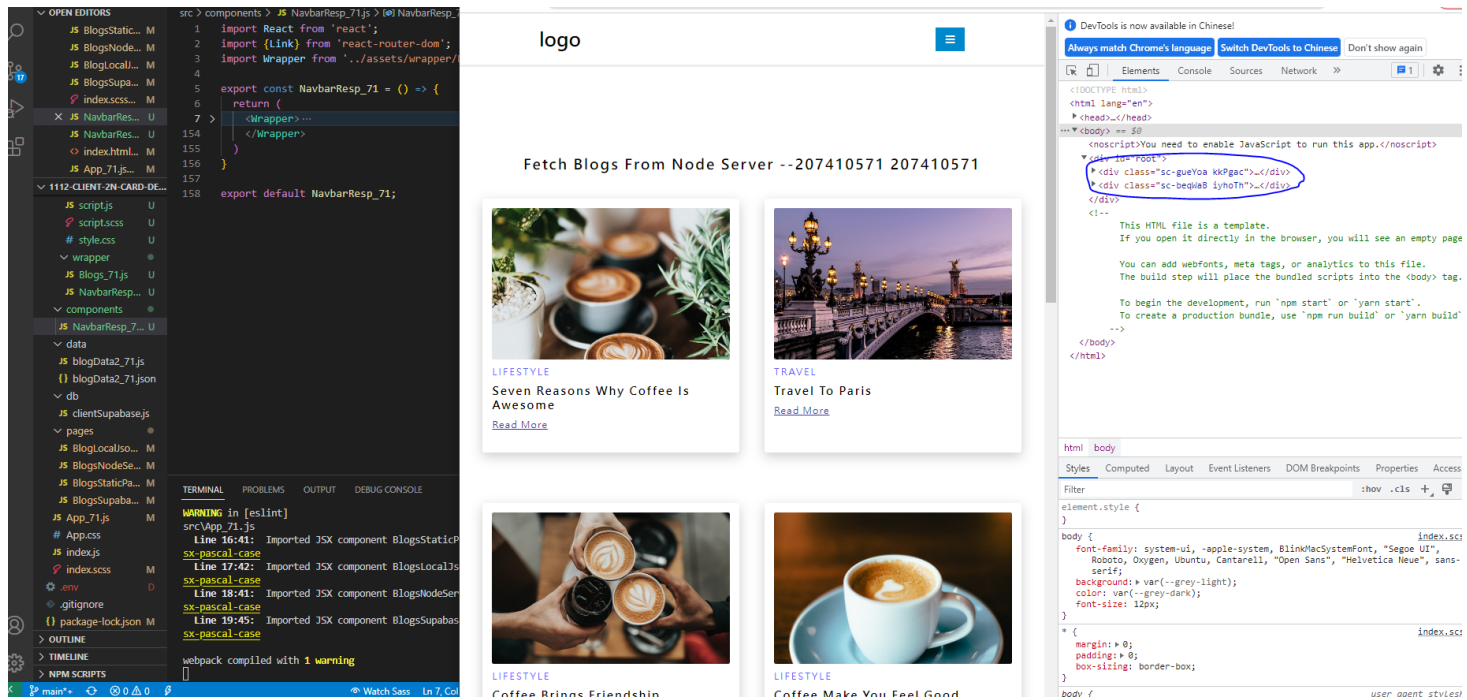Styles   Computed   Layout   Event Listeners   DOM Breakpoints   Properties   Acce
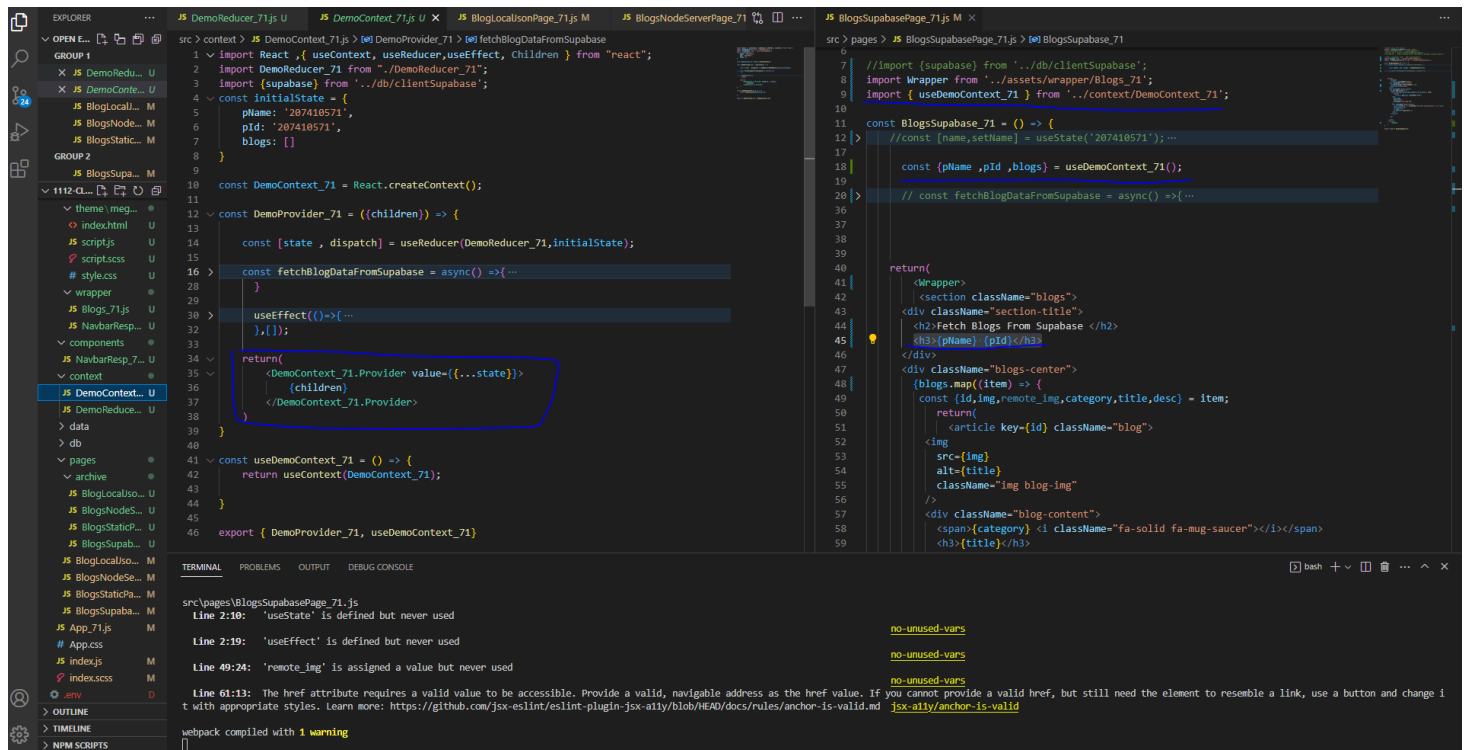
Filter   :hov .cls + 🖌

```
element.style {
}
```

```
.iyhoTh .blogs {                                          <s
  --primary: ■#645cff;
  --primary-dark: ■#3c3799;
  --grey-light: □#f1f5f9;
  --grey: ■#64748b;
  --grey-dark: ■#0f172a;
  --letter-spacing: 2px;
  --fluid-width: 90vw;
  --max-width: 1170px;
  --border-radius: 0.15rem;
  padding: ▶ 5rem 0px;
```

W07-P2: Convert mega menu (html, css) to React components using styled component

W07-P3: place BlogsSupabasePage_xx data into DemoContext_xx.js, and make it work

logo

Fetch Blogs From Supabase
207410571 207410571

LIFESTYLE
Seven Reasons Why Coffee Is Awesome
Read More

TRAVEL
Travel To Paris
Read More

LIFESTYLE
Coffee Brings Friendship
Read More

LIFESTYLE
Coffee Make You Feel Good
Read More

DevTools is now available in Chinese!
Always match Chrome's language   Switch DevTools to Chinese   Don't show again

Elements   Console   Sources   Components

Search (text or /regex/)

Link
Link
Link
Link
Link
Link
Link
Link
Link
Link
Link
Link
Link
Link
Link
Routes
  RenderedRoute
    Route.Provider
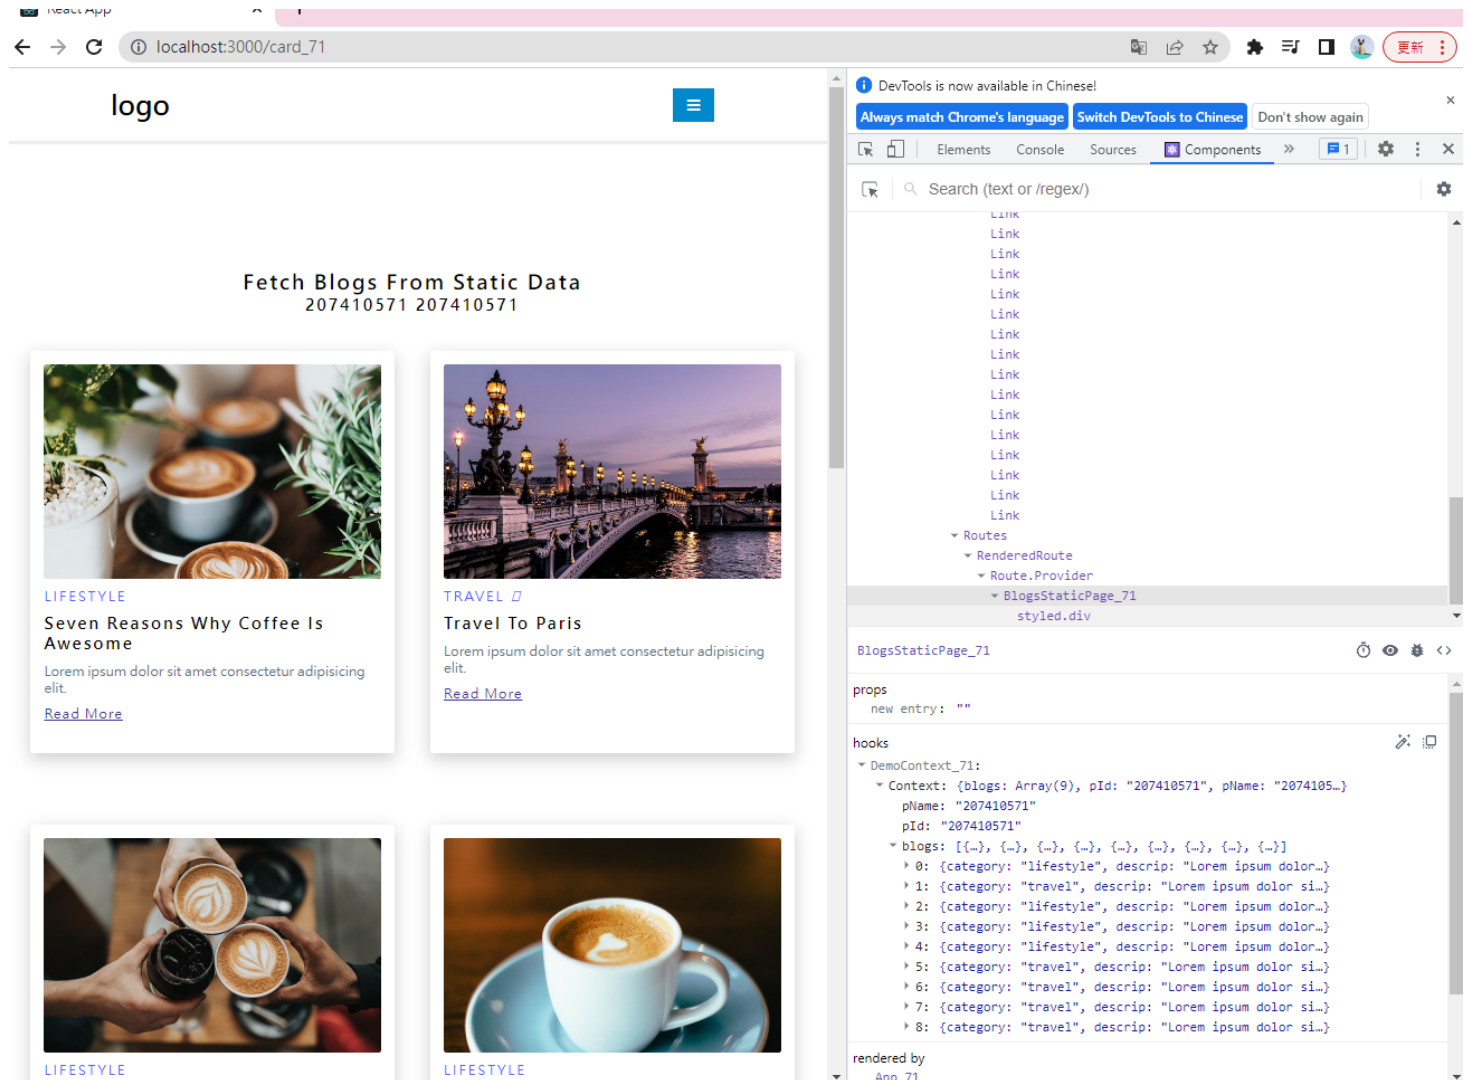   BlogsSupabase_71
        styled.div

BlogsSupabase_71

props
  new entry: ""

hooks
  DemoContext_71
    Context: {blogs: Array(9), pId: "207410571", pName: "2074105…}
      pName: "207410571"
      pId: "207410571"
    blogs: [{…}, {…}, {…}, {…}, {…}, {…}, {…}, {…}, {…}]
      0: {category: "lifestyle", descrip: "Lorem ipsum dolor…}
      1: {category: "travel", descrip: "Lorem ipsum dolor si…}
      2: {category: "lifestyle", descrip: "Lorem ipsum dolor…}
      3: {category: "lifestyle", descrip: "Lorem ipsum dolor…}
      4: {category: "lifestyle", descrip: "Lorem ipsum dolor…}
      5: {category: "travel", descrip: "Lorem ipsum dolor si…}
      6: {category: "travel", descrip: "Lorem ipsum dolor si…}
      7: {category: "travel", descrip: "Lorem ipsum dolor si…}
      8: {category: "travel", descrip: "Lorem ipsum dolor si…}

rendered by
  App_71

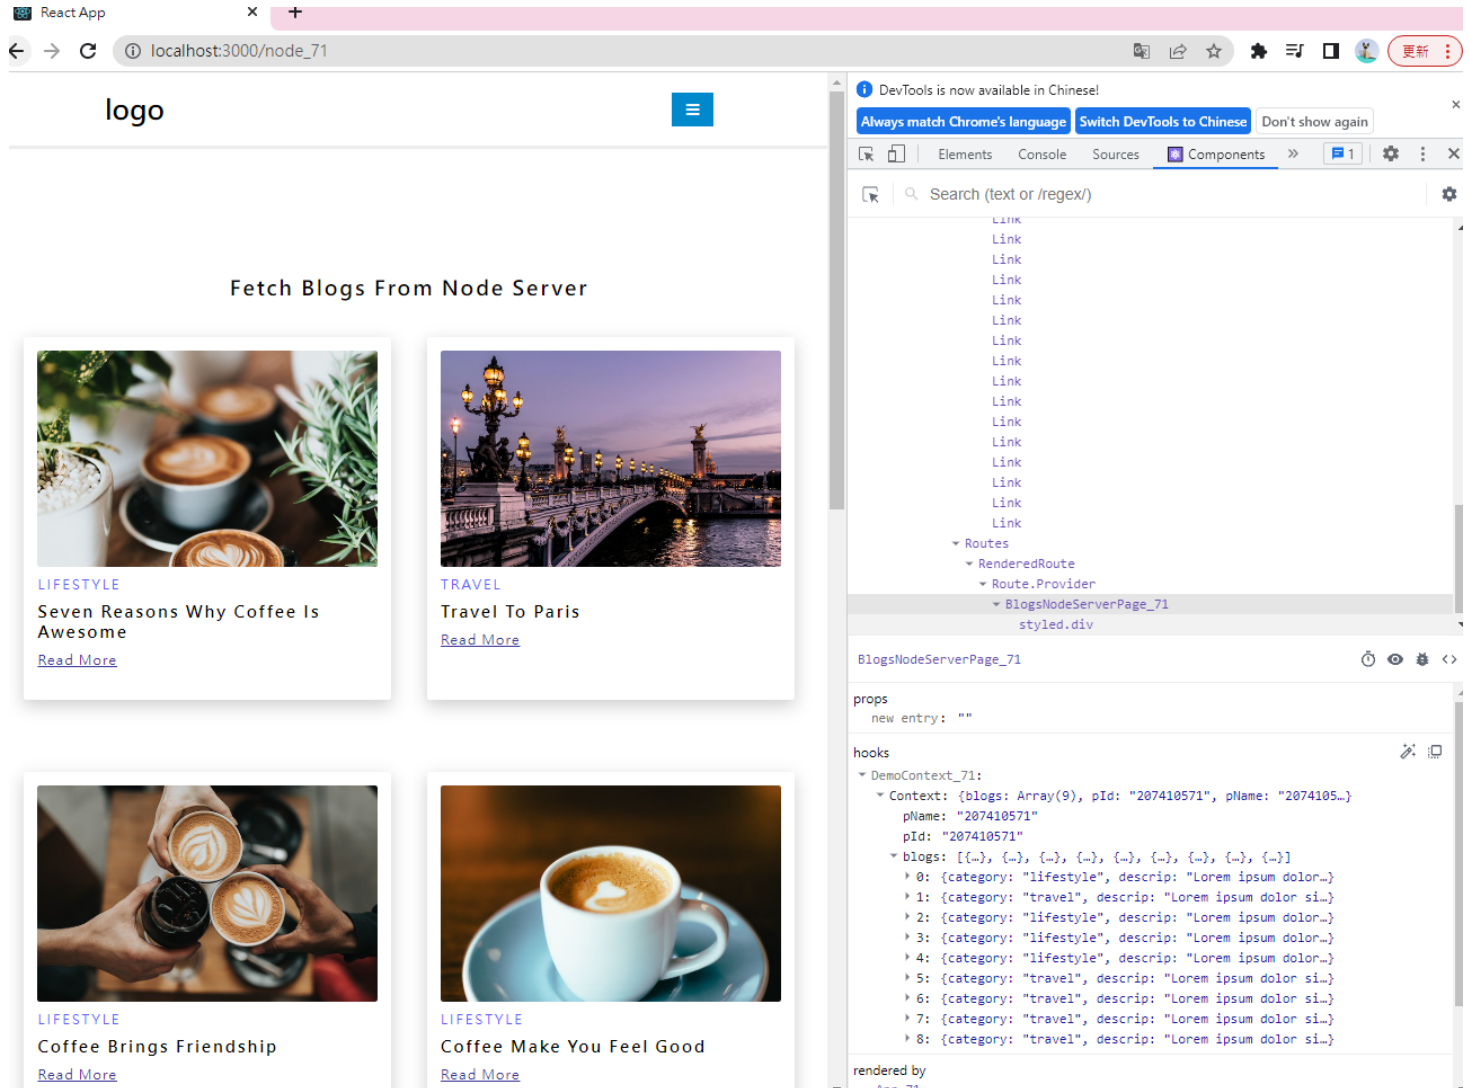# W07-P4: place BlogsStaticPage_xx data (name, id) into DemoContext_xx.js, and make it work

W07-P5: place BlogsLocalJsonPage_xx data into DemoContext_xx.js, and make it work

W07-P6: place BlogsNodeServerPage_xx data into DemoContext_xx.js (using blogs2), and make it work

W07-logs

```
$ git log --pretty=format:"%h%x09%an%x09%ad%x09%s" --after="2023-3-27"
8a5fb8e legandcorepower Wed Mar 29 23:26:00 2023 +0800  place All page data into DemoContext_71.js, and make
it work
e569a5f legandcorepower Wed Mar 29 21:37:52 2023 +0800  W07-P2: Convert mega menu (html, css) to React compon
ents using styled component
7935da5 legandcorepower Wed Mar 29 19:54:13 2023 +0800  W07-P1: convert global blogs css to a styled componen
t
```