
Group02

Beatify
Use-Case Specification: User Logout

Version 1.0

| | |
|-------------------------------------|------------------|
| Beatify | Version: 1.0 |
| Use-Case Specification: User Logout | Date: 13/11/2024 |
| | |

Revision History

| Date | Version | Description | Author |
|------------|---------|--|----------------|
| 13/11/2024 | 1.0 | Initial version. Created use-case specifications for User Logout including necessary fields, basic and alternative flows, and specific preconditions and postconditions. | Nguyễn Duy Bảo |
| | | | |
| | | | |
| | | | |

| | |
|-------------------------------------|------------------|
| Beatify | Version: 1.0 |
| Use-Case Specification: User Logout | Date: 13/11/2024 |
| | |


Table of Contents

| | |
|--------------------------------------|----------|
| 1. Use-Case Name: User Logout | 4 |
| 1.1 Brief Description | 4 |
| 2. Flow of Events | 4 |
| 2.1 Basic Flow | 4 |
| 3. Special Requirements | 4 |
| 4. Preconditions | 5 |
| 5. Postconditions | 5 |
| 6. Extension Points | 5 |

| | |
|-------------------------------------|------------------|
| Beatify | Version: 1.0 |
| Use-Case Specification: User Logout | Date: 13/11/2024 |

Use-Case Specification: User Logout

1. Use-Case Name: User Logout

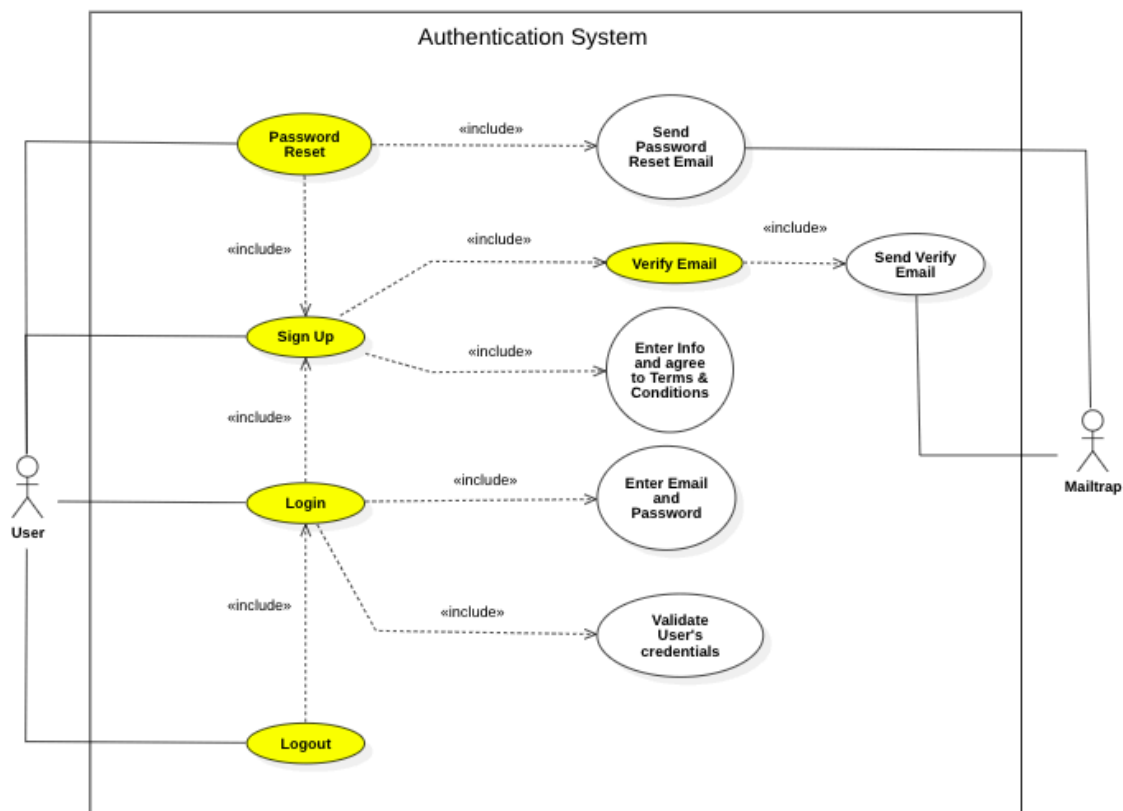

1.1 Brief Description

Allows a logged-in user to log out, clearing their session.

2. Flow of Events

2.1 Basic Flow

1. The user initiates a logout request.
2. The system clears the session token cookie.
3. The system sends a success response indicating that the user is logged out.

3. Special Requirements

- Clear session token cookie on logout.

| | |
|-------------------------------------|------------------|
| Beatify | Version: 1.0 |
| Use-Case Specification: User Logout | Date: 13/11/2024 |
| | |

4. Preconditions

- User is logged in.

5. Postconditions

- User is logged out, and the session token is removed.

6. Extension Points

- None.