

Multidimensional Arrays in C / C++

Difficulty Level : Easy • Last Updated : 20 Oct, 2021

Array- Basics

In C/C++, we can define multidimensional arrays in simple words as an array of arrays. Data in multidimensional arrays are stored in tabular form (in row-major order).

The general form of declaring N-dimensional arrays:

```
data_type array_name[size1][size2]....[sizeN];
```

data_type: Type of data to be stored in the array.

Here data_type is valid C/C++ data type

array_name: Name of the array

size1, size2,... ,sizeN: Sizes of the dimensions

Examples:

If (Coding)

```
{  
  C foundation course = true;  
  Focus = 100;  
}  
cout << "Success";
```

Wait no more!

Start Learning



We use cookies to ensure you have the best browsing experience on our website. By using our site, you acknowledge that you have read and understood our [Cookie Policy](#) & [Privacy Policy](#).

Got It !

Start Your Coding Journey Now!

[Login](#)[Register](#)

Size of multidimensional arrays

The total number of elements that can be stored in a multidimensional array can be calculated by multiplying the size of all the dimensions.

For example:

The array `int x[10][20]` can store total $(10 \times 20) = 200$ elements.

Similarly array `int x[5][10][20]` can store total $(5 \times 10 \times 20) = 1000$ elements.

Two-Dimensional Array

Two – dimensional array is the simplest form of a multidimensional array. We can see a two – dimensional array as an array of one – dimensional array for easier understanding.

- The basic form of declaring a two-dimensional array of size x, y:

Syntax:

```
data_type array_name[x][y];
```

data_type: Type of data to be stored. Valid C/C++ data type.

- We can declare a two-dimensional integer array say 'x' of size 10,20 as:

```
int x[10][20];
```

- Elements in two-dimensional arrays are commonly referred to by `x[i][j]` where `i` is the row number and `'j'` is the column number.
- A two – dimensional array can be seen as a table with 'x' rows and 'y' columns

We use cookies to ensure you have the best browsing experience on our website. By using our site, you acknowledge that you have read and understood our [Cookie Policy](#) & [Privacy Policy](#).

Got It !

Start Your Coding Journey Now!

Login

Register

Row 1	x[1][0]	x[1][1]	x[1][2]
Row 2	x[2][0]	x[2][1]	x[2][2]

•

Initializing Two – Dimensional Arrays: There are two ways in which a Two-Dimensional array can be initialized.

First Method:

```
int x[3][4] = {0, 1 ,2 ,3 ,4 , 5 , 6 , 7 , 8 , 9 , 10 , 11}
```

The above array has 3 rows and 4 columns. The elements in the braces from left to right are stored in the table also from left to right. The elements will be filled in the array in order, the first 4 elements from the left in the first row, the next 4 elements in the second row, and so on.

Better Method:

```
int x[3][4] = {{0,1,2,3}, {4,5,6,7}, {8,9,10,11}};
```

This type of initialization makes use of nested braces. Each set of inner braces represents one row. In the above example, there is a total of three rows so there are three sets of inner braces.

Accessing Elements of Two-Dimensional Arrays: Elements in Two-Dimensional arrays are accessed using the row indexes and column indexes.

We use cookies to ensure you have the best browsing experience on our website. By using our site, you acknowledge that you have read and understood our [Cookie Policy](#) & [Privacy Policy](#).

Got It !

Start Your Coding Journey Now!

[Login](#)[Register](#)

Note: In arrays, if the size of an array is N. Its index will be from 0 to N-1. Therefore, for row index 2 row number is $2+1 = 3$.

To output all the elements of a Two-Dimensional array we can use nested for loops. We will require two for loops. One to traverse the rows and another to traverse columns.

C++

```
// C++ Program to print the elements of a
// Two-Dimensional array
#include<iostream>
using namespace std;

int main()
{
    // an array with 3 rows and 2 columns.
    int x[3][2] = {{0,1}, {2,3}, {4,5}};

    // output each array element's value
    for (int i = 0; i < 3; i++)
    {
        for (int j = 0; j < 2; j++)
        {
            cout << "Element at x[" << i
                << "][" << j << "]: ";
            cout << x[i][j]<<endl;
        }
    }

    return 0;
}
```

Output:


We use cookies to ensure you have the best browsing experience on our website. By using our site, you acknowledge that you have read and understood our [Cookie Policy](#) & [Privacy Policy](#).

Got It !

Start Your Coding Journey Now!

[Login](#)
[Register](#)

Three-Dimensional Array

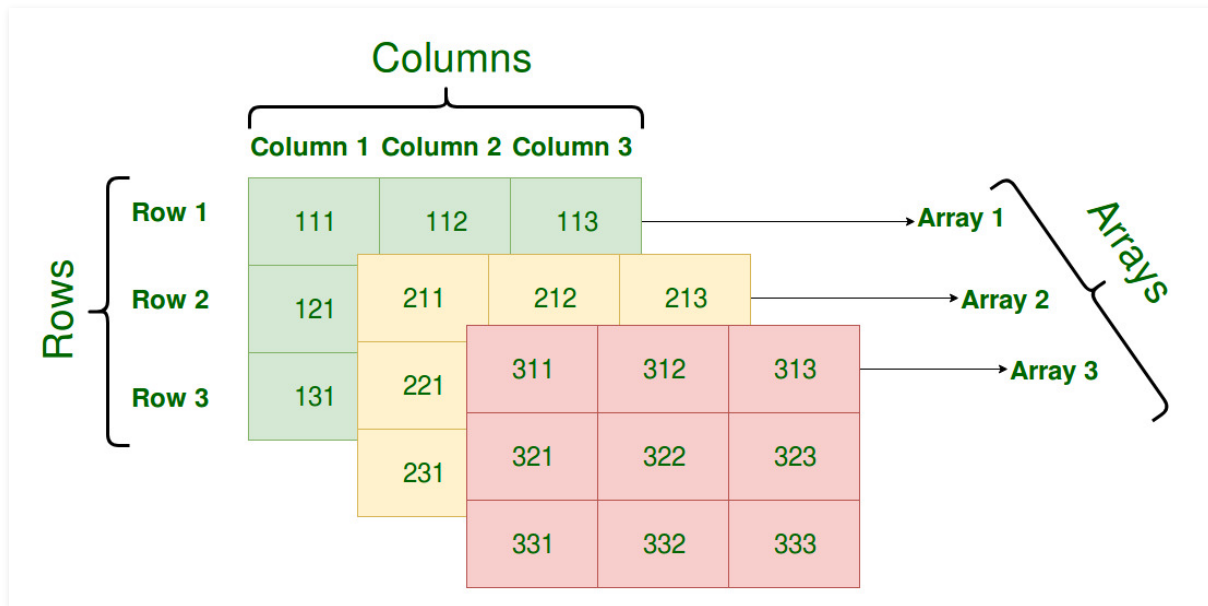

Initializing Three-Dimensional Array: Initialization in a Three-Dimensional array is the same as that of Two-dimensional arrays. The difference is as the number of dimensions increases so the number of nested braces will also increase.

Method 1:

```
int x[2][3][4] = {0, 1, 2, 3, 4, 5, 6, 7, 8, 9, 10,
                  11, 12, 13, 14, 15, 16, 17, 18, 19,
                  20, 21, 22, 23};
```

Better Method:

```
int x[2][3][4] =
```

We use cookies to ensure you have the best browsing experience on our website. By using our site, you acknowledge that you have read and understood our [Cookie Policy](#) & [Privacy Policy](#).

Got It !

Start Your Coding Journey Now!

[Login](#)
[Register](#)

Three-dimensional Arrays is also similar to that of two-dimensional Arrays. The difference is we have to use three loops instead of two loops for one additional dimension in Three-dimensional Arrays.

C++

```
// C++ program to print elements of Three-Dimensional
// Array
#include<iostream>
using namespace std;

int main()
{
    // initializing the 3-dimensional array
    int x[2][3][2] =
    {
        { {0,1}, {2,3}, {4,5} },
        { {6,7}, {8,9}, {10,11} }
    };

    // output each element's value
    for (int i = 0; i < 2; ++i)
    {
        for (int j = 0; j < 3; ++j)
```



[Data Structures](#)
[Algorithms](#)
[Interview Preparation](#)
[Topic-wise Practice](#)
[C++](#)
[Java](#)
[Python](#)

```
        cout<<endl;
    }
}
return 0;
}
```

Output:

We use cookies to ensure you have the best browsing experience on our website. By using our site, you acknowledge that you have read and understood our [Cookie Policy](#) & [Privacy Policy](#).

Got It !

Start Your Coding Journey Now!

[Login](#)[Register](#)

```
Element at x[0][2][0] = 4
Element at x[0][2][1] = 5
Element at x[1][0][0] = 6
Element at x[1][0][1] = 7
Element at x[1][1][0] = 8
Element at x[1][1][1] = 9
Element at x[1][2][0] = 10
Element at x[1][2][1] = 11
```

In similar ways, we can create arrays with any number of dimensions. However, the complexity also increases as the number of dimensions increases.
The most used multidimensional array is the Two-Dimensional Array.

C++ Programming Language Tutorial | Multidimensional Arrays in C++ |...



?list=PLqM7aLHXFySGg6GSRmE2INl4k8fPH5qVB

This article is contributed by [Harsh Agarwal](#). If you like GeeksforGeeks and would like to contribute, you can also write an article using write.geeksforgeeks.org or mail your article to review-team@geeksforgeeks.org. See your article appearing on the GeeksforGeeks main page and help other Geeks.

Please write comments if you find anything incorrect, or you want to share more information about the topic discussed above.

We use cookies to ensure you have the best browsing experience on our website. By using our site, you acknowledge that you have read and understood our [Cookie Policy](#) & [Privacy Policy](#).

Got It !

Start Your Coding Journey Now!

[Login](#)[Register](#)

Like 283

[Previous](#)[Next](#)

RECOMMENDED ARTICLES

Page : [1](#) [2](#) [3](#)

01 Initialization of a multidimensional arrays in C/C++
22, Oct 10

05 Initialization of variables sized arrays in C
30, Apr 12

02 Multidimensional Pointer Arithmetic in C/C++
09, Jul 11

06 How to concatenate two integer arrays without using loop in C ?
07, Jan 16

03 How to print dimensions of

We use cookies to ensure you have the best browsing experience on our website. By using our site, you acknowledge that you have read and understood our [Cookie Policy](#) & [Privacy Policy](#).

Got It !

Start Your Coding Journey Now!

[Login](#)[Register](#)

Article Contributed By :

**GeeksforGeeks**

Vote for difficulty

Current difficulty : [Easy](#).[Easy](#)[Normal](#)[Medium](#)[Hard](#)[Expert](#)**Improved By :** [Ansh Khurana](#), [RishabhPrabhu](#), [pujasingg43](#)**Article Tags :** [CBSE - Class 11](#), [school-programming](#), [C Language](#), [C++](#)**Practice Tags :** [CPP](#)[Improve Article](#)[Report Issue](#)

Writing code in comment? Please use ide.geeksforgeeks.org, generate link and share the link here.

[Load Comments](#)

We use cookies to ensure you have the best browsing experience on our website. By using our site, you acknowledge that you have read and understood our [Cookie Policy](#) & [Privacy Policy](#).

Got It !

Start Your Coding Journey Now!

[Login](#)[Register](#)

Company

[About Us](#)
[Careers](#)
[In Media](#)
[Contact Us](#)
[Privacy Policy](#)
[Copyright Policy](#)

News

[Top News](#)
[Technology](#)
[Work & Career](#)
[Business](#)
[Finance](#)
[Lifestyle](#)

Web Development

[Web Tutorials](#)
[Django Tutorial](#)
[HTML](#)
[CSS](#)
[JavaScript](#)
[Bootstrap](#)

Learn

[Algorithms](#)
[Data Structures](#)
[SDE Cheat Sheet](#)
[Machine learning](#)
[CS Subjects](#)
[Video Tutorials](#)

Languages

[Python](#)
[Java](#)
[CPP](#)
[Golang](#)
[C#](#)
[SQL](#)

Contribute

[Write an Article](#)
[Improve an Article](#)
[Pick Topics to Write](#)
[Write Interview Experience](#)
[Internships](#)
[Video Internship](#)

@geeksforgeeks , Some rights reserved

We use cookies to ensure you have the best browsing experience on our website. By using our site, you acknowledge that you have read and understood our [Cookie Policy](#) & [Privacy Policy](#).

Got It !