

---

# **pyLCSIM Documentation**

***Release 0.2.2***

**Riccardo Campana**

November 27, 2014



## CONTENTS

<b>1</b>	<b>Documentation for pyLCSIM</b>	<b>3</b>
1.1	Introduction . . . . .	3
1.2	Prerequisites . . . . .	3
1.3	Installation . . . . .	3
1.4	Mailing list . . . . .	3
1.5	Example 1 . . . . .	4
1.6	Example 2 . . . . .	7
1.7	Example 3 . . . . .	8
1.8	Example 4 . . . . .	10
1.9	Main module . . . . .	10
1.10	Submodule: psd_models . . . . .	13
1.11	Changelog . . . . .	14
<b>2</b>	<b>Indices and tables</b>	<b>15</b>
	<b>Python Module Index</b>	<b>17</b>
	<b>Index</b>	<b>19</b>



Contents:



## DOCUMENTATION FOR PYLCSIM

### 1.1 Introduction

pyLCSIM is a python package to simulate X-ray lightcurves from coherent signals and power spectrum models.

Coherent signals can be specified as a sum of one or more sinusoids, each with its frequency, pulsed fraction and phase shift; or as a series of harmonics of a fundamental frequency (each with its pulsed fraction and phase shift).

Power spectra can be simulated from a model of the power spectrum density (PSD), using as a template one or more of the built-in library functions. The user can also define his/her custom models. Models are additive.

A PDF version of these notes is available [here](#).

**Warning:** the current release (0.x.y) is HIGHLY EXPERIMENTAL! Use at your own risk...

### 1.2 Prerequisites

pyLCSIM requires [Numpy](#) (at least v1.8) and [Astropy](#) (at least v0.3).

[Matplotlib](#) is highly recommended if you want to plot your simulations.

### 1.3 Installation

The package can be downloaded [here](#).

The installation follows the usual steps:

```
$ tar xzvf pyLCSIM-0.2.2.tar.gz
```

```
$ cd pyLCSIM-0.2.2
```

```
$ python setup.py install
```

The last step may require administrator privileges.

### 1.4 Mailing list

A dedicated mailing list is available, to host announcements of new releases, to report issues and to get support. If interested, subscribe [here](#).

## 1.5 Example 1

Let's begin with a PSD model simulation.

We import the usual packages:

```
import matplotlib.pyplot as plt
import numpy as np
import pyLCSIM
```

We assume that our source has a rate of 30000 counts/s. Moreover, we have a 5000 counts/s background rate, and we have made a 50 s exposure. Our observation has a time resolution of 10 ms. We want to simulate a QPO at a frequency of 10 Hz, superimposed to a continuum modelled as a smoothly-varying broken power law (spectral indices 1 and 2, with a steepness change at 1 Hz). The required fractional RMS variation of the signal is 1%:

```
rate_src    = 30000.0
rate_bkg    = 5000.0
t_exp       = 50.0
dt          = 0.01
frms        = 0.1
```

The total bins of the lightcurve are therefore:

```
nbins = long(t_exp/dt)
```

The simulation follows as:

```
# Instantiate a simulation object
sim = pyLCSIM.Simulation()

# Add two PSD models: a smooth broken power law and a Lorentzian representing a QPO.
# See the documentation for details.
sim.addModel('smoothbknp', [1., 1, 2, 1])
sim.addModel('lorentzian', [10., 1., 10, 2])

# Run the simulation
sim.run(dt, nbins, rate_src, rms=frms)

# Add Poisson noise to the light curve
sim.poissonRandomize(dt, rate_bkg)

# Get lightcurve and power spectrum as 1-D arrays
time, rate = sim.getLightCurve()
f, psd = sim.getPowerSpectrum()
```

Done! We can save the results as FITS files:

```
# Save FITS files with lightcurve and spectrum
pyLCSIM.saveFITSLC("myLC.fits", time, rate)
pyLCSIM.saveFITSPSD("myPSD.fits", f, psd)
```


and view the results:


```
# Plot the lightcurve and power spectrum
fig0 = plt.figure()
plt.plot(time, rate)
plt.xlabel("Time [s]")
plt.ylabel("Rate [counts/s]")
plt.title("Lightcurve")
```



```
fig1 = plt.figure()
plt.loglog(f, psd, drawstyle='steps-mid', color='black')
plt.xlabel("Frequency [Hz]")
plt.ylabel("PSD [Leahy normalized]")
plt.title("Power spectrum density")


plt.show()
```

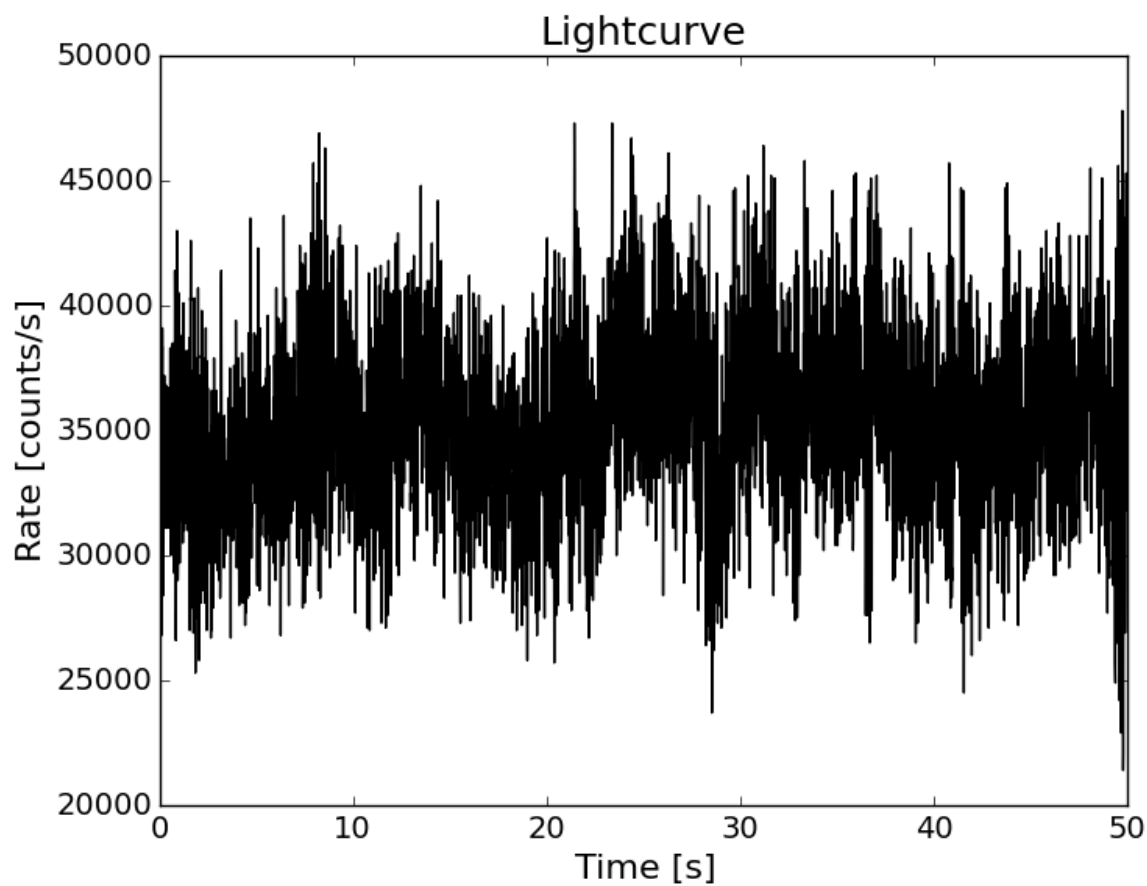

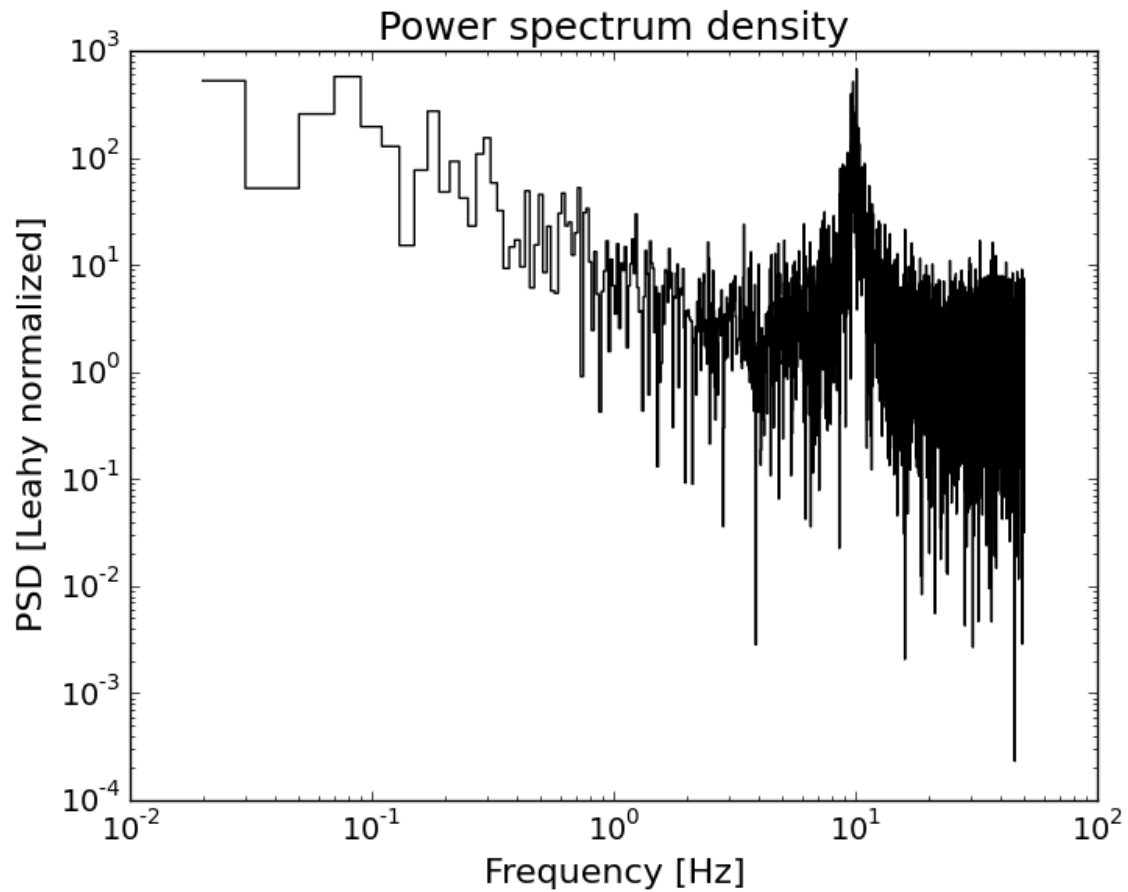

The PSD model used in the simulation can be obtained (and plotted) following the next example code:

```
freq_m, model_tot, model_comp = sim.getPSDModel(dt, nbins)
plt.figure()
for mod in model_comp:
    # Plot the various additive component as dashed lines
    plt.loglog(freq_m, mod, ls='dashed', color='red')
# Plot the total model
plt.loglog(freq_m, model_tot)
plt.show()
```

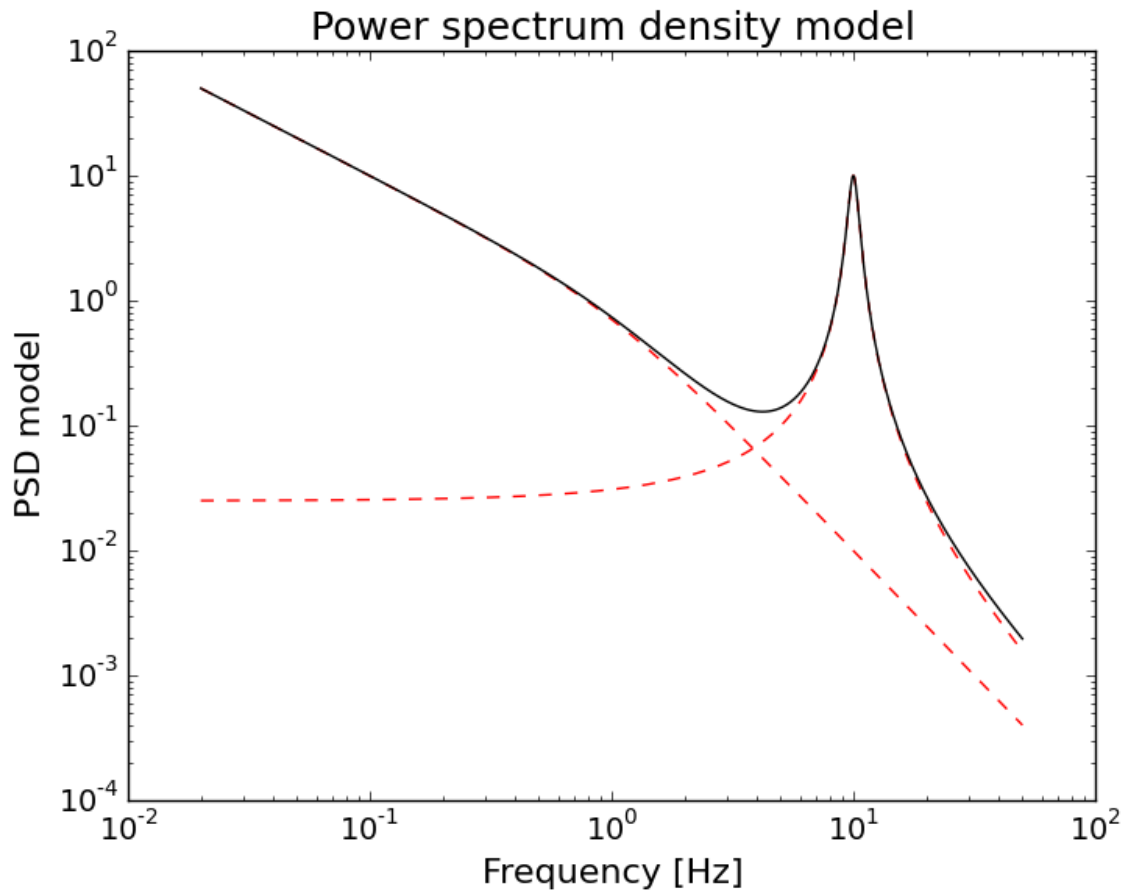

## 1.6 Example 2


The user can also define his/her own PSD models, simply as python functions. The only caveat is that the function should be positive-valued, and it is suggested to avoid too small output values.

The following example shows a simulation using an user-defined function (a Gaussian centered at 10 Hz, in this case):

```
def myFunc(f, p):
    """
    Example of user-defined function: a Gaussian.
    User-defined PSD models should be positive-valued!
    Moreover, in this example the output is clipped at 1e-32 to avoid too small values.
    """
    f = p[0]*np.exp(-(f-p[1])**2/p[2]**2)
    return np.clip(f, 1e-32, np.max(f))

sim = pyLCSIM.Simulation()
sim.addModel('smoothbknp', [1., 1, 2, 1])
sim.addModel(myFunc, [1000., 10, 1.])

# Run the simulation
sim.run(dt, nbins, rate_src, rms=frms)
```

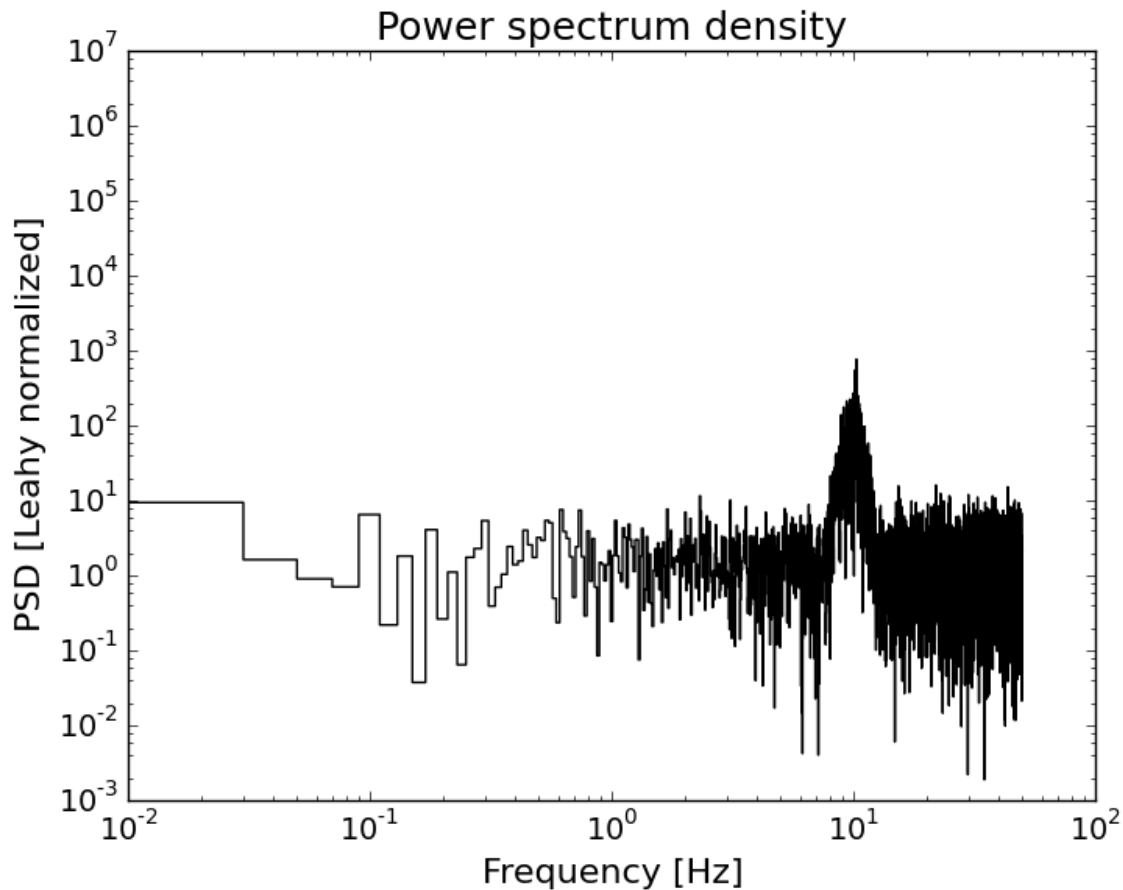

## 1.7 Example 3

The following example shows the simulation of a coherent signal using a sum of sinusoids:

```
import matplotlib.pyplot as plt
import numpy as np
import pyLCSIM
```

```
rate_src    = 30000.0
rate_bkg    = 5000.0
t_exp       = 1.0
dt          = 0.0001
nbins = long(t_exp/dt)
```

Note the different exposure time (1 s) and time resolution (100 us):

```
# Instantiate a simulation object, this time as coherent
sim = pyLCSIM.Simulation(kind='coherent')
```

```
# Run the simulation, using:
```

```
# four sinusoidal frequencies: 340, 550, 883, 1032 Hz;
```

```
# with pulsed fractions 10%, 5%, 7% and 15% respectively;
```

```
# the third frequency has a 35 degree phase shift with respect to the others
```

```
sim.run(dt, nbins, rate_src, freq=[340, 550, 883, 1032], amp=[0.1, 0.05, 0.07, 0.15], phi=[0., 0, 35
```

```

# Add Poisson noise to the light curve
sim.poissonRandomize(dt, rate_bkg)

# Get lightcurve and power spectrum as 1-D arrays
time, rate = sim.getLightCurve()
f, psd = sim.getPowerSpectrum()


# Plot the lightcurve and power spectrum
fig0 = plt.figure()
plt.plot(time, rate)
plt.xlabel("Time [s]")
plt.ylabel("Rate [counts/s]")
plt.title("Lightcurve")

fig1 = plt.figure()
plt.loglog(f, psd, drawstyle='steps-mid', color='black')
plt.xlabel("Frequency [Hz]")
plt.ylabel("PSD [Leahy normalized]")
plt.title("Power spectrum density")

# Save FITS files with lightcurve and spectrum
pyLCSIM.saveFITS("myLC.fits", time, rate)
pyLCSIM.saveFITS("myPSD.fits", f, psd)

plt.show()

```

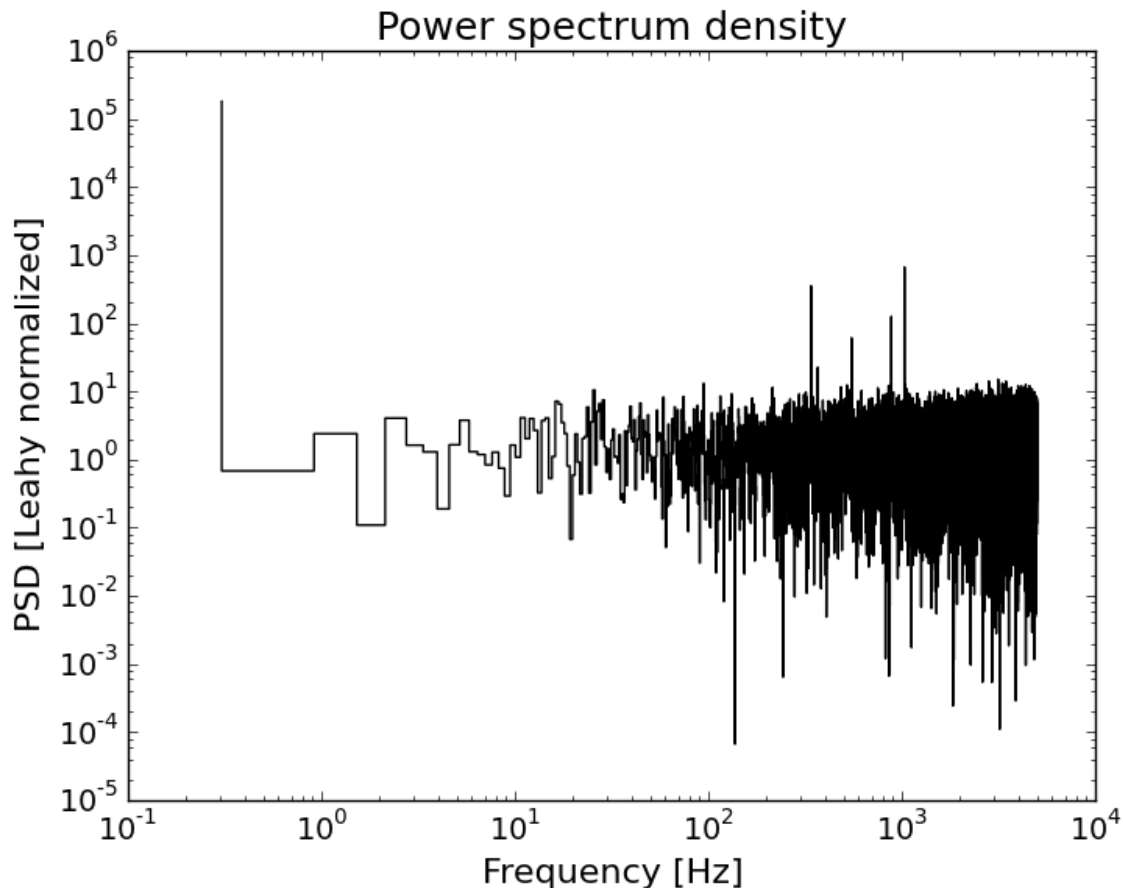

## 1.8 Example 4

Finally, an example with a fundamental frequency and two harmonics:

```
import matplotlib.pyplot as plt
import numpy as np
import pyLCSIM

rate_src      = 300000.0
rate_bkg      = 3000.0
t_exp         = 1.0
dt            = 0.0001
phase_shift   = 0.
nbins         = long(t_exp/dt)

print nbins

# Instantiate a simulation object, this time as coherent
sim = pyLCSIM.Simulation(kind='coherent')

# Run the simulation:
# Fundamental at 500 Hz, 3 harmonics (500, 1000, 1500 Hz)
# with pulsed fractions 10%, 5% and 15% respectively
sim.run(dt, nbins, rate_src, freq=500, nha=3, amp=[0.1, 0.05, 0.15])

# Add Poisson noise to the light curve
sim.poissonRandomize(dt, rate_bkg)

# Get lightcurve and power spectrum as 1-D arrays
time, rate = sim.getLightCurve()
f, psd = sim.getPowerSpectrum()

# Plot the lightcurve and power spectrum
fig0 = plt.figure()
plt.plot(time, rate)

fig1 = plt.figure()
plt.loglog(f, psd, drawstyle='steps-mid', color='black')

# Save FITS files with lightcurve and spectrum
pyLCSIM.saveFITSLC("myLC.fits", time, rate)
pyLCSIM.saveFITSPSD("myPSD.fits", f, psd)

plt.show()
```

## 1.9 Main module

A python package to simulate X-ray lightcurves from coherent signals and power spectrum models.

```
class pyLCSIM.Simulation (kind='psd')
    Main simulation class.
```

**History:** v1.3: Added getPSDModel method. Riccardo Campana, 2014.

v1.2: Added reset method. Riccardo Campana, 2014.

v1.1: Bugfix. Riccardo Campana, 2014.

v1: Initial python implementation. Riccardo Campana, 2014.

**addModel** (*modelName, modelParams*)

Append simulation model to model dictionary

**getLightCurve** ()

Get lightcurve as time and rate arrays

**getPSDModel** (*dt, nbins, freq=1000*)

Get PSD model Returns a tuple with: frequency array, total model, array with single components

**getPowerSpectrum** ()

Get power spectrum as frequency and power arrays

**info** ()

Prints simulation informations

**poissonRandomize** (*dt, bkg*)

Add Poissonian noise to lightcurve (and background, if present)

**reset** ()

Reset the simulation, emptying models array and other members

**run** (*dt, nbins\_old, mean, rms=None, freq=None, nha=None, amp=None, phi=None, verbose=False*)

Run the simulation

**pyLCSIM.lcsinusoid** (*dt=1.0, nbins=65536, mean=0.0, freq=None, nha=1, amp=None, phi=None*)

Generate coherent signals as a sequence of sinusoids (if len(freq) > 1) or of the fundamental frequency plus nha-1 harmonics (if len(freq) == 1), each with normalized pulsed fraction amp[i].

**Kwargs:** dt: time resolution of the lightcurve to be simulated (default: 1.0).

nbins: Number of bins of the simulated lightcurve (default: 65536).

freq: if float: frequency of the fundamental harmonic, if array: frequencies of sinusoids.

nha: number of harmonics (>1)

amp: array with nha/nfreq elements; pulsed fraction for each frequency

phi: array with nha/nfreq elements; phases (in degrees!) for each frequency

**Returns:** time: time array

rate: array of count rates

**History:** v1: Initial python implementation, from the IDL procedure lcharmonics.pro v0.0.3 by I. Donnarumma & R. Campana. Riccardo Campana, 2014.

**pyLCSIM.lcpsd** (*dt=1.0, nbins=65536, mean=0.0, rms=1.0, seed=None, models=None, phase\_shift=None, time\_shift=None, verbose=False*)

Simulate a light-curve with a general power spectrum shape. For the underlying algorithm see: J. Timmer & M. Koenig, "On generating power law noise", A&A, 300, 707-710 (1995).

**Kwargs:** dt: time resolution of the lightcurve to be simulated

**nbins: Number of bins of the simulated lightcurve (default:65536).** Should be power of two for optimum performance (FFT...)

mean: Mean count rate of the simulated lightcurve (default: 0.).

rms: Total fractional RMS of the simulated lightcurve.

seed: Seed for the random number generator.

**models:** List of tuples, each containing:

1. Name of a function returning the desired PSD shape,

b. Parameters of the model (argument to model). Total model is the sum of these tuples.

phase\_shift: Constant phase shift (in degrees) to the FFT.

time\_shift: Constant time shift to be inserted in the lightcurve, as a frequency-dependent phase shift.

verbose: If True, prints some debugging information.

**Returns:** time: time array.

rate: array of count rates.

**History:** v2: Added the possibility to employ user-defined PSD models. Riccardo Campana, 2014.

v1: Initial python implementation, based on AITLIB IDL procedure timmerlc.pro. Riccardo Campana, 2014.

`pyLCSIM.poisson_randomization (rate, dt=1.0, bkg=0.0, seed=None)`

Poisson randomization of the rate array.

**Args:** rate: input array of count rates (in cts/s).

**Kwargs:** dt: time resolution of the lightcurve to be simulated.

bkg: Mean count rate of the simulated lightcurve (default: 0.0).

seed: Seed for the random number generator.

**Returns:** newrate: Array of Poisson randomized count rates of length n.

**History:** v1: Initial python implementation. Riccardo Campana, 2014.

`pyLCSIM.psd (time, rate, norm='leahy')`

Returns power spectral density from a (real) time series with Leahy normalization.

**Args:** time: array of times (evenly binned).

rate: array of rate in counts/s.

**Kwargs:** norm: Normalization (only Leahy for now).

**Returns:** f: array of frequencies.

p: power spectrum.

**History:** v1: Initial python implementation. Riccardo Campana, 2014.

`pyLCSIM.rebin (x, y, factor, mode='rate', verbose=False)`

Linearly rebins the (x, y) 1-D arrays by factor, i.e. with  $\text{len}(x)/\text{factor}$  new bins, taking for each new element the mean of the corresponding x elements, and the sum (if `mode=='counts'`) or the mean (if `mode=='rate'`) of the corresponding y elements. If the new number of bins is not a factor of the old one, the array is cropped.

**Args:** x: x array (same length as y)

y: y array (same length as x)

factor: rebinning factor

**Kwargs:** mode: 'counts' or 'rate'; returns sum or mean of y-array elements

**Returns:** xreb: rebinned x array

yreb: rebinned y array



**History:** v2: Switched to rebinning factor instead of number of new bins. Riccardo Campana, 2014. v1: Initial python implementation. Riccardo Campana, 2014.

`pyLCSIM.logrebin(x, y, factor, mode='rate', verbose=False)`

Logarithmically rebins the (x, y) 1-D arrays by a constant logarithmic bin  $\log(1+1/\text{factor})$ , i.e. each new bin has a width  $(1+1/\text{factor})$  greater than the preceding; taking for each new element the logarithmic mean of the corresponding x elements, and the sum (if `mode=='counts'`) or the mean (if `mode=='rate'`) of the corresponding y elements.

**Args:** x: x array (same length as y)

y: y array (same length as x)

factor: logarithmic rebinning factor

**Kwargs:** mode: 'counts' or 'rate'; returns sum or mean of y-array elements

**Returns:** xreb: rebinned x array

yreb: rebinned y array

**History:** v2: Switched to logarithmic rebinning factor. Riccardo Campana, 2014. v1: Initial python implementation. Riccardo Campana, 2014.

`pyLCSIM.saveFITSLC(outfilename, time, rate, clobber=True)`

Produce an output FITS file containing a lightcurve.

**Args:** outfilename: Name of the output FITS file

time: Array of times

rate: Array of count rates

**Kwargs:** clobber: if True, overwrites existing files with same name

**Returns:** none

**History:** v2: OGIP-compliance (OGIP 93-003). Riccardo Campana, 2014.

v1: Initial python implementation. Riccardo Campana, 2014.

`pyLCSIM.saveFITSPSD(outfilename, freq, psd, clobber=True)`

Produce an output FITS file containing a power spectrum.

**Args:** outfilename: Name of the output FITS file

freq: Array of frequencies

psd: Array of power spectrum

**Kwargs:** clobber: if True, overwrites existing files with same name

**Returns:** none

**History:** v1: Initial python implementation. Riccardo Campana, 2014.

## 1.10 Submodule: psd\_models

Contains the analytic models for the power spectrum density.

`pyLCSIM.psd_models.lorentzian(x, p)`

Generalized Lorentzian function.

(WARNING: for  $n \neq 2$  the function is no more normalized!)

**Args:** x: (non-zero) frequencies.

p[0]: x0 = peak central frequency.

p[1]: gamma = FWHM of the peak.

p[2]: value of the peak at x = x0.

p[3]: n = power coefficient.

The quality factor is given by  $Q = x0/\text{gamma}$ .

**Returns:** f: psd model.

**History:** v1: Initial python implementation. Riccardo Campana, 2014.

`pyLCSIM.psd_models.smoothbknp`(x, p)

Smooth broken power law.

**Args:** x: (non-zero) frequencies.

p[0]: Normalization.

p[1]: power law index for  $f \rightarrow 0$ .

p[2]: power law index for  $f \rightarrow \infty$ .

p[3]: break frequency.

**Returns:** f: psd model.

**History:** v1: initial python implementation. Riccardo Campana, 2014.

## 1.11 Changelog

v0.2.2: Modified rebinning functions (`rebin()` and `logrebin()`).

v0.2.1: Added `getPSDModel()` method to `Simulation`. Bugfixes.

v0.2.0: Added the possibility to employ user-defined PSD models.

v0.1.2: Added `reset` method to `Simulation`. Lightcurve FITS output is now OGIP-compliant.

v0.1.1: Bugfix. Modified `Simulation` class.

v0.1.0: Initial release.

## INDICES AND TABLES

- *genindex*
- *modindex*
- *search*



**p**

`pyLCSIM`, [10](#)

`pyLCSIM.psd_models`, [13](#)



## A

`addModel()` (pyLCSIM.Simulation method), 11

## G

`getLightCurve()` (pyLCSIM.Simulation method), 11

`getPowerSpectrum()` (pyLCSIM.Simulation method), 11

`getPSDModel()` (pyLCSIM.Simulation method), 11

## I

`info()` (pyLCSIM.Simulation method), 11

## L

`lcpsd()` (in module pyLCSIM), 11

`lcsinусoid()` (in module pyLCSIM), 11

`logrebin()` (in module pyLCSIM), 13

`lorentzian()` (in module pyLCSIM.psd\_models), 13

## P

`poisson_randomization()` (in module pyLCSIM), 12

`poissonRandomize()` (pyLCSIM.Simulation method), 11

`psd()` (in module pyLCSIM), 12

pyLCSIM (module), 10

pyLCSIM.psd\_models (module), 13

## R

`rebin()` (in module pyLCSIM), 12

`reset()` (pyLCSIM.Simulation method), 11

`run()` (pyLCSIM.Simulation method), 11

## S

`saveFITSLC()` (in module pyLCSIM), 13

`saveFITSPSD()` (in module pyLCSIM), 13

Simulation (class in pyLCSIM), 10

`smoothbknp0()` (in module pyLCSIM.psd\_models), 14