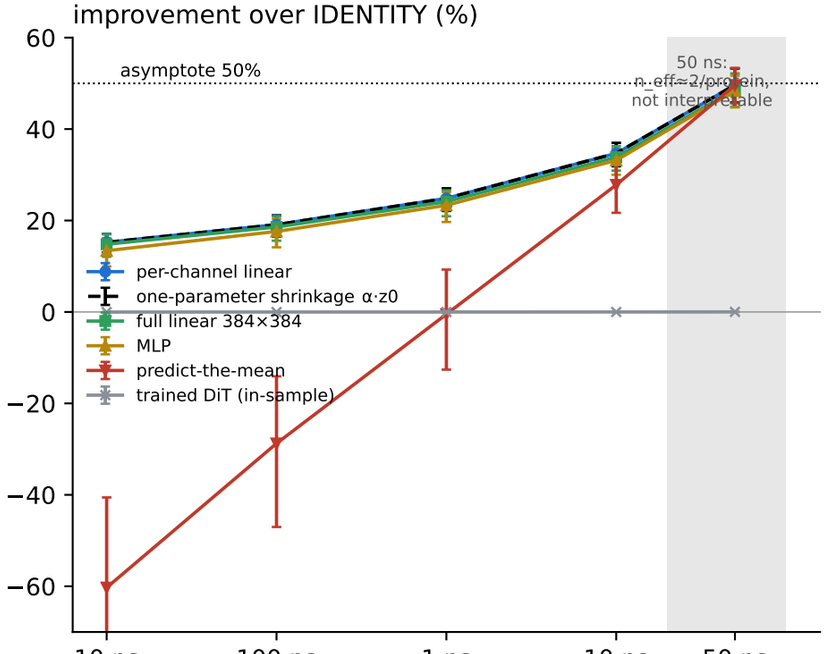
improvement over IDENTITY (%)
asymptote 50%
50 ns:
n_eff≈2/protein,
not interpretable
per-channel linear
one-parameter shrinkage α·z0
full linear 384×384
MLP
predict-the-mean
trained DiT (in-sample)
60
40
20
0
−20
−40
−60
10 ps
100 ps
1 ns
10 ns
50 ns
lag

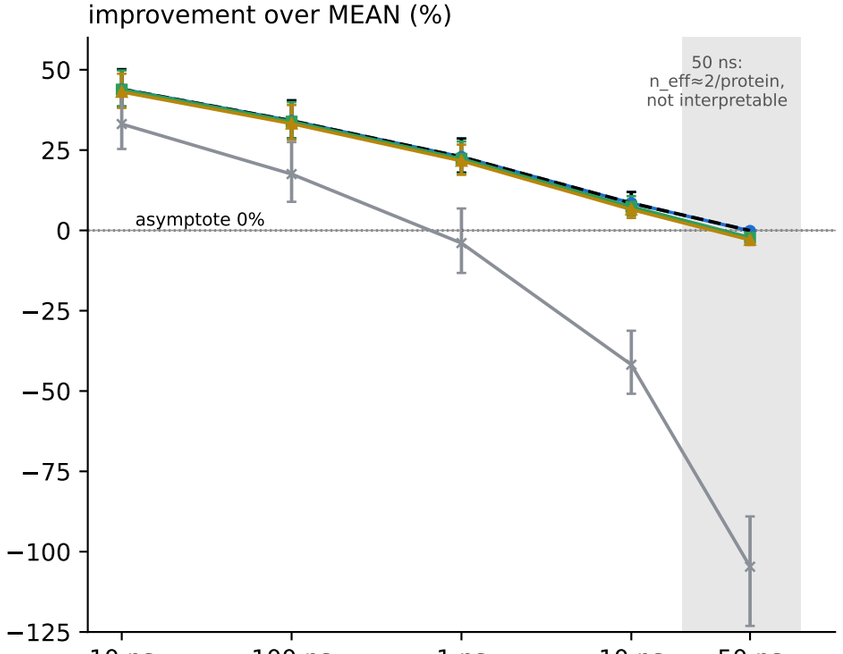
improvement over MEAN (%)
asymptote 0%
50 ns:
n_eff≈2/protein,
not interpretable
50
25
0
−25
−50
−75
−100
−125
10 ps
100 ps
1 ns
10 ns
50 ns
lag

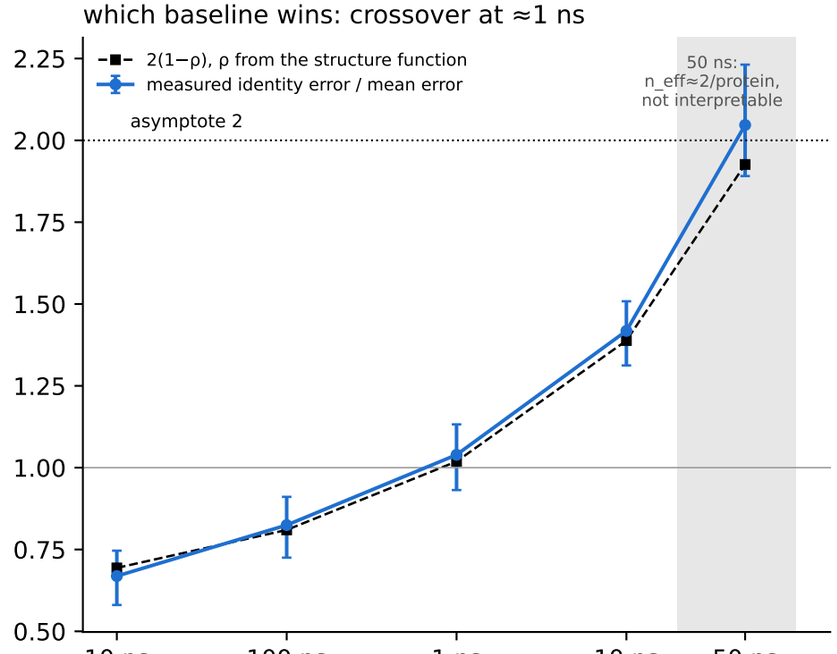
which baseline wins: crossover at ≈1 ns
2(1−ρ), ρ from the structure function
measured identity error / mean error
asymptote 2
50 ns:
n_eff≈2/protein,
not interpretable
2.25
2.00
1.75
1.50
1.25
1.00
0.75
0.50
10 ps
100 ps
1 ns
10 ns
50 ns
lag