

Neural Network Basics

9/10 points (90%)

Quiz, 10 questions

✓ **Congratulations! You passed!**

Next Item



1 / 1
points

1.

What does a neuron compute?



A neuron computes a linear function ($z = Wx + b$) followed by an activation function



Correct

Correct, we generally say that the output of a neuron is $a = g(Wx + b)$ where g is the activation function (sigmoid, tanh, ReLU, ...).



A neuron computes a function g that scales the input x linearly ($Wx + b$)



A neuron computes the mean of all features before applying the output to an activation function



A neuron computes an activation function followed by a linear function ($z = Wx + b$)

Neural Network Basics

1 / 1

points

9/10 points (90%)

Quiz, 10 questions 2.

Which of these is the "Logistic Loss"?



$$\mathcal{L}^{(i)}(\hat{y}^{(i)}, y^{(i)}) = -(y^{(i)} \log(\hat{y}^{(i)}) + (1 - y^{(i)}) \log(1 - \hat{y}^{(i)}))$$

**Correct**

Correct, this is the logistic loss you've seen in lecture!



$$\mathcal{L}^{(i)}(\hat{y}^{(i)}, y^{(i)}) = |y^{(i)} - \hat{y}^{(i)}|^2$$



$$\mathcal{L}^{(i)}(\hat{y}^{(i)}, y^{(i)}) = \max(0, y^{(i)} - \hat{y}^{(i)})$$



$$\mathcal{L}^{(i)}(\hat{y}^{(i)}, y^{(i)}) = |y^{(i)} - \hat{y}^{(i)}|$$

Neural Network Basics

1 / 1

points

9/10 points (90%)

Quiz, 10 questions

3.

Suppose `img` is a `(32,32,3)` array, representing a 32x32 image with 3 color channels red, green and blue. How do you reshape this into a column vector?

`x = img.reshape((1,32*32,*3))``x = img.reshape((32*32*3,1))`**Correct**`x = img.reshape((32*32,3))``x = img.reshape((3,32*32))`

Neural Network Basics

1 / 1

points

9/10 points (90%)

Quiz, 10 questions 4.

Consider the two following random arrays "a" and "b":

```
1 a = np.random.randn(2, 3) # a.shape = (2, 3)
2 b = np.random.randn(2, 1) # b.shape = (2, 1)
3 c = a + b
```

What will be the shape of "c"?

☐ c.shape = (2, 1)☐ c.shape = (3, 2)☒ c.shape = (2, 3)**Correct**

Yes! This is broadcasting. b (column vector) is copied 3 times so that it can be summed to each column of a.

☐ The computation cannot happen because the sizes don't match. It's going to be "Error"!

Neural Network Basics

1 / 1

points

9/10 points (90%)

Quiz, 10 questions 5.

Consider the two following random arrays "a" and "b":

```
1 a = np.random.randn(4, 3) # a.shape = (4, 3)
2 b = np.random.randn(3, 2) # b.shape = (3, 2)
3 c = a*b
```

What will be the shape of "c"?



The computation cannot happen because the sizes don't match. It's going to be "Error"!

**Correct**

Indeed! In numpy the "*" operator indicates element-wise multiplication. It is different from "np.dot()". If you would try "c = np.dot(a,b)" you would get c.shape = (4, 2).



c.shape = (4,2)



c.shape = (3, 3)



c.shape = (4, 3)

Neural Network Basics

1 / 1

points

9/10 points (90%)

Quiz, 10 questions 6.

Suppose you have n_x input features per example. Recall that

$X = [x^{(1)} x^{(2)} \dots x^{(m)}]$. What is the dimension of X ?

 $(1, m)$  (m, n_x)  $(m, 1)$  (n_x, m) **Correct**

Neural Network Basics

1 / 1

points

9/10 points (90%)

Quiz, 10 questions 7.

Recall that "`np.dot(a,b)`" performs a matrix multiplication on `a` and `b`, whereas "`a*b`" performs an element-wise multiplication.

Consider the two following random arrays "`a`" and "`b`":

```
1 a = np.random.randn(12288, 150) # a.shape = (12288, 150)
2 b = np.random.randn(150, 45) # b.shape = (150, 45)
3 c = np.dot(a,b)
```

What is the shape of `c`?

- ☐ `c.shape = (12288, 150)`
- ☐ The computation cannot happen because the sizes don't match. It's going to be "Error"!
- ☐ `c.shape = (150,150)`
- ☒ `c.shape = (12288, 45)`

Correct

Correct, remember that `np.dot(a, b)` has shape (number of rows of `a`, number of columns of `b`). The sizes match because :

"number of columns of `a` = 150 = number of rows of `b`"

Neural Network Basics

0 / 1
points

9/10 points (90%)

Quiz, 10 questions 8.

Consider the following code snippet:

```
1 # a.shape = (3,4)
2 # b.shape = (4,1)
3
4 for i in range(3):
5     for j in range(4):
6         c[i][j] = a[i][j] + b[j]
```

How do you vectorize this?

 $c = a.T + b.T$  $c = a.T + b$ **This should not be selected** $c = a + b$  $c = a + b.T$

Neural Network Basics

1 / 1

points

9/10 points (90%)

Quiz, 10 questions 9.

Consider the following code:

```
1 a = np.random.randn(3, 3)
2 b = np.random.randn(3, 1)
3 c = a*b
```

What will be c? (If you're not sure, feel free to run this in python to find out).



This will invoke broadcasting, so b is copied three times to become (3,3), and * is an element-wise product so c.shape will be (3, 3)

**Correct**

This will invoke broadcasting, so b is copied three times to become (3, 3), and * invokes a matrix multiplication operation of two 3x3 matrices so c.shape will be (3, 3)



This will multiply a 3x3 matrix a with a 3x1 vector, thus resulting in a 3x1 vector. That is, c.shape = (3,1).



It will lead to an error since you cannot use "*" to operate on these two matrices. You need to instead use np.dot(a,b)


Neural Network Basics

1 / 1
points

9/10 points (90%)

Quiz, 10 questions 10.

Consider the following computation graph.

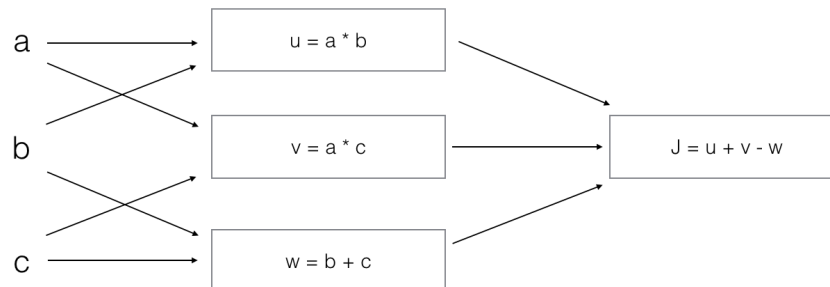

What is the output J?

☐ $J = (c - 1) * (b + a)$

☒ $J = (a - 1) * (b + c)$

Correct

Yes. $J = u + v - w = a * b + a * c - (b + c) = a * (b + c) - (b + c) = (a - 1) * (b + c)$.

☐ $J = a * b + b * c + a * c$

☐ $J = (b - 1) * (c + a)$



Neural Network Basics

9/10 points (90%)

Quiz, 10 questions