MERN stack - Shopping Online

Trang Hồng Sơn

tranghongson@gmail.com

Outline

1. Shopping Online

1.1 Functionals

1.1.1 Customer - add2cart

1.1.2 Customer - mycart

1.1.3 Customer - remove2cart

1.1.4 Customer - checkout

1.1.5 Customer - myorders

1.1.6 Admin - listorder

1.1.7 Admin - updatestatus

1.1.8 Admin - listcustomer

1.1.9 Admin - deactive

1.1.10 Admin - sendmail

Outline

1. Shopping Online

1.1 Functionals


1.1.1 Customer - add2cart
1.1.2 Customer - mycart
1.1.3 Customer - remove2cart
1.1.4 Customer - checkout
1.1.5 Customer - myorders
1.1.6 Admin - listorder
1.1.7 Admin - updatestatus
1.1.8 Admin - listcustomer
1.1.9 Admin - deactive
1.1.10 Admin - sendmail

Outline

1. Shopping Online
1.1 Functionals
1.1.1 Customer - add2cart
1.1.2 Customer - mycart
1.1.3 Customer - remove2cart
1.1.4 Customer - checkout
1.1.5 Customer - myorders
1.1.6 Admin - listorder
1.1.7 Admin - updatestatus
1.1.8 Admin - listcustomer
1.1.9 Admin - deactive
1.1.10 Admin - sendmail

Customer - add2cart

- Client-customer:

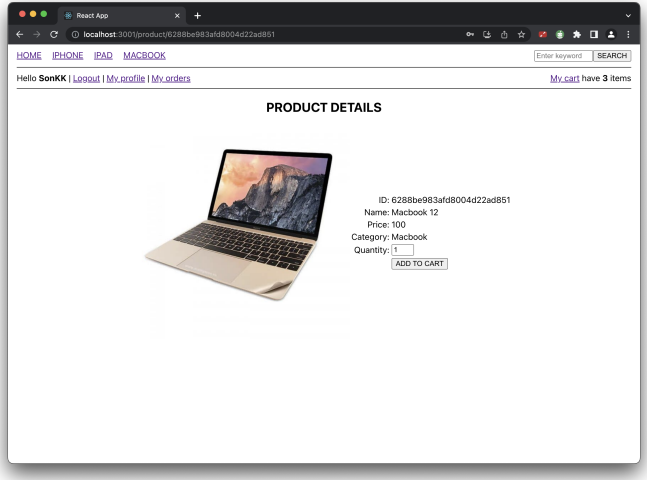


Outline

1. Shopping Online
1.1 Functionals
1.1.1 Customer - add2cart
1.1.2 Customer - mycart
1.1.3 Customer - remove2cart
1.1.4 Customer - checkout
1.1.5 Customer - myorders
1.1.6 Admin - listorder
1.1.7 Admin - updatestatus
1.1.8 Admin - listcustomer
1.1.9 Admin - deactive
1.1.10 Admin - sendmail

Customer - mycart

- Client-customer:

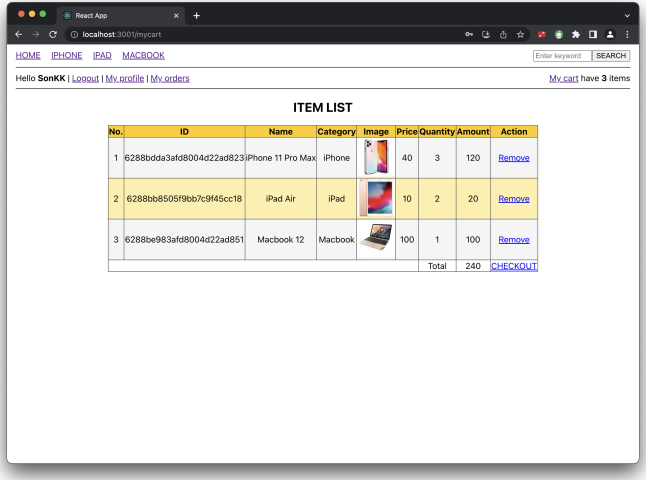

Outline

1. Shopping Online

1.1 Functionals

1.1.1 Customer - add2cart

1.1.2 Customer - mycart

1.1.3 Customer - remove2cart

1.1.4 Customer - checkout

1.1.5 Customer - myorders

1.1.6 Admin - listorder

1.1.7 Admin - updatestatus


1.1.8 Admin - listcustomer

1.1.9 Admin - deactive

1.1.10 Admin - sendmail

Customer - remove2cart

- Client-customer:

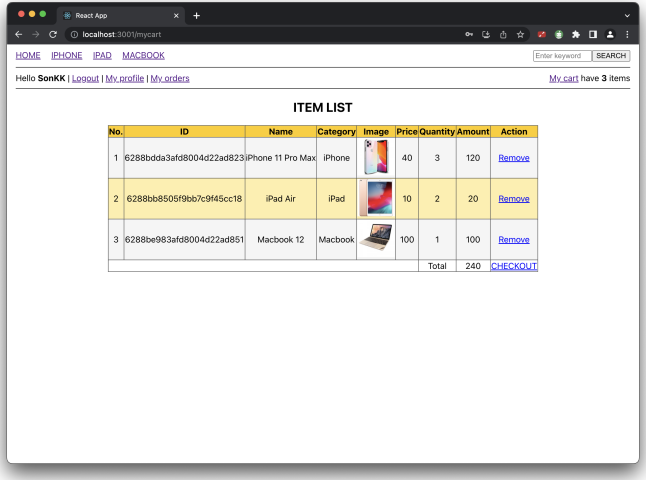

Outline

1. Shopping Online

1.1 Functionals

1.1.1 Customer - add2cart

1.1.2 Customer - mycart

1.1.3 Customer - remove2cart

1.1.4 Customer - checkout

1.1.5 Customer - myorders

1.1.6 Admin - listorder

1.1.7 Admin - updatestatus


1.1.8 Admin - listcustomer

1.1.9 Admin - deactive

1.1.10 Admin - sendmail

Customer - checkout

- Server: (POST) http://localhost:3000/api/customer/checkout
  - Headers: "x-access-token": <token>
  - Body(raw+JSON): { ... }
- Client-customer:

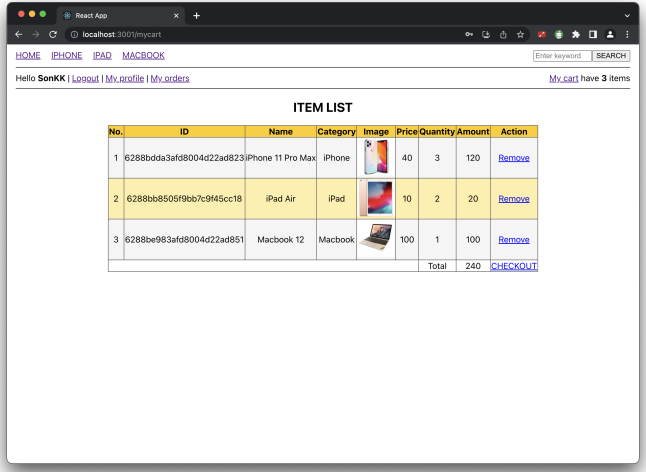

Outline

1. Shopping Online

1.1 Functionals

1.1.1 Customer - add2cart

1.1.2 Customer - mycart

1.1.3 Customer - remove2cart

1.1.4 Customer - checkout

1.1.5 Customer - myorders

1.1.6 Admin - listorder

1.1.7 Admin - updatestatus


1.1.8 Admin - listcustomer

1.1.9 Admin - deactive

1.1.10 Admin - sendmail

Customer - myorders

- Server: (GET) http://localhost:3000/api/customer/orders/customer/<cid>
  - Headers: "x-access-token": <token>
- Client-customer:

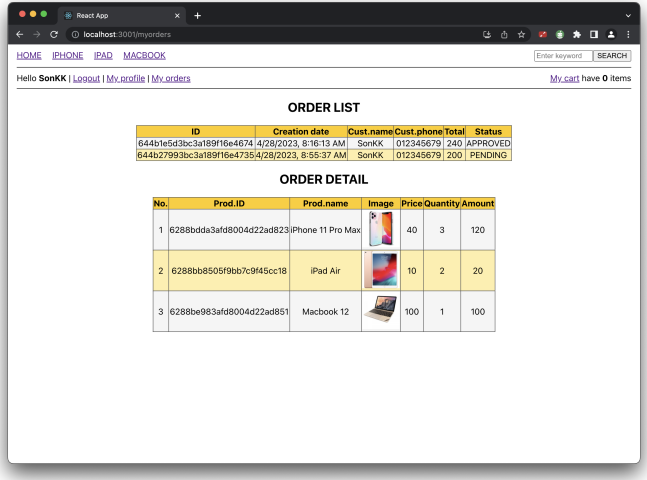

Outline

1. Shopping Online

1.1 Functionals

1.1.1 Customer - add2cart

1.1.2 Customer - mycart

1.1.3 Customer - remove2cart

1.1.4 Customer - checkout

1.1.5 Customer - myorders

1.1.6 Admin - listorder

1.1.7 Admin - updatestatus


1.1.8 Admin - listcustomer

1.1.9 Admin - deactive

1.1.10 Admin - sendmail

Admin - listorder

- Server: (GET) http://localhost:3000/api/admin/orders
  - Headers: "x-access-token": <token>
- Client-admin:

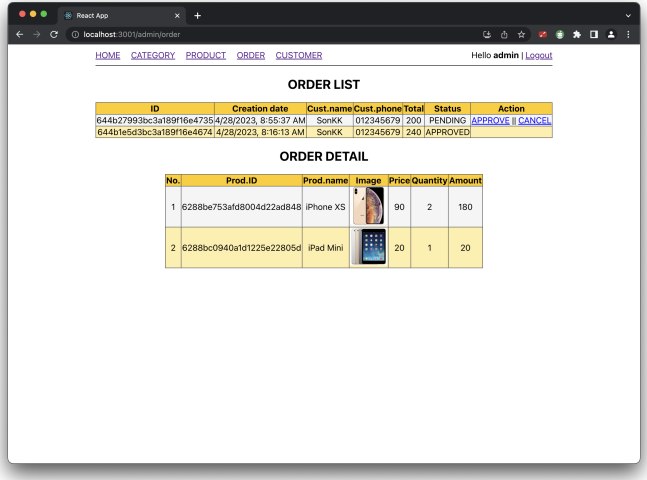

Outline

1. Shopping Online

1.1 Functionals

1.1.1 Customer - add2cart

1.1.2 Customer - mycart

1.1.3 Customer - remove2cart

1.1.4 Customer - checkout

1.1.5 Customer - myorders

1.1.6 Admin - listorder

1.1.7 Admin - updatestatus


1.1.8 Admin - listcustomer

1.1.9 Admin - deactive

1.1.10 Admin - sendmail

Admin - updatestatus

- Server: (PUT) http://localhost:3000/api/admin/orders/status/<id>
  - Headers: "x-access-token": <token>
  - Body (raw+JSON): { "status": "APPROVED" } or { "status": "CANCELED" }
- Client-admin:

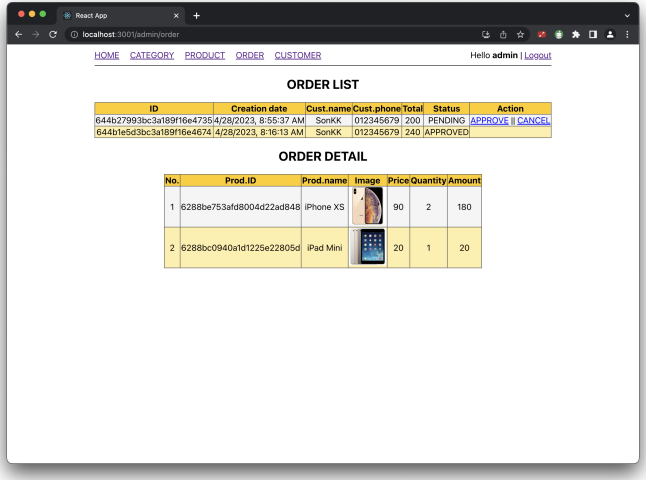

Outline

1. Shopping Online

1.1 Functionals

1.1.1 Customer - add2cart

1.1.2 Customer - mycart

1.1.3 Customer - remove2cart

1.1.4 Customer - checkout

1.1.5 Customer - myorders

1.1.6 Admin - listorder

1.1.7 Admin - updatestatus


1.1.8 Admin - listcustomer

1.1.9 Admin - deactive

1.1.10 Admin - sendmail

Admin - listcustomer

- Server:
  - (GET) http://localhost:3000/api/admin/customers
    - Headers: "x-access-token": <token>
  - (GET) http://localhost:3000/api/admin/orders/customer/<cid>
    - Headers: "x-access-token": <token>
- Client-admin:

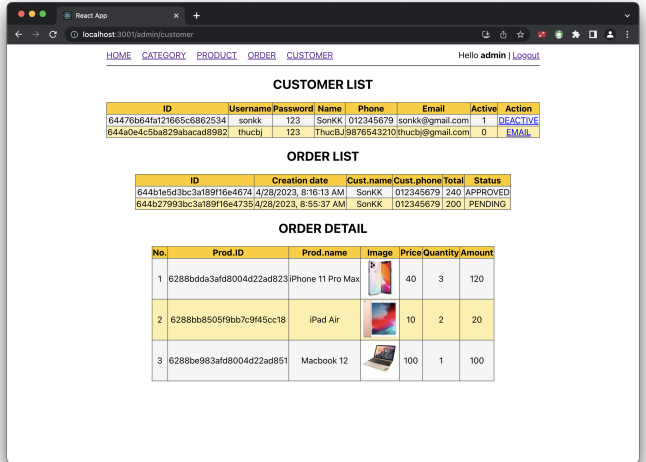

Outline

1. Shopping Online

1.1 Functionals

1.1.1 Customer - add2cart

1.1.2 Customer - mycart

1.1.3 Customer - remove2cart

1.1.4 Customer - checkout

1.1.5 Customer - myorders

1.1.6 Admin - listorder

1.1.7 Admin - updatestatus


1.1.8 Admin - listcustomer

1.1.9 Admin - deactive

1.1.10 Admin - sendmail

Admin - deactive

- Server: (PUT) http://localhost:3000/api/admin/customers/deactive/<id>
  - Headers: "x-access-token": <token>
  - Body (raw+JSON): { "token": "7326926c91439cbb0adf64ced3203a52" }
- Client-admin:

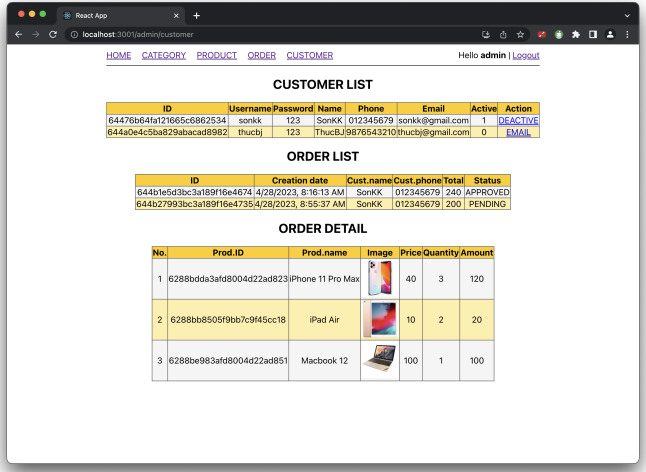

Outline

1. Shopping Online

1.1 Functionals

1.1.1 Customer - add2cart

1.1.2 Customer - mycart

1.1.3 Customer - remove2cart

1.1.4 Customer - checkout

1.1.5 Customer - myorders

1.1.6 Admin - listorder

1.1.7 Admin - updatestatus

1.1.8 Admin - listcustomer

1.1.9 Admin - deactive

1.1.10 Admin - sendmail

Admin - sendmail

- Server: (GET) http://localhost:3000/api/admin/customers/sendmail/<id>
  - Headers: "x-access-token": <token>
- Client-admin:

