LDA stability — revision (new CNIO dates)

Protocol identical to results/lda/stability/, profiles from
data/revision/user_embeddings_revision_a0.csv; reference LDA_model_vdec25 unchanged.
K=6 · 50 reps · 100 passes · leave-out 20%. 95/175 sequences differ vs lock-date.
Conclusion: stability metrics essentially unchanged (Δ ≈ ±0.00–0.01).

Headline comparison (revision vs prior)

Metric	Prior	Revision	Δ
L1 median cosine (all)	0.912	0.915	+0.003
L1 mean-cosine / rep	0.883	0.884	+0.000
L1 fav hypertopic	0.960	0.960	+0.000
L1 unfav hypertopic	0.919	0.916	-0.003
L1 pUF Pearson r	0.839	0.849	+0.010
L2 median cosine (all)	0.867	0.867	-0.000
L2 mean-cosine / rep	0.797	0.794	-0.002
L2 fav hypertopic	0.933	0.937	+0.003
L2 unfav hypertopic	0.896	0.885	-0.011
L2 pUF Pearson r	0.754	0.772	+0.018


Level 1 — per-topic median cosine

Metric	Prior	Revision	Δ
T0	0.981	0.981	+0.000
T1	0.914	0.914	+0.000
T2	0.958	0.957	-0.001
T3	0.871	0.875	+0.005
T4	0.883	0.884	+0.002
T5	0.695	0.691	-0.003


Level 2 — per-topic median cosine

Metric	Prior	Revision	Δ
T0	0.963	0.965	+0.002
T1	0.885	0.882	-0.003
T2	0.894	0.909	+0.015
T3	0.808	0.815	+0.007
T4	0.798	0.797	-0.001
T5	0.671	0.668	-0.004


Level 1 — seed stability (cosine)

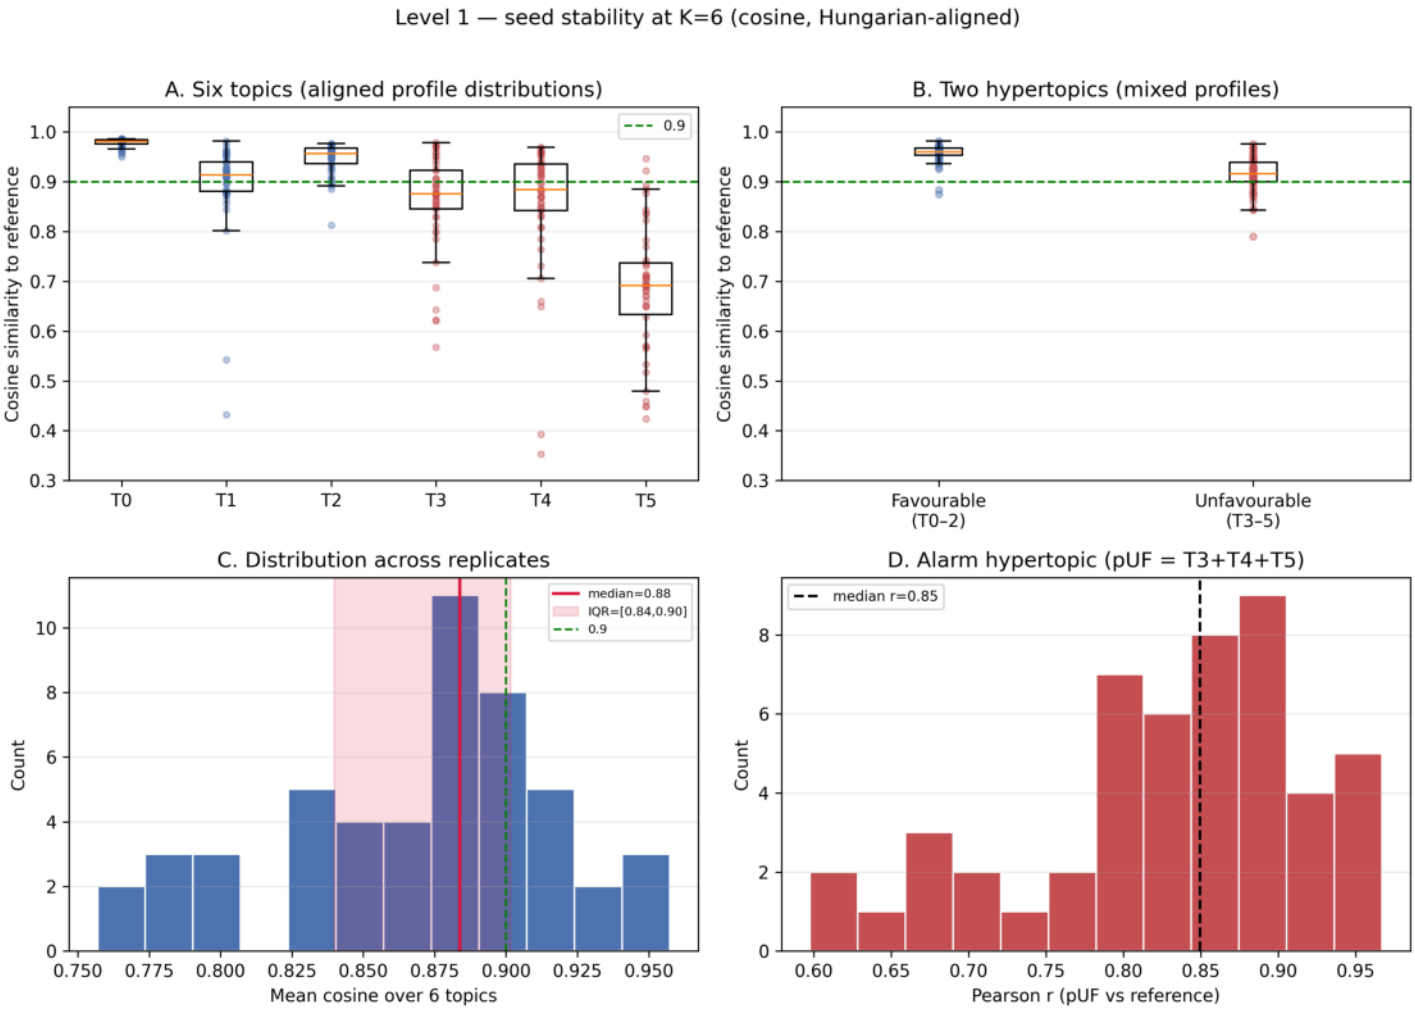

Level 1 — profile heatmap

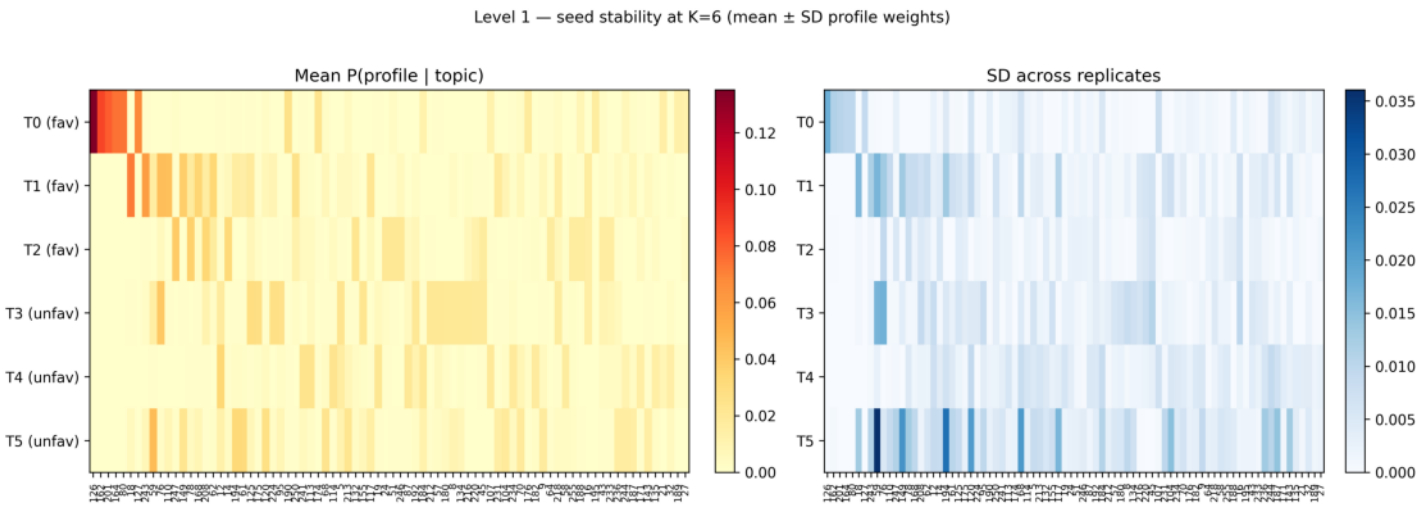

Level 2 — leave-20%-out (cosine)

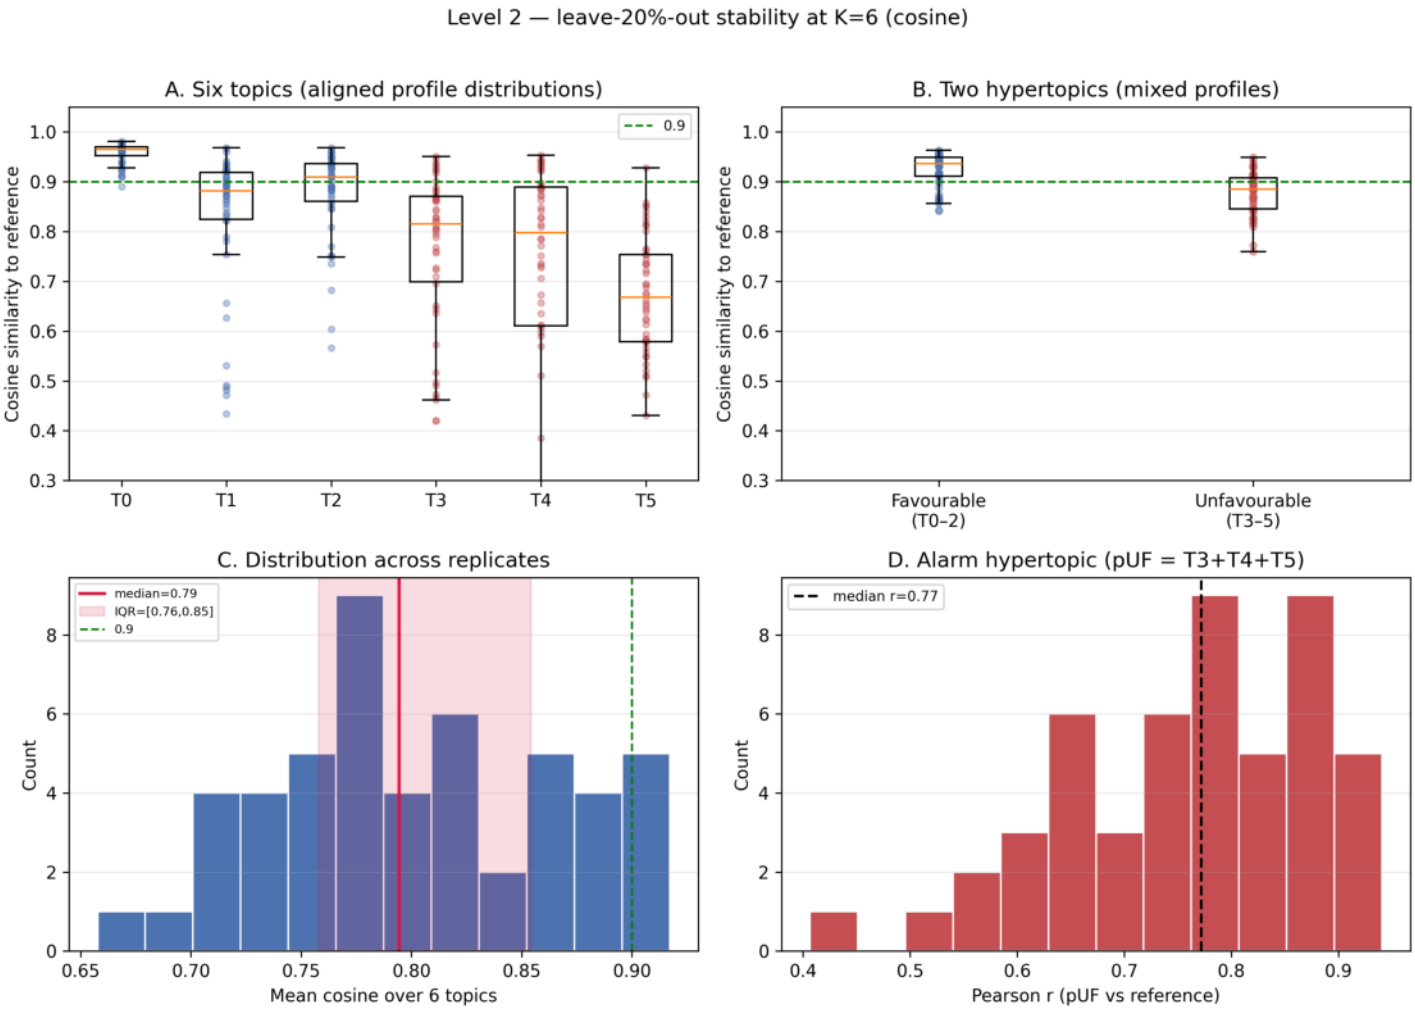

Level 2 — profile heatmap

