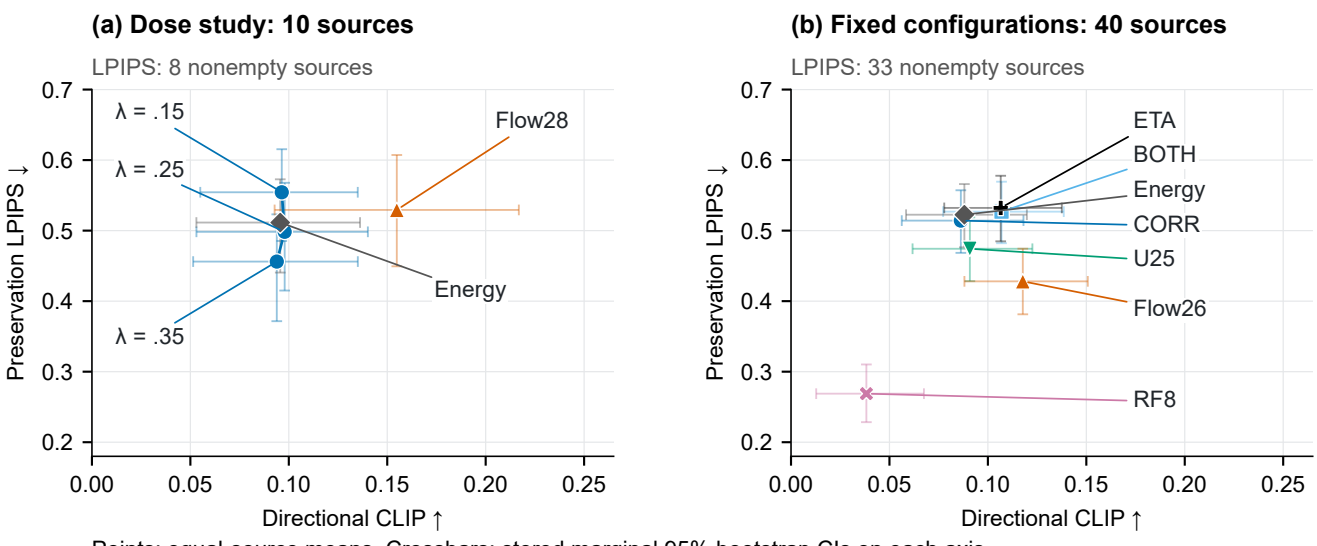


Points: equal-source means. Crossbars: stored marginal 95% bootstrap CIs on each axis.

Only the three same-population λ settings are connected; fixed configurations are separate points.

The panels use different source populations; crossbars are not joint confidence regions.