


Example

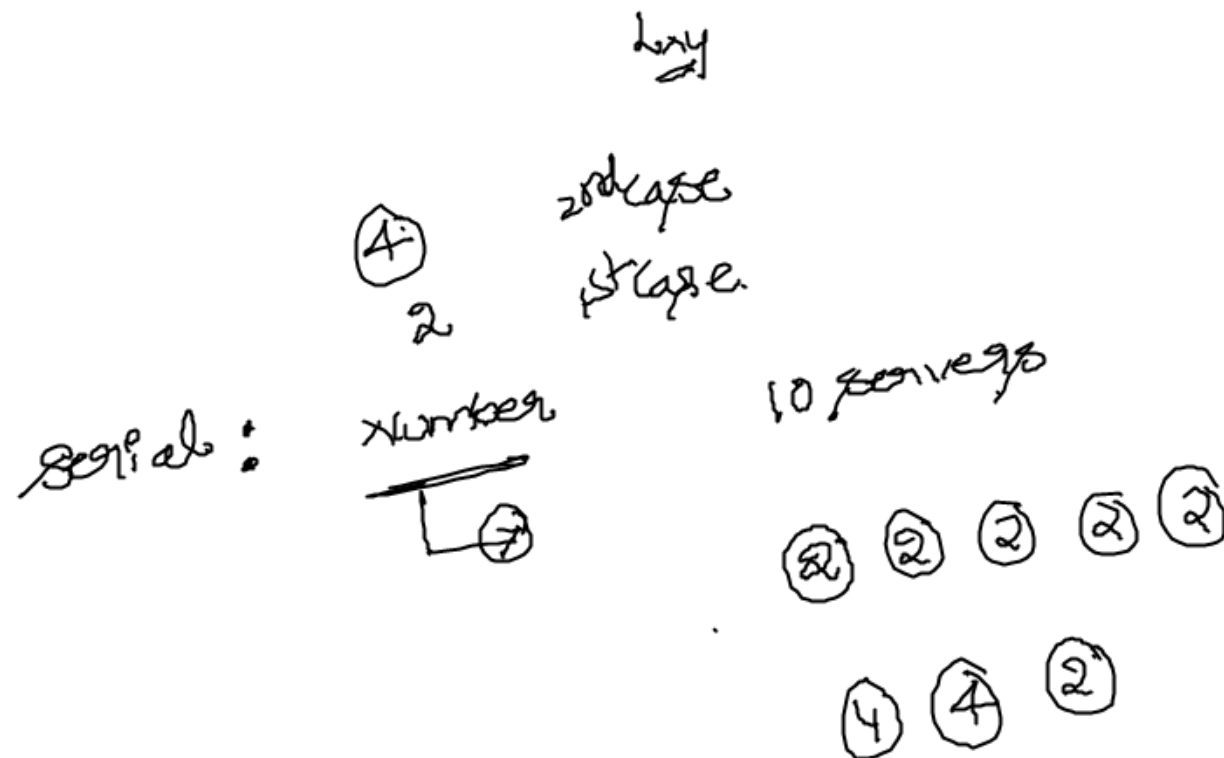

secret management (vault)

{ variables
 ||
 encrypted }

limiting execution

~~Ansible~~

1000 ✓
up

down
① ✓

playbook — on all servers 2/9

on few servers

limit

⏏


we run playbook

ⓧ

1000 servers

900

{ 100 servers failed }

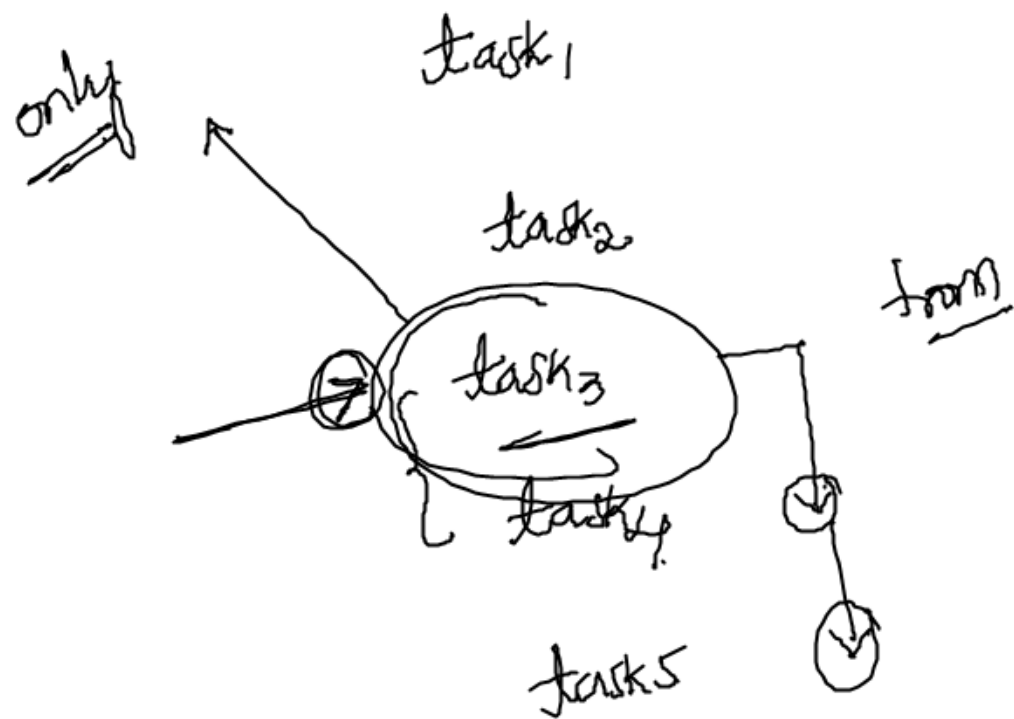

2 playbooks

↳ ~~Inside playbook~~

play1.yml

play2.yml


? import_playbook : playname

40

apache Config

handler

operates
{ handles work }

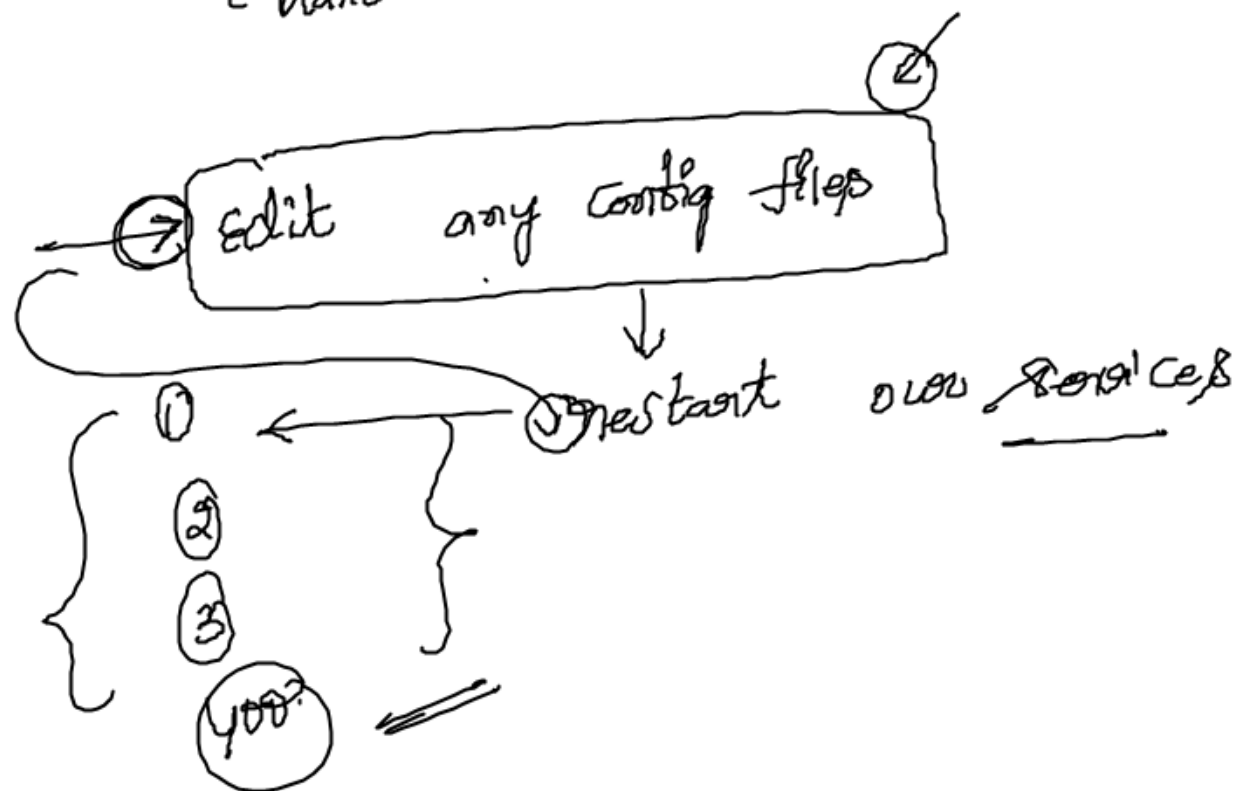

tasks :

handlers :

notify: apache restart

- name: → apache restart

systemd;

name: httpd

state: restarted

