CiteSeer: matched utility and retraining-disagreement readouts

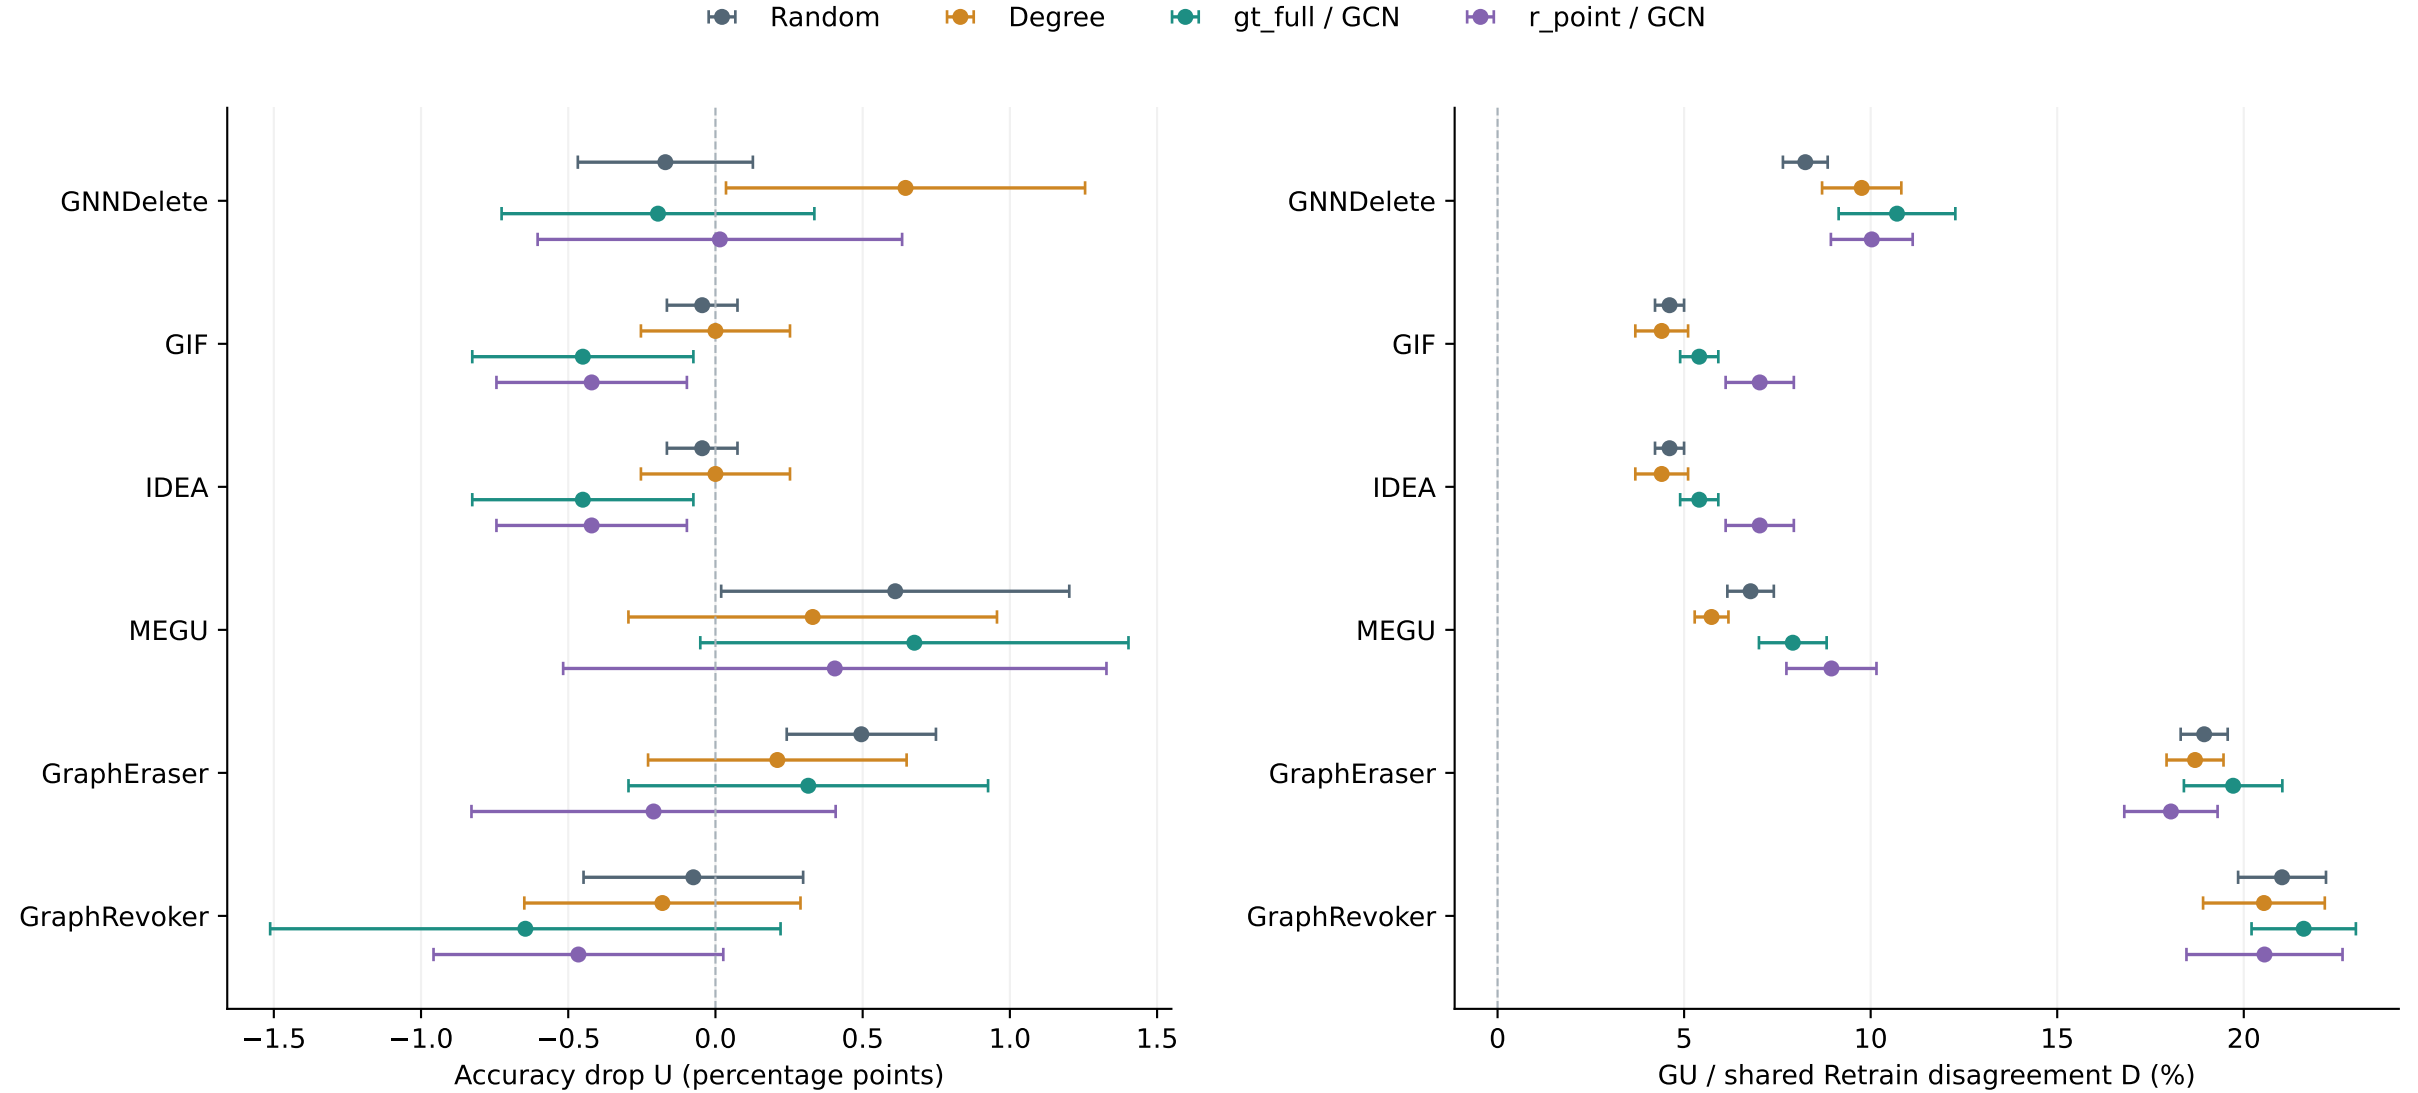

Pointwise 95% t CIs; n = 10 training seeds; Random averages 3 requests within each seed. Stored f1 = accuracy (micro-F1).
Shared GCN Retrain can include method-family differences. GIF / IDEA match; small means or overlapping CIs do not establish equivalence.