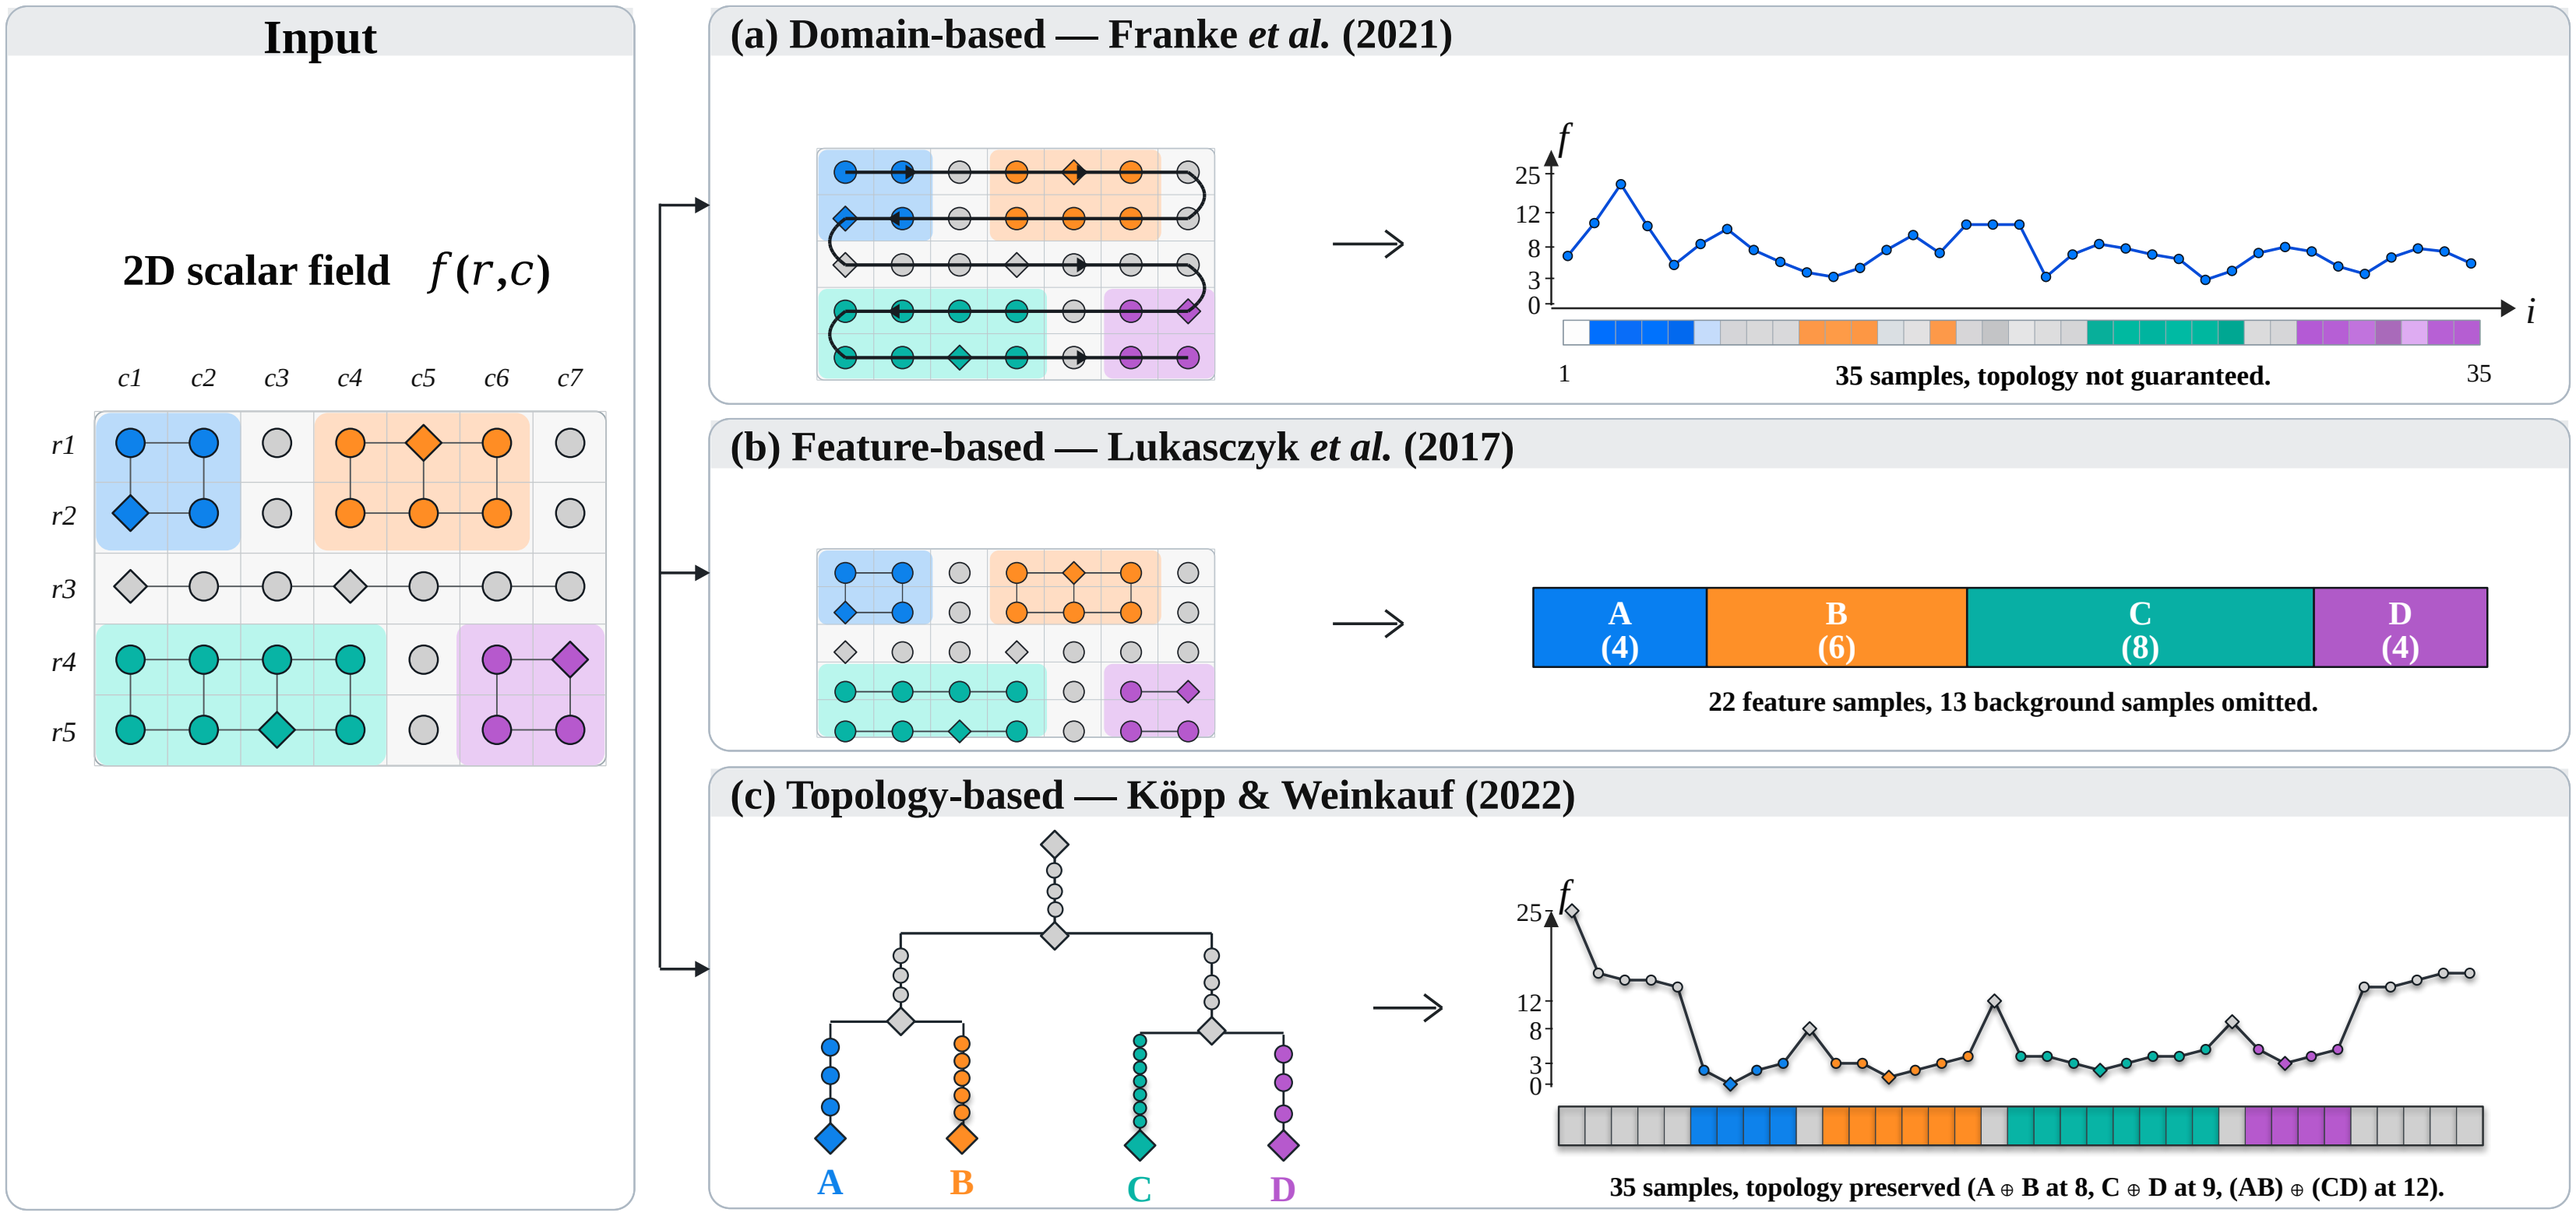

Input
2D scalar field $f(r,c)$
c1
c2
c3
c4
c5
c6
c7
r1
r2
r3
r4
r5
(a) Domain-based — Franke et al. (2021)
f
25
12
8
3
0
i
1
35 samples, topology not guaranteed.
35
(b) Feature-based — Lukasczyk et al. (2017)
A (4)
B (6)
C (8)
D (4)
22 feature samples, 13 background samples omitted.
(c) Topology-based — Köpp & Weinkauf (2022)
A
B
C
D
f
25
12
8
3
0
35 samples, topology preserved (A ⊕ B at 8, C ⊕ D at 9, (AB) ⊕ (CD) at 12).