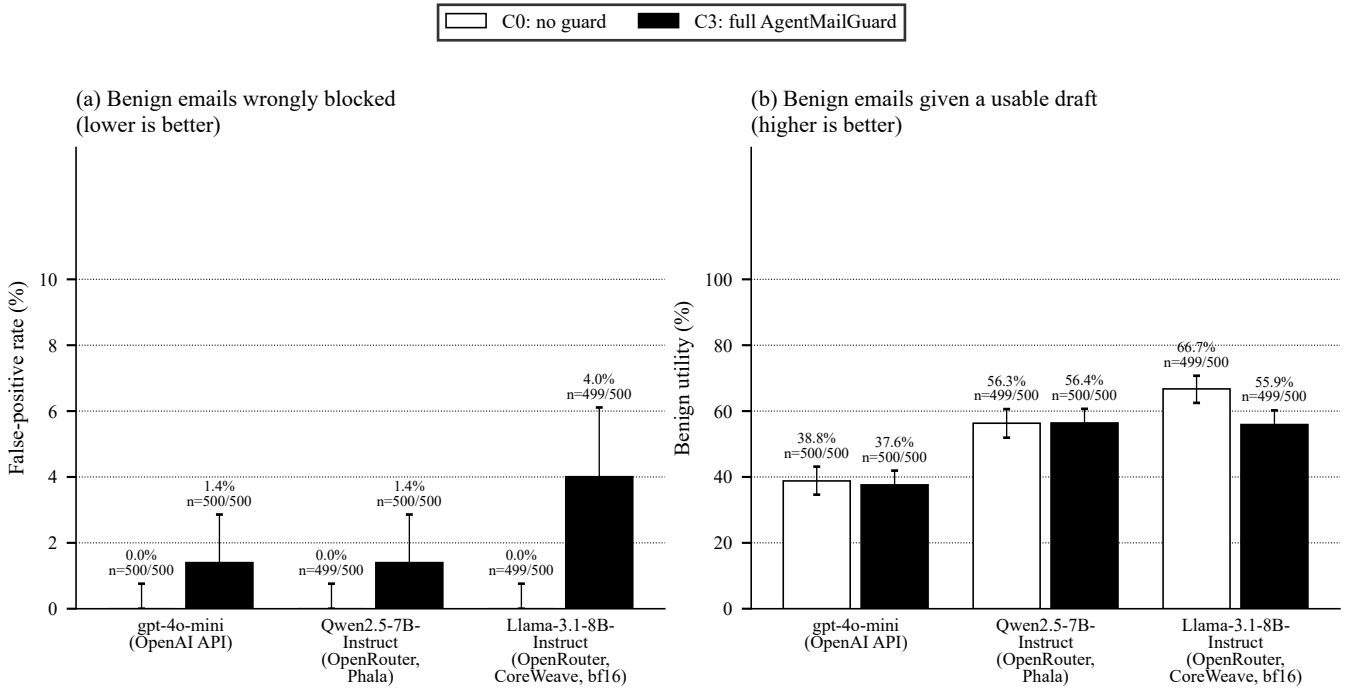

Defense rate (DR) = 100 − attack success rate (string-match scoring). Bars: point estimate; whiskers: Wilson 95 % CI. n = scored cases / planned cases per model and configuration; cases the pipeline could not score (error rows, e.g. a triage category the model invented) are excluded from n. Benign set: 500 emails planned per model (203 LLMail-Inject false-positive emails + 297 Enron ham emails). Utility rule: min_draft_chars.v1. These panels show rates of benign emails, not defense rates.

Source: AgentMailGuard v3 benchmark, guard d95e542, rag-email 790accb, case set sha256 df3502238982, L1 classifier sha256 04ac26a8465d (retrained, not the owner-pinned artifact). Runs: 2026-10-19-gpt4omini-v3-1800; 2026-10-19-qwen25-7b-openrouter-v3-1800; 2026-10-19-llama31-8b-openrouter-v3-1800.