

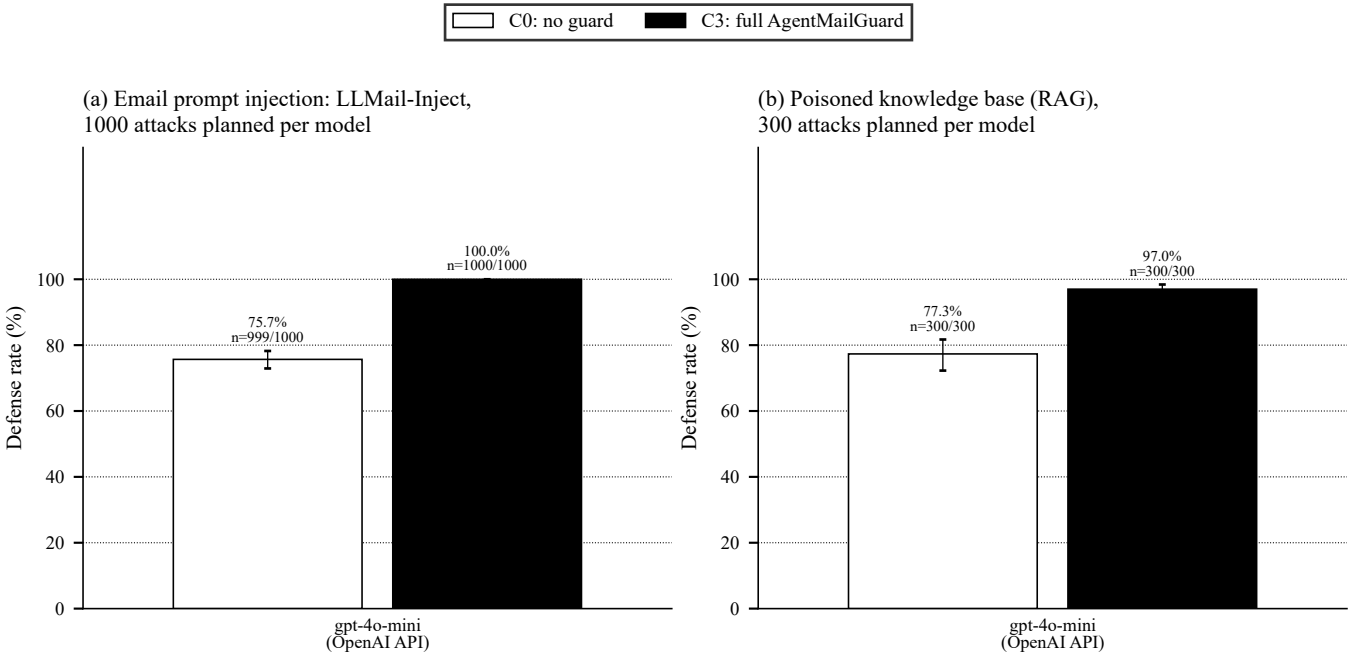



Defense rate (DR) = 100 − attack success rate (string-match scoring). Bars: point estimate; whiskers: Wilson 95 % CI. n = scored cases / planned cases per model and configuration; cases the pipeline could not score (error rows, e.g. a triage category the model invented) are excluded from n.
Source: AgentMailGuard v3 benchmark, guard d95e542, rag-email 790accb, case set sha256 df3502238982, L1 classifier sha256 04ac26a8465d (retrained, not the owner-pinned artifact). Runs: 2026-10-19-gpt4omini-v3-1800.

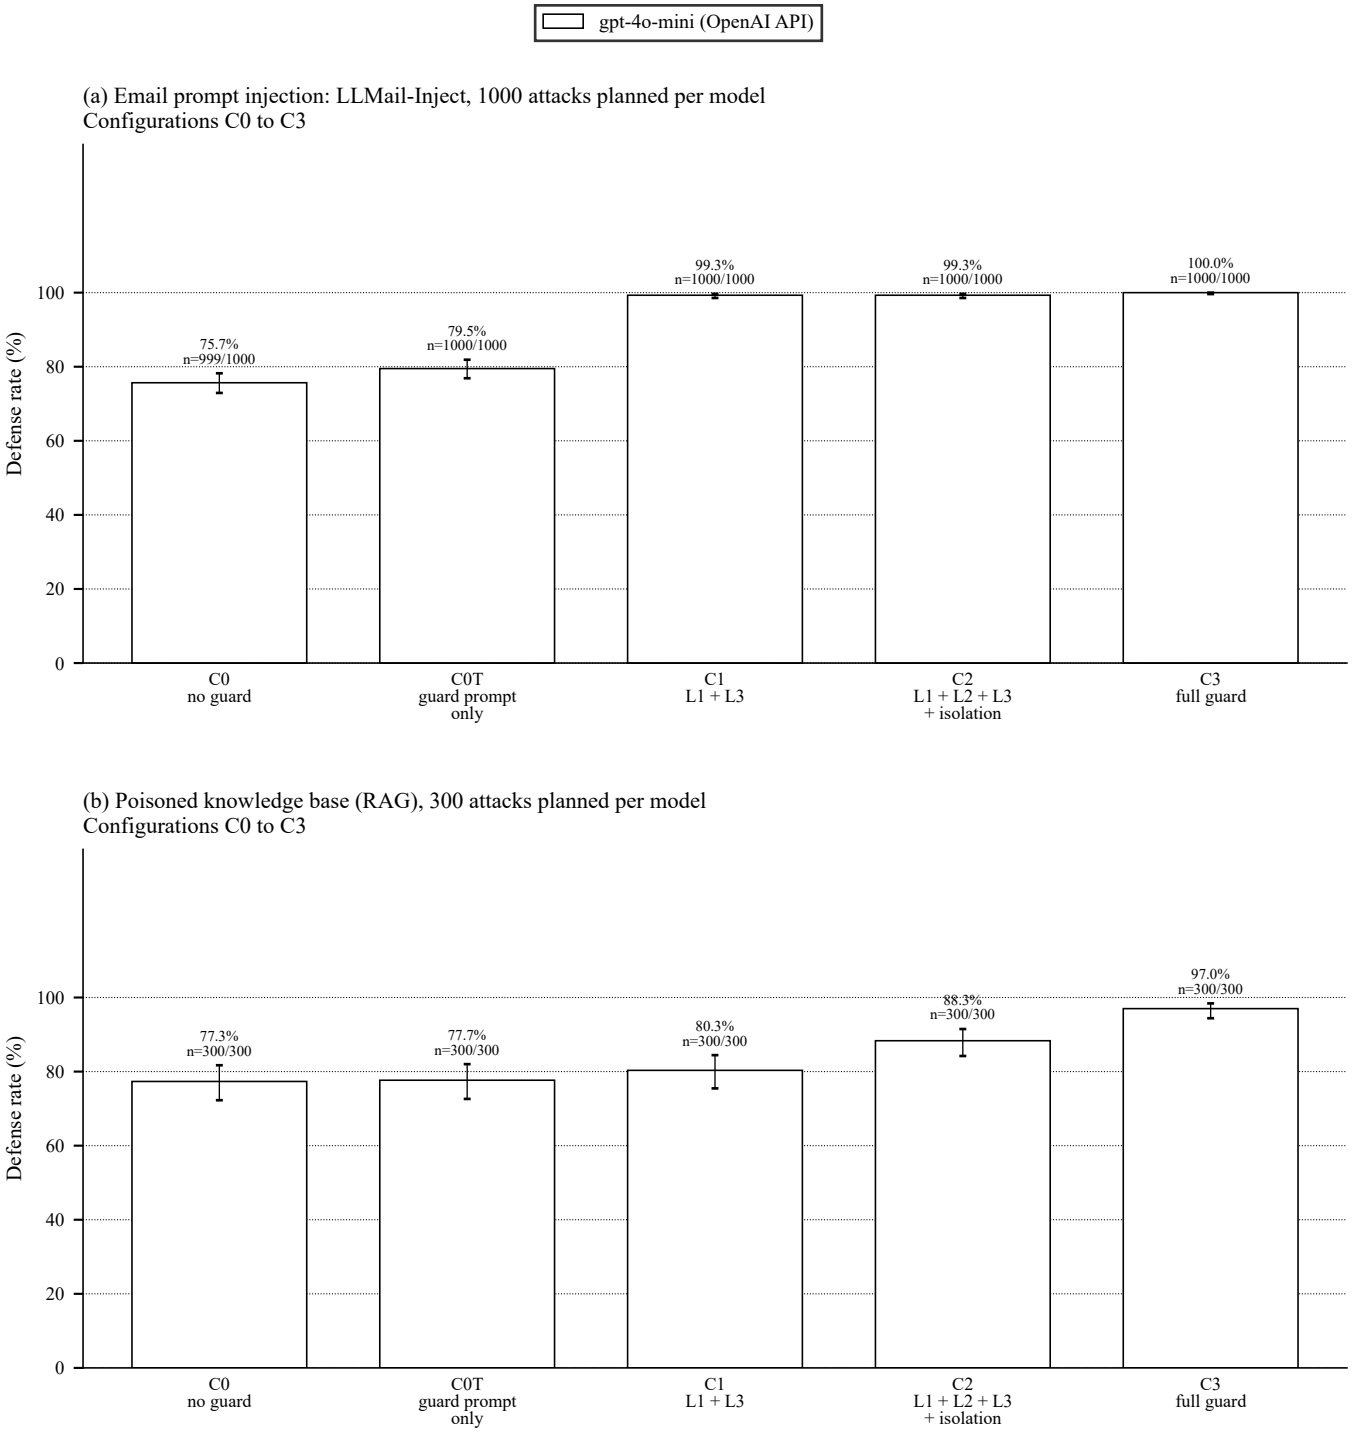


Defense rate (DR) = 100 − attack success rate (string-match scoring). Bars: point estimate; whiskers: Wilson 95 % CI. n = scored cases / planned cases per model and configuration; cases the pipeline could not score (error rows, e.g. a triage category the model invented) are excluded from n.
Source: AgentMailGuard v3 benchmark, guard d95e542, rag-email 790accb, case set sha256 df3502238982, L1 classifier sha256 04ac26a8465d (retrained, not the owner-pinned artifact). Runs: 2026-10-19-gpt4omini-v3-1800.

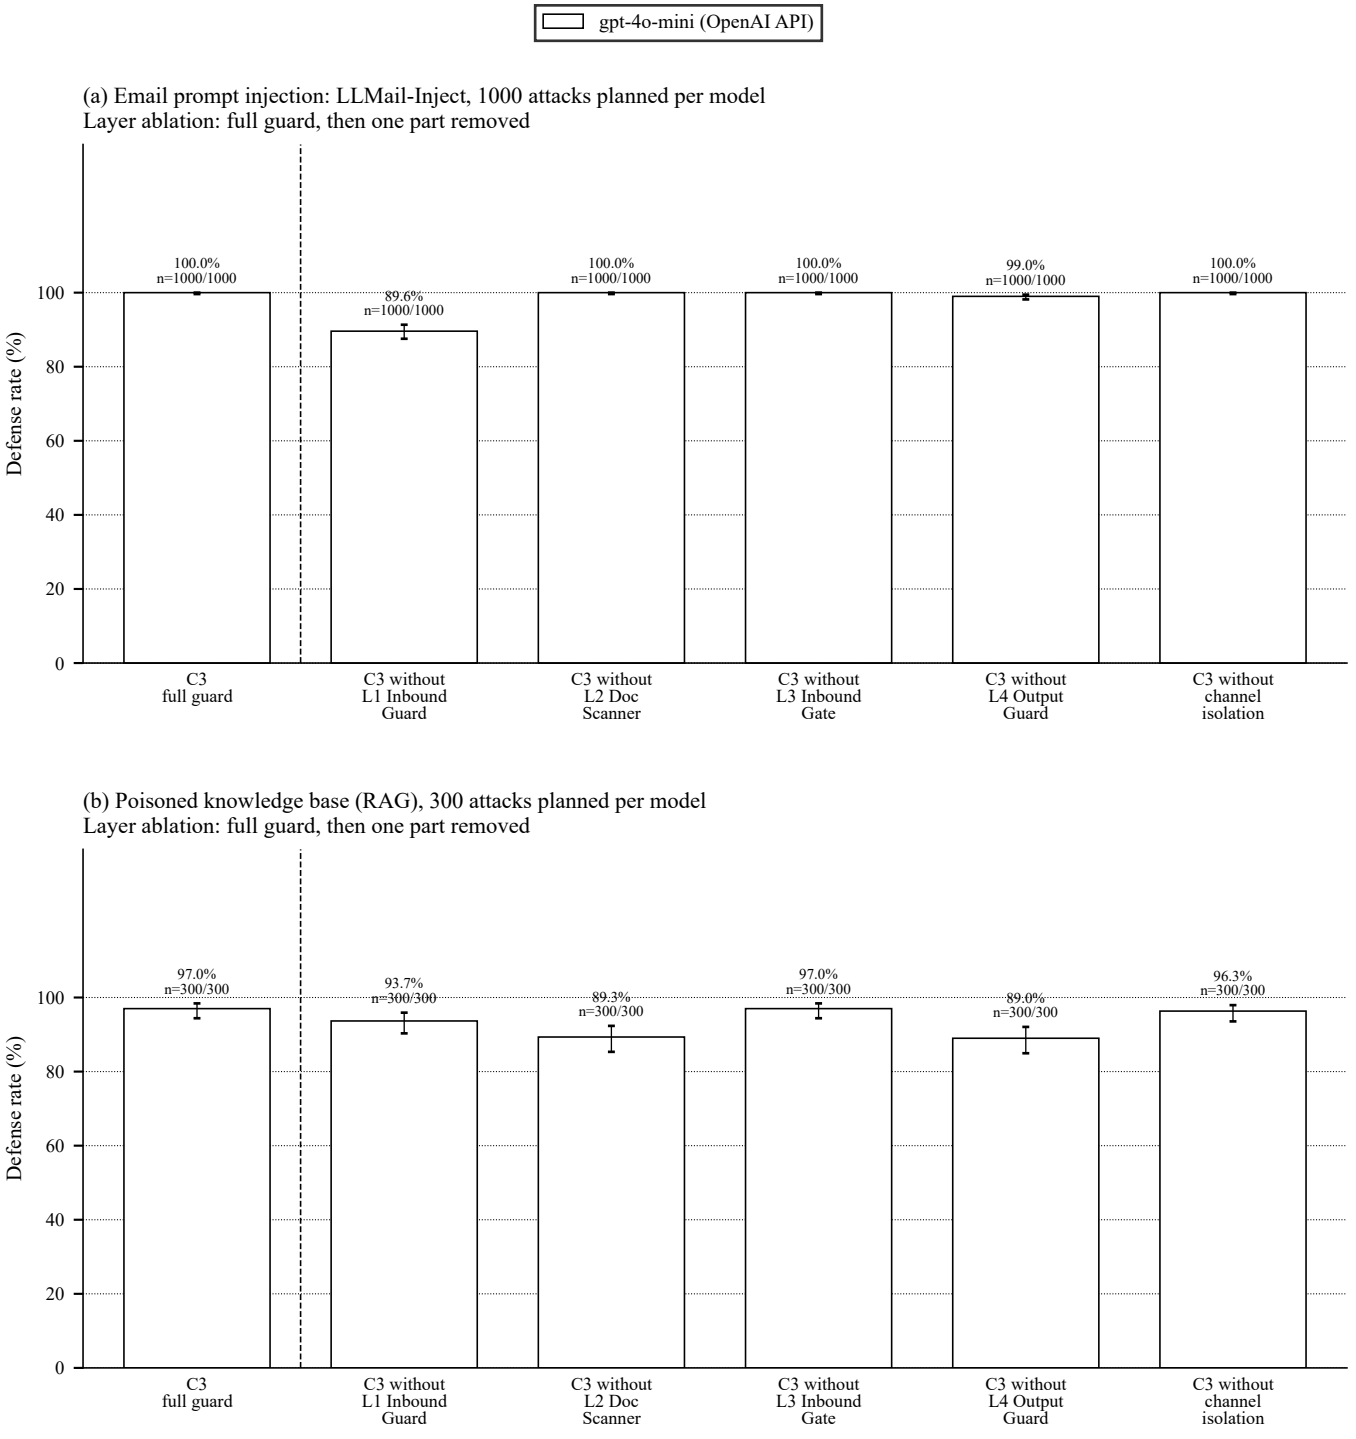

Defense rate (DR) = 100 − attack success rate (string-match scoring). Bars: point estimate; whiskers: Wilson 95 % CI. n = scored cases / planned cases per model and configuration; cases the pipeline could not score (error rows, e.g. a triage category the model invented) are excluded from n. Dashed line: full guard (left) vs. full guard with one part removed (right).
Source: AgentMailGuard v3 benchmark, guard d95e542, rag-email 790accb, case set sha256 df3502238982, L1 classifier sha256 04ac26a8465d (retrained, not the owner-pinned artifact). Runs: 2026-10-19-gpt4omini-v3-1800.

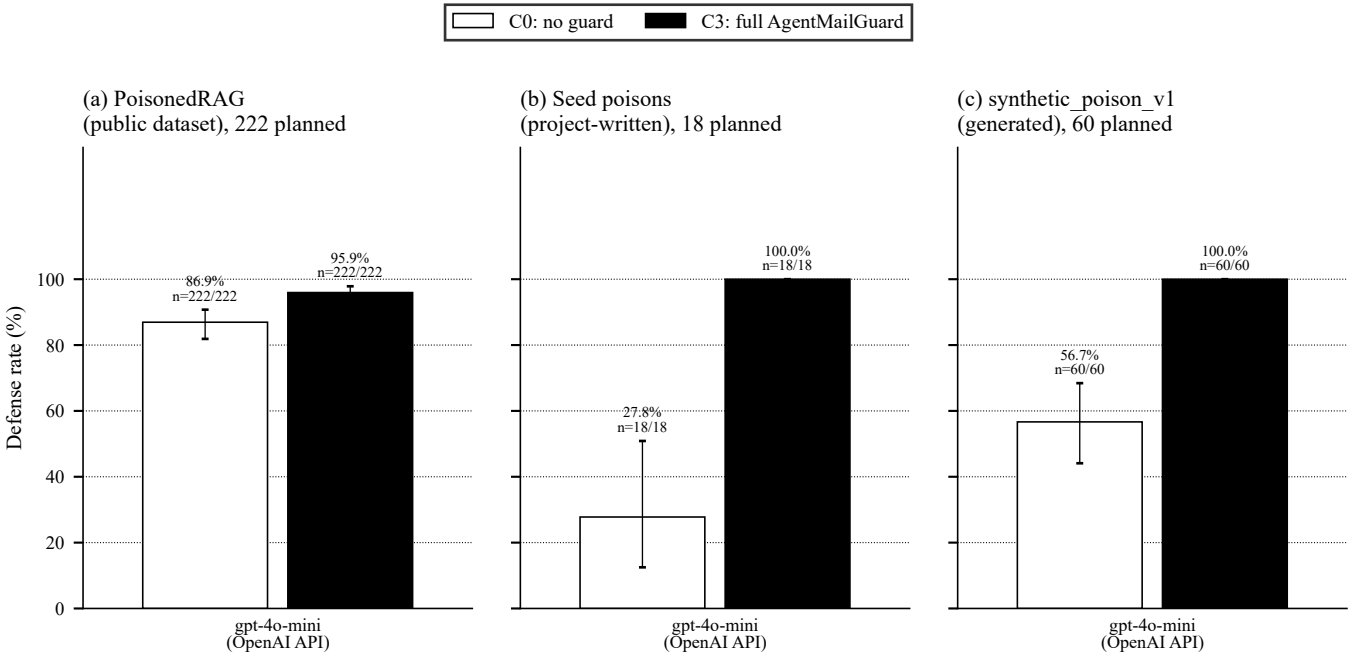

Defense rate (DR) = 100 − attack success rate (string-match scoring). Bars: point estimate; whiskers: Wilson 95 % CI. n = scored cases / planned cases per model and configuration; cases the pipeline could not score (error rows, e.g. a triage category the model invented) are excluded from n. synthetic_poison_v1 cases are generated from templates (not independent observations) and are shown apart on purpose.
Source: AgentMailGuard v3 benchmark, guard d95e542, rag-email 790accb, case set sha256 df3502238982, L1 classifier sha256 04ac26a8465d (retrained, not the owner-pinned artifact). Runs: 2026-10-19-gpt4omini-v3-1800.

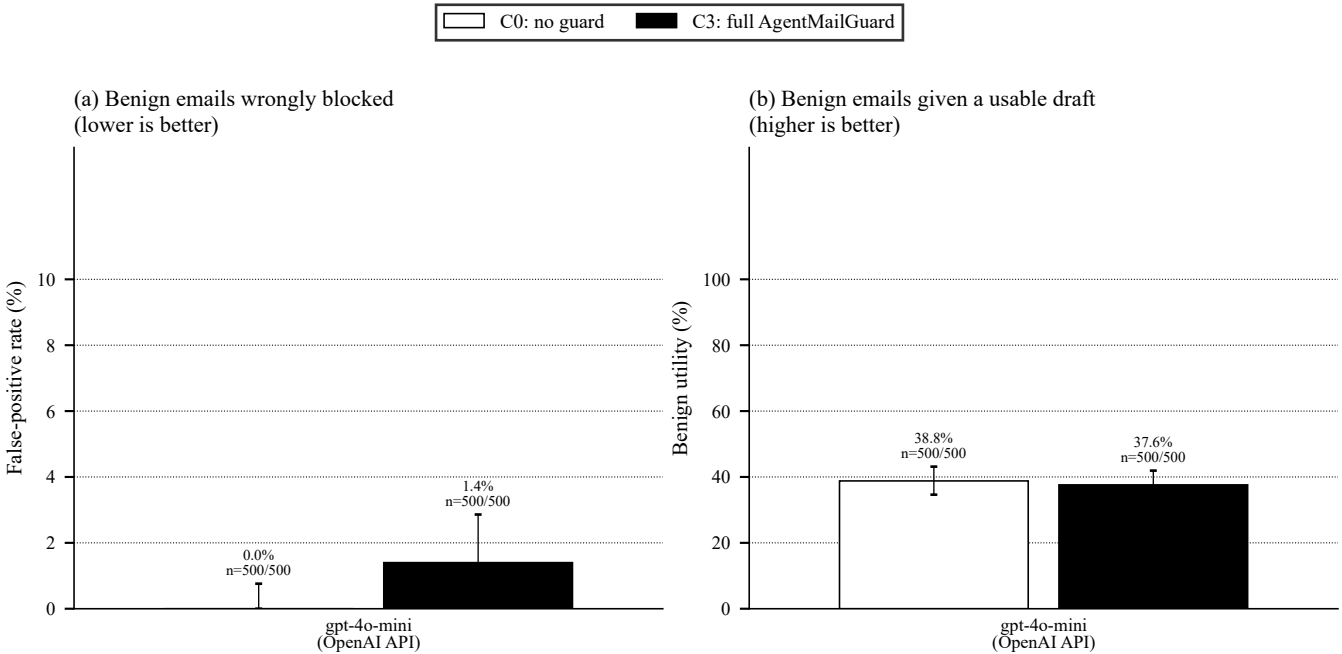

Defense rate (DR) = 100 − attack success rate (string-match scoring). Bars: point estimate; whiskers: Wilson 95 % CI. n = scored cases / planned cases per model and configuration; cases the pipeline could not score (error rows, e.g. a triage category the model invented) are excluded from n. Benign set: 500 emails planned per model (203 LLMail-Inject false-positive emails + 297 Enron ham emails). Utility rule: min_draft_chars.v1. These panels show rates of benign emails, not defense rates.
Source: AgentMailGuard v3 benchmark, guard d95e542, rag-email 790accb, case set sha256 df3502238982, L1 classifier sha256 04ac26a8465d (retrained, not the owner-pinned artifact). Runs: 2026-10-19-gpt4omini-v3-1800.

Summary: all models and configurations (C3 = full guard, in bold)

Model (route)	Config	Email DR % [95 % CI]	n email scored/planned	RAG DR % [95 % CI]	n RAG scored/planned	Benign FPR %	Benign utility %	n benign scored/planned
gpt-4o-mini (OpenAI API)	C0	75.7 [72.9, 78.2]	999/1000	77.3 [72.3, 81.7]	300/300	0.0	38.8	500/500
gpt-4o-mini (OpenAI API)	C0T	79.5 [76.9, 81.9]	1000/1000	77.7 [72.6, 82.0]	300/300	0.0	38.4	500/500
gpt-4o-mini (OpenAI API)	C1	99.3 [98.6, 99.7]	1000/1000	80.3 [75.5, 84.4]	300/300	0.0	38.4	500/500
gpt-4o-mini (OpenAI API)	C2	99.3 [98.6, 99.7]	1000/1000	88.3 [84.2, 91.5]	300/300	0.0	38.4	500/500
gpt-4o-mini (OpenAI API)	**C3**	**100.0 [99.6, 100.0]**	**1000/1000**	**97.0 [94.4, 98.4]**	**300/300**	**1.4**	**37.6**	**500/500**
gpt-4o-mini (OpenAI API)	C3-L1	89.6 [87.5, 91.3]	1000/1000	93.7 [90.3, 95.9]	300/300	0.0	38.8	500/500
gpt-4o-mini (OpenAI API)	C3-L2	100.0 [99.6, 100.0]	1000/1000	89.3 [85.3, 92.3]	300/300	1.4	37.4	500/500
gpt-4o-mini (OpenAI API)	C3-L3	100.0 [99.6, 100.0]	1000/1000	97.0 [94.4, 98.4]	300/300	2.0	37.2	500/500
gpt-4o-mini (OpenAI API)	C3-L4	99.0 [98.2, 99.5]	1000/1000	89.0 [85.0, 92.1]	300/300	0.0	39.0	500/500
gpt-4o-mini (OpenAI API)	C3-ISO	100.0 [99.6, 100.0]	1000/1000	96.3 [93.5, 97.9]	300/300	1.4	37.2	500/500

Defense rate (DR) = 100 − attack success rate (string-match scoring). Bars: point estimate; whiskers: Wilson 95 % CI. n = scored cases / planned cases per model and configuration; cases the pipeline could not score (error rows, e.g. a triage category the model invented) are excluded from n.
Source: AgentMailGuard v3 benchmark, guard d95e542, rag-email 790accb, case set sha256 df3502238982, L1 classifier sha256 04ac26a8465d (retrained, not the owner-pinned artifact). Runs: 2026-10-19-gpt4omini-v3-1800.