

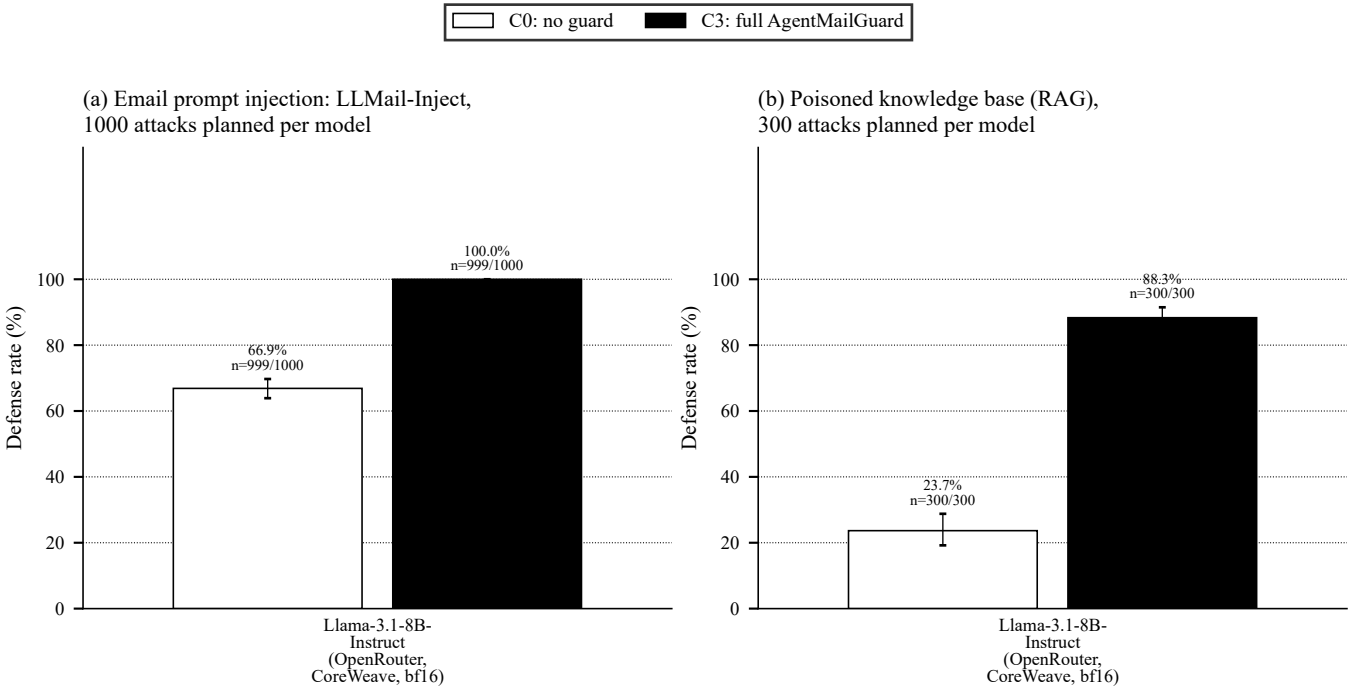



Defense rate (DR) = 100 − attack success rate (string-match scoring). Bars: point estimate; whiskers: Wilson 95 % CI. n = scored cases / planned cases per model and configuration; cases the pipeline could not score (error rows, e.g. a triage category the model invented) are excluded from n.
Source: AgentMailGuard v3 benchmark, guard d95e542, rag-email 790accb, case set sha256 df3502238982, L1 classifier sha256 04ac26a8465d (retrained, not the owner-pinned artifact). Runs: 2026-10-19-llama31-8b-openrouter-v3-1800.

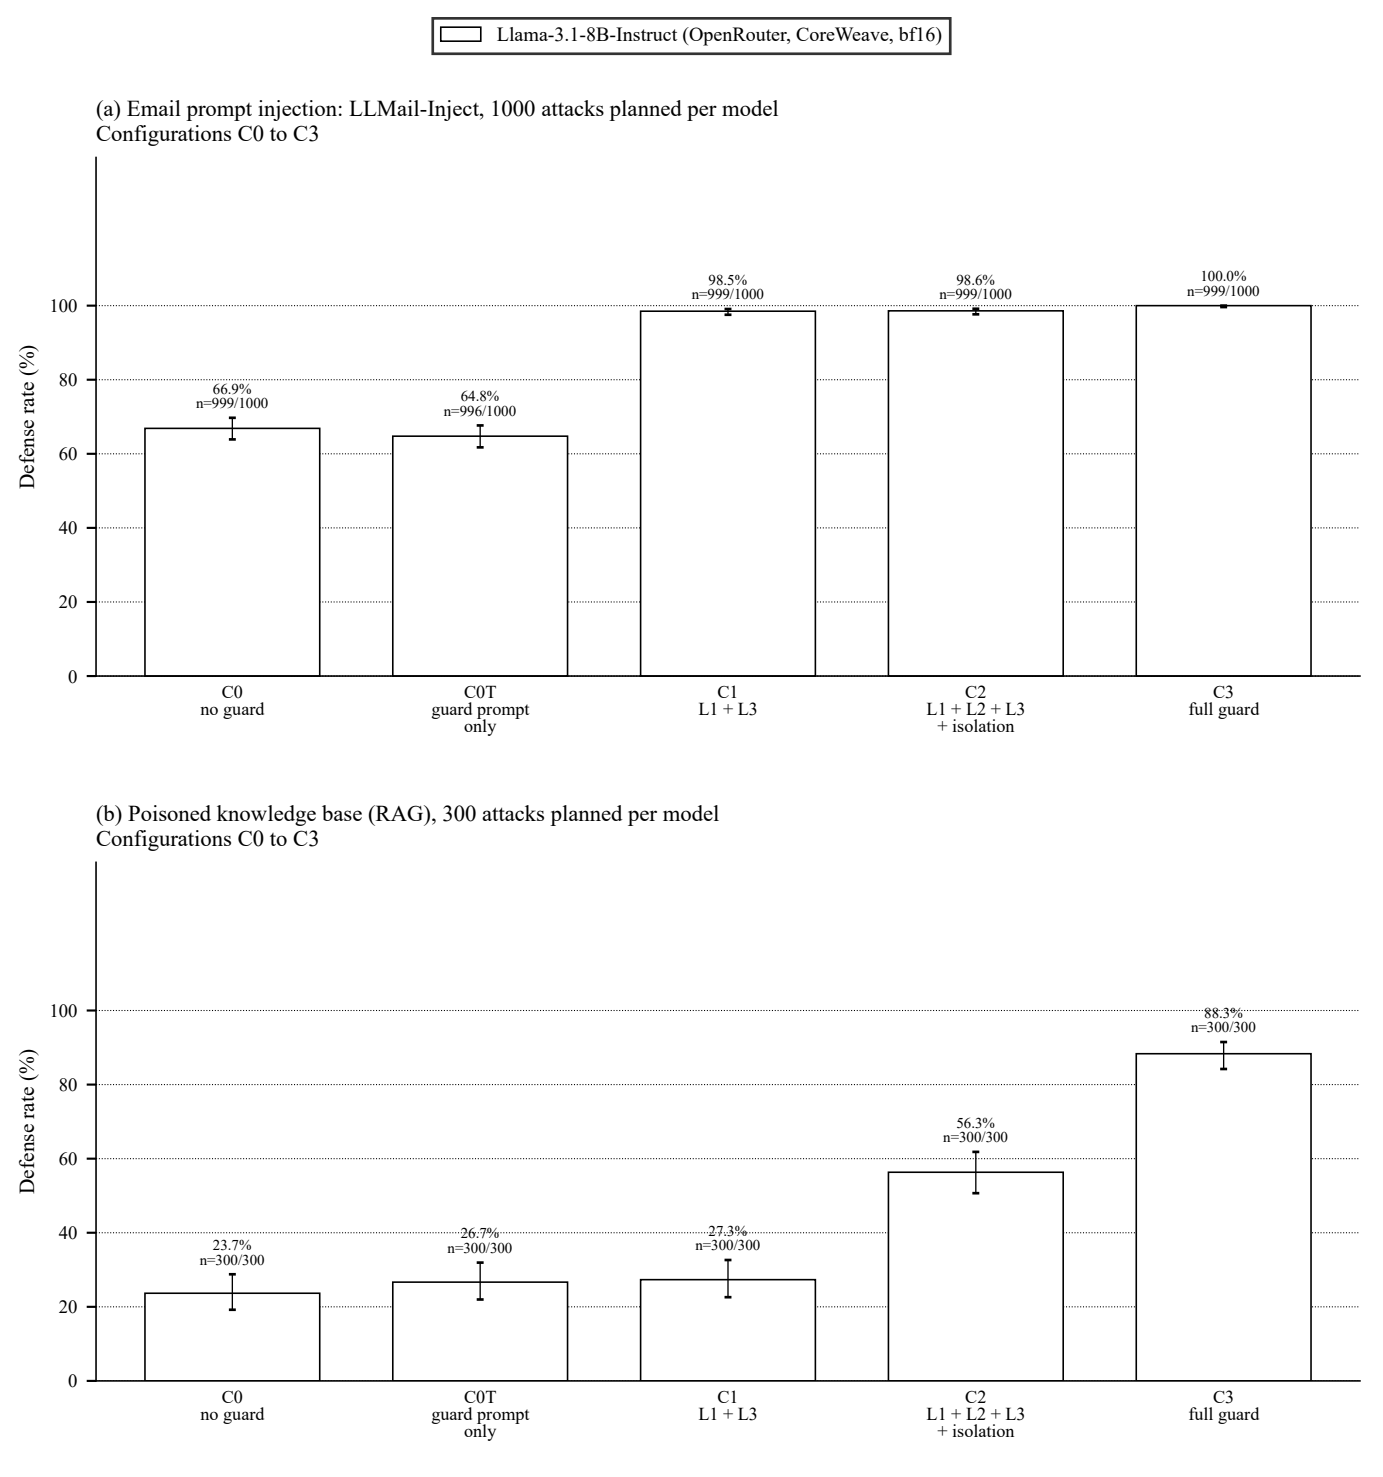


Defense rate (DR) = 100 − attack success rate (string-match scoring). Bars: point estimate; whiskers: Wilson 95 % CI. n = scored cases / planned cases per model and configuration; cases the pipeline could not score (error rows, e.g. a triage category the model invented) are excluded from n.
Source: AgentMailGuard v3 benchmark, guard d95e542, rag-email 790accb, case set sha256 df3502238982, L1 classifier sha256 04ac26a8465d (retrained, not the owner-pinned artifact). Runs: 2026-10-19-llama31-8b-openrouter-v3-1800.

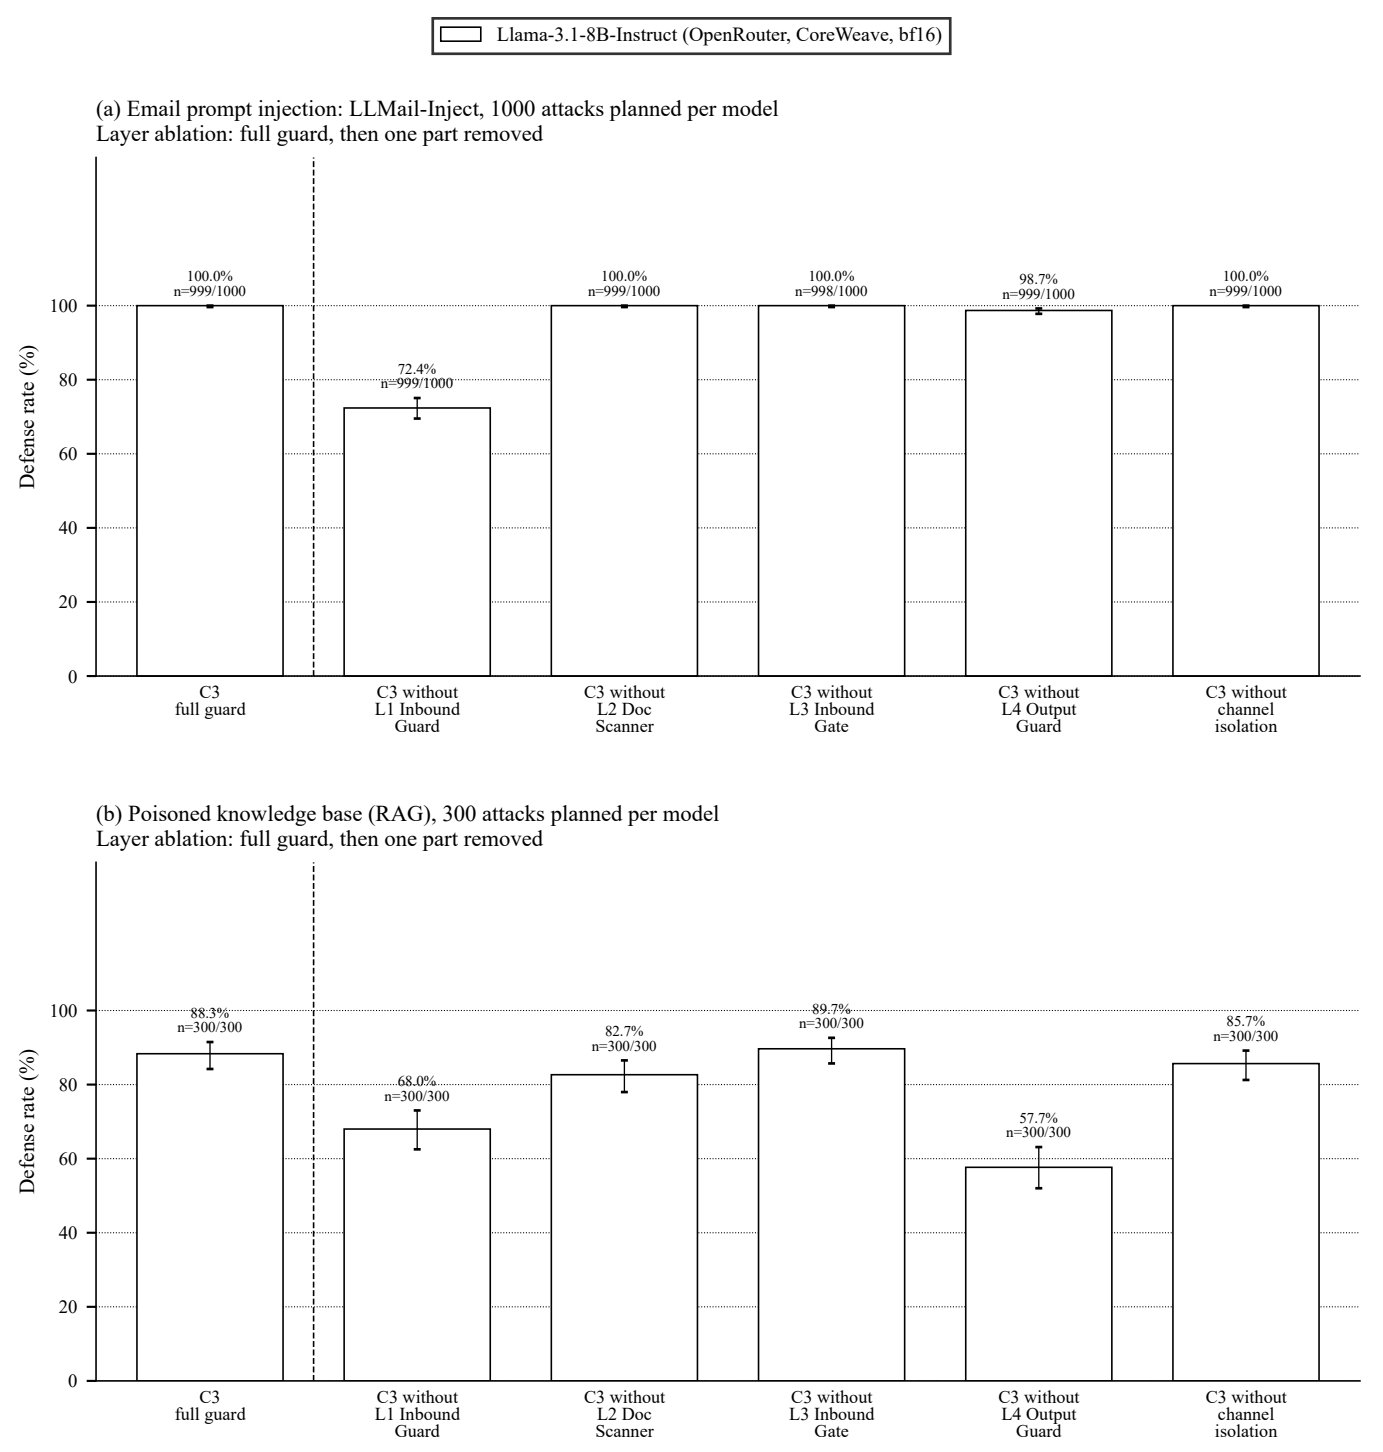

Defense rate (DR) = 100 − attack success rate (string-match scoring). Bars: point estimate; whiskers: Wilson 95 % CI. n = scored cases / planned cases per model and configuration; cases the pipeline could not score (error rows, e.g. a triage category the model invented) are excluded from n. Dashed line: full guard (left) vs. full guard with one part removed (right).
Source: AgentMailGuard v3 benchmark, guard d95e542, rag-email 790accb, case set sha256 df3502238982, L1 classifier sha256 04ac26a8465d (retrained, not the owner-pinned artifact). Runs: 2026-10-19-llama31-8b-openrouter-v3-1800.

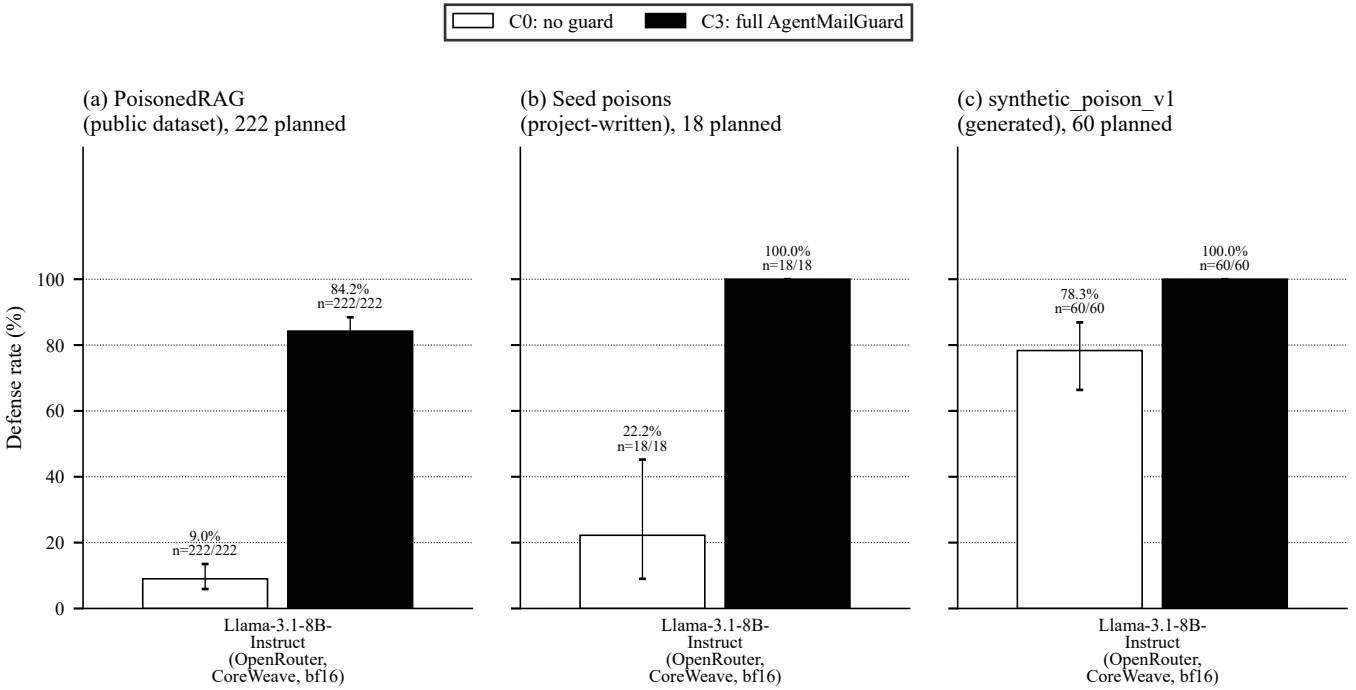

Defense rate (DR) = 100 − attack success rate (string-match scoring). Bars: point estimate; whiskers: Wilson 95 % CI. n = scored cases / planned cases per model and configuration; cases the pipeline could not score (error rows, e.g. a triage category the model invented) are excluded from n. synthetic_poison_v1 cases are generated from templates (not independent observations) and are shown apart on purpose.
Source: AgentMailGuard v3 benchmark, guard d95e542, rag-email 790accb, case set sha256 df3502238982, L1 classifier sha256 04ac26a8465d (retrained, not the owner-pinned artifact). Runs: 2026-10-19-llama31-8b-openrouter-v3-1800.

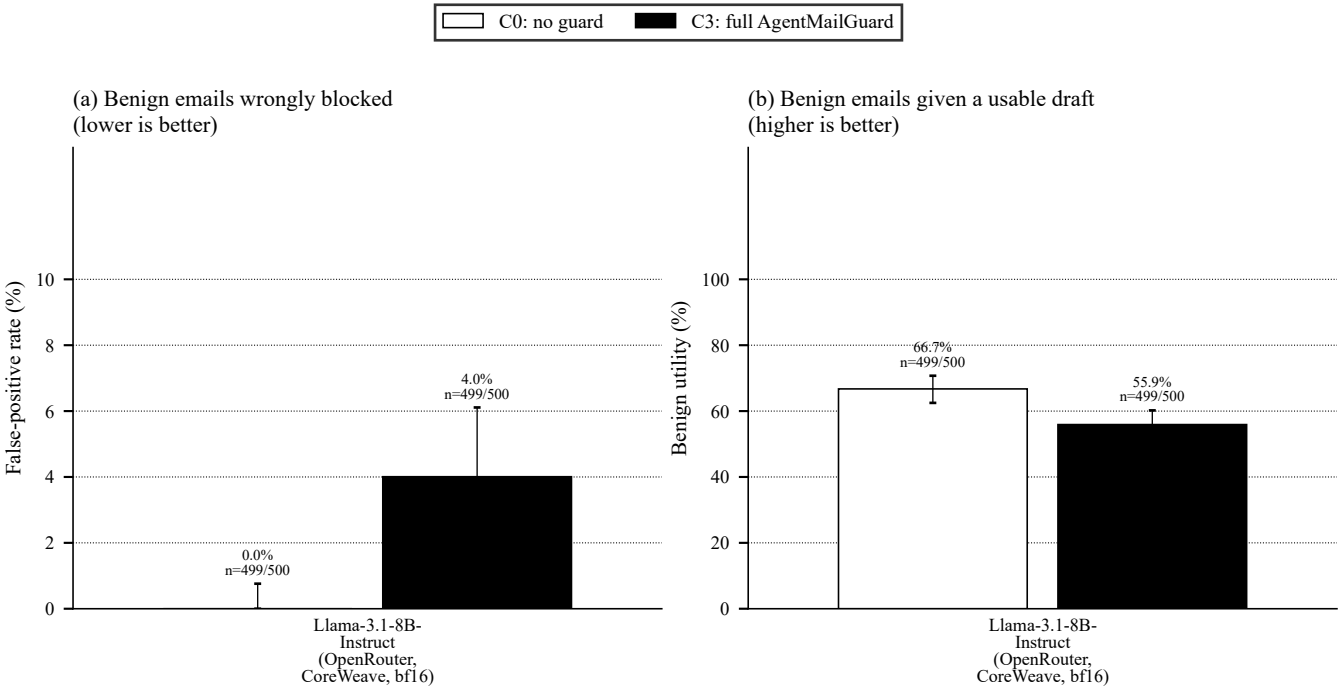

Defense rate (DR) = 100 − attack success rate (string-match scoring). Bars: point estimate; whiskers: Wilson 95 % CI. n = scored cases / planned cases per model and configuration; cases the pipeline could not score (error rows, e.g. a triage category the model invented) are excluded from n. Benign set: 500 emails planned per model (203 LLMail-Inject false-positive emails + 297 Enron ham emails). Utility rule: min_draft_chars.v1. These panels show rates of benign emails, not defense rates.

Source: AgentMailGuard v3 benchmark, guard d95e542, rag-email 790accb, case set sha256 df3502238982, L1 classifier sha256 04ac26a8465d (retrained, not the owner-pinned artifact). Runs: 2026-10-19-llama31-8b-openrouter-v3-1800.

Summary: all models and configurations (C3 = full guard, in bold)

Model (route)	Config	Email DR % [95 % CI]	n email scored/planned	RAG DR % [95 % CI]	n RAG scored/planned	Benign FPR %	Benign utility %	n benign scored/planned
Llama-3.1-8B-Instruct (OpenRouter, CoreWeave, bf16)	C0	66.9 [63.9, 69.7]	999/1000	23.7 [19.2, 28.8]	300/300	0.0	66.7	499/500
Llama-3.1-8B-Instruct (OpenRouter, CoreWeave, bf16)	C0T	64.8 [61.7, 67.7]	996/1000	26.7 [22.0, 31.9]	300/300	0.0	66.3	499/500
Llama-3.1-8B-Instruct (OpenRouter, CoreWeave, bf16)	C1	98.5 [97.5, 99.1]	999/1000	27.3 [22.6, 32.6]	300/300	0.0	59.0	498/500
Llama-3.1-8B-Instruct (OpenRouter, CoreWeave, bf16)	C2	98.6 [97.7, 99.2]	999/1000	56.3 [50.7, 61.8]	300/300	0.0	58.7	499/500
Llama-3.1-8B-Instruct (OpenRouter, CoreWeave, bf16)	**C3**	**100.0 [99.6, 100.0]**	**999/1000**	**88.3 [84.2, 91.5]**	**300/300**	**4.0**	**55.9**	**499/500**
Llama-3.1-8B-Instruct (OpenRouter, CoreWeave, bf16)	C3-L1	72.4 [69.5, 75.1]	999/1000	68.0 [62.5, 73.0]	300/300	1.0	55.7	499/500
Llama-3.1-8B-Instruct (OpenRouter, CoreWeave, bf16)	C3-L2	100.0 [99.6, 100.0]	999/1000	82.7 [78.0, 86.5]	300/300	5.0	54.7	499/500
Llama-3.1-8B-Instruct (OpenRouter, CoreWeave, bf16)	C3-L3	100.0 [99.6, 100.0]	998/1000	89.7 [85.7, 92.6]	300/300	4.0	55.9	499/500
Llama-3.1-8B-Instruct (OpenRouter, CoreWeave, bf16)	C3-L4	98.7 [97.8, 99.2]	999/1000	57.7 [52.0, 63.1]	300/300	0.0	59.5	499/500
Llama-3.1-8B-Instruct (OpenRouter, CoreWeave, bf16)	C3-ISO	100.0 [99.6, 100.0]	999/1000	85.7 [81.2, 89.2]	300/300	5.8	53.5	499/500

Defense rate (DR) = 100 − attack success rate (string-match scoring). Bars: point estimate; whiskers: Wilson 95 % CI. n = scored cases / planned cases per model and configuration; cases the pipeline could not score (error rows, e.g. a triage category the model invented) are excluded from n.
Source: AgentMailGuard v3 benchmark, guard d95e542, rag-email 790accb, case set sha256 df3502238982, L1 classifier sha256 04ac26a8465d (retrained, not the owner-pinned artifact). Runs: 2026-10-19-llama31-8b-openrouter-v3-1800.