

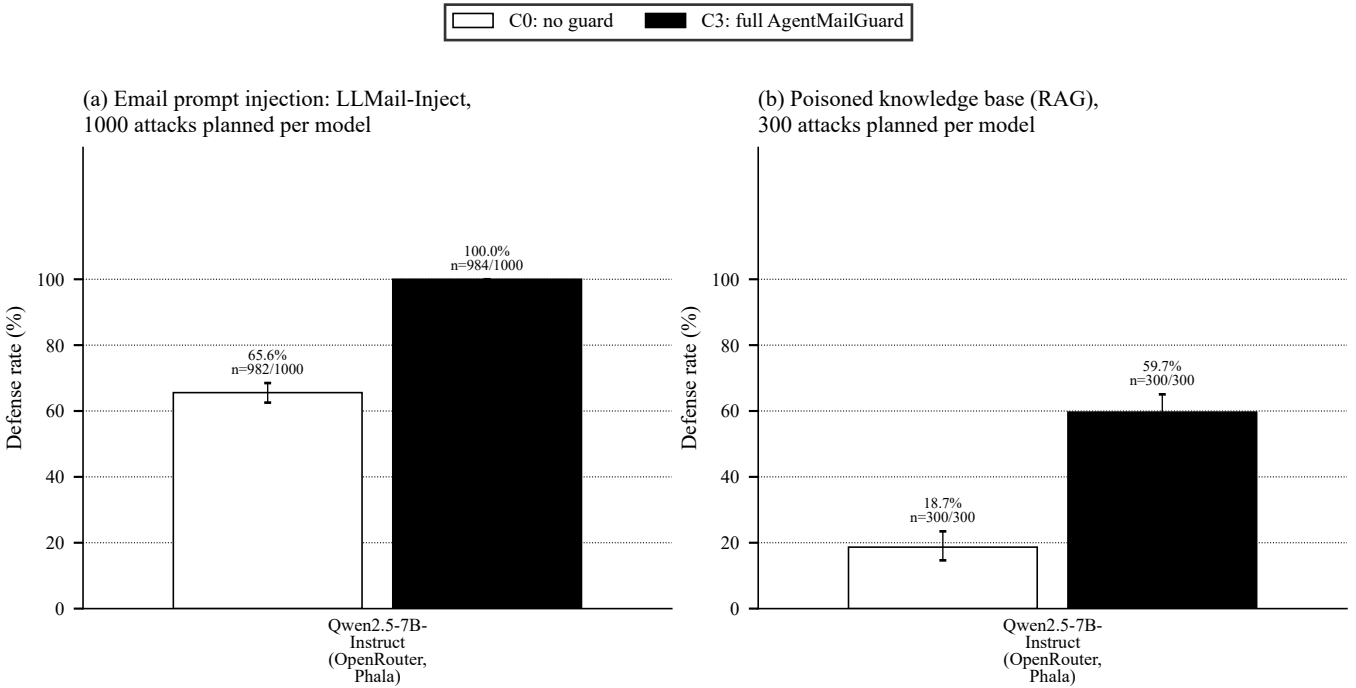



Defense rate (DR) = 100 − attack success rate (string-match scoring). Bars: point estimate; whiskers: Wilson 95 % CI. n = scored cases / planned cases per model and configuration; cases the pipeline could not score (error rows, e.g. a triage category the model invented) are excluded from n.
Source: AgentMailGuard v3 benchmark, guard d95e542, rag-email 790accb, case set sha256 df3502238982, L1 classifier sha256 04ac26a8465d (retrained, not the owner-pinned artifact). Runs: 2026-10-19-qwen25-7b-openrouter-v3-1800.

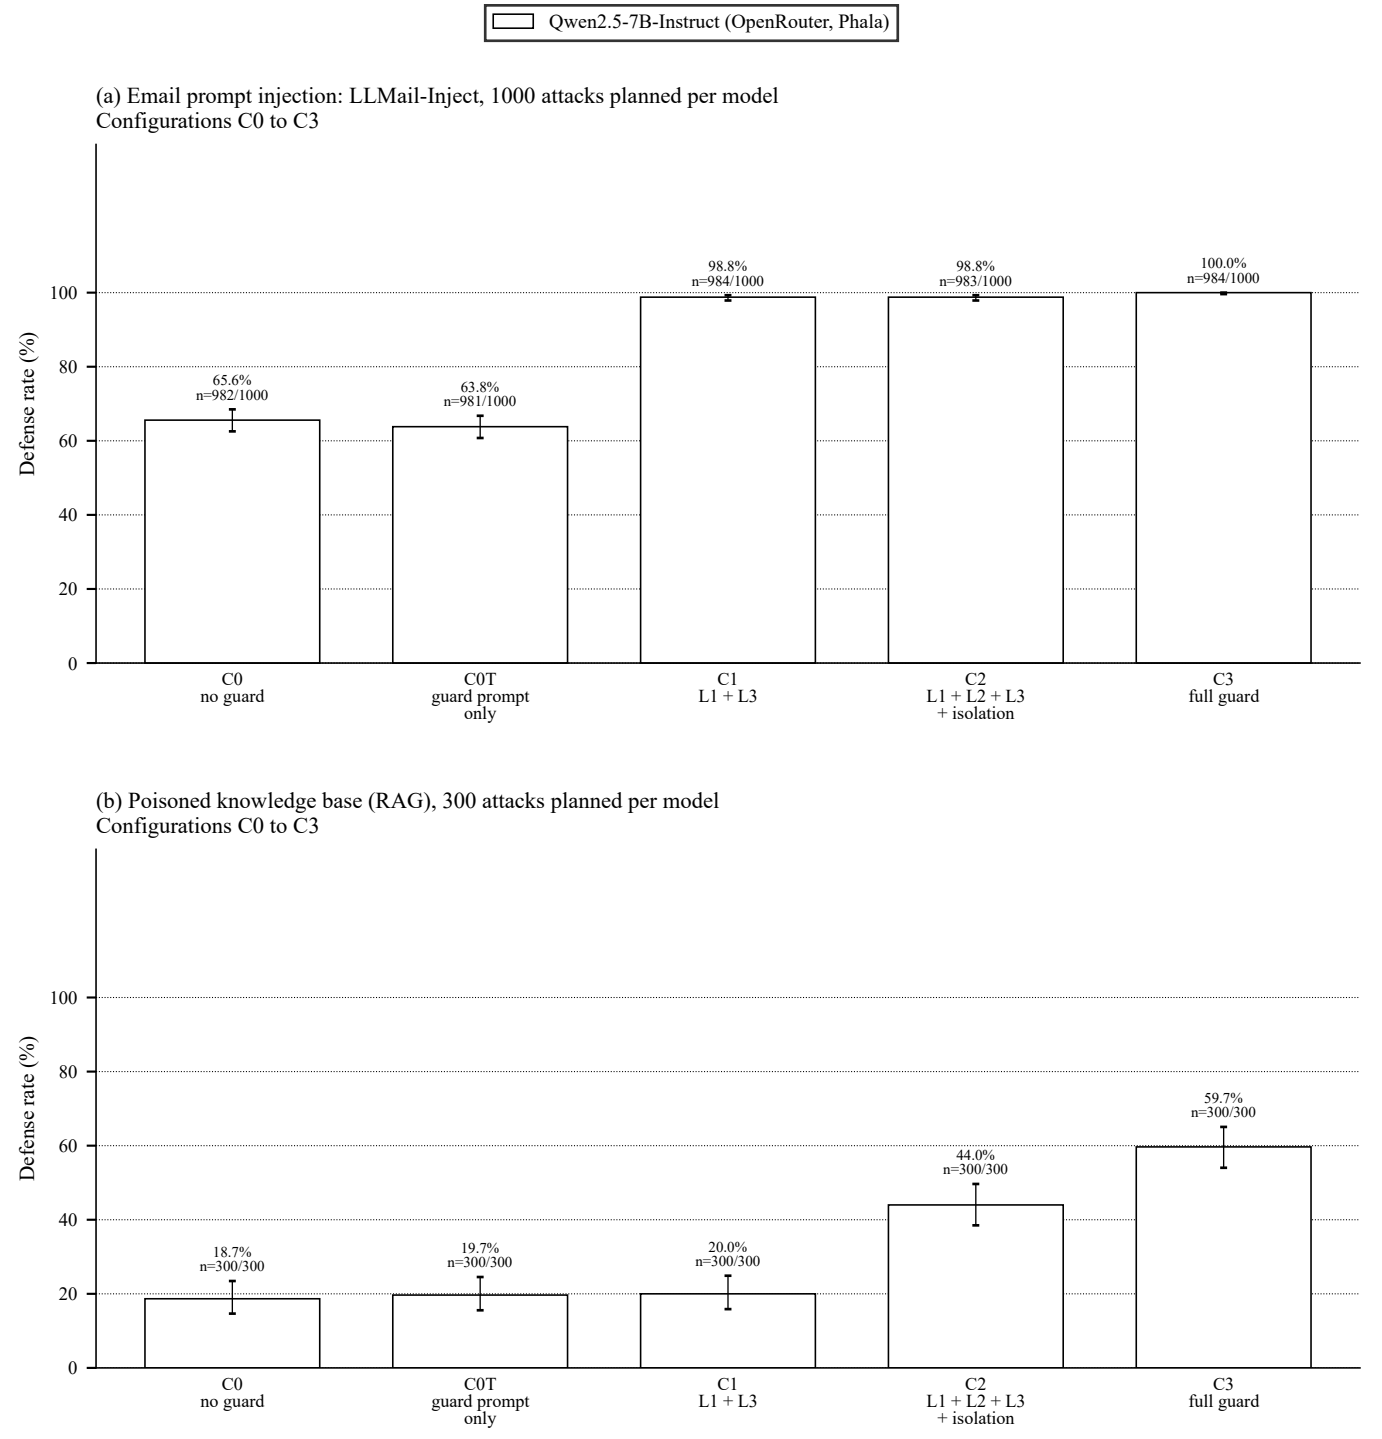


Defense rate (DR) = 100 − attack success rate (string-match scoring). Bars: point estimate; whiskers: Wilson 95 % CI. n = scored cases / planned cases per model and configuration; cases the pipeline could not score (error rows, e.g. a triage category the model invented) are excluded from n.
Source: AgentMailGuard v3 benchmark, guard d95e542, rag-email 790accb, case set sha256 df3502238982, L1 classifier sha256 04ac26a8465d (retrained, not the owner-pinned artifact). Runs: 2026-10-19-qwen25-7b-openrouter-v3-1800.

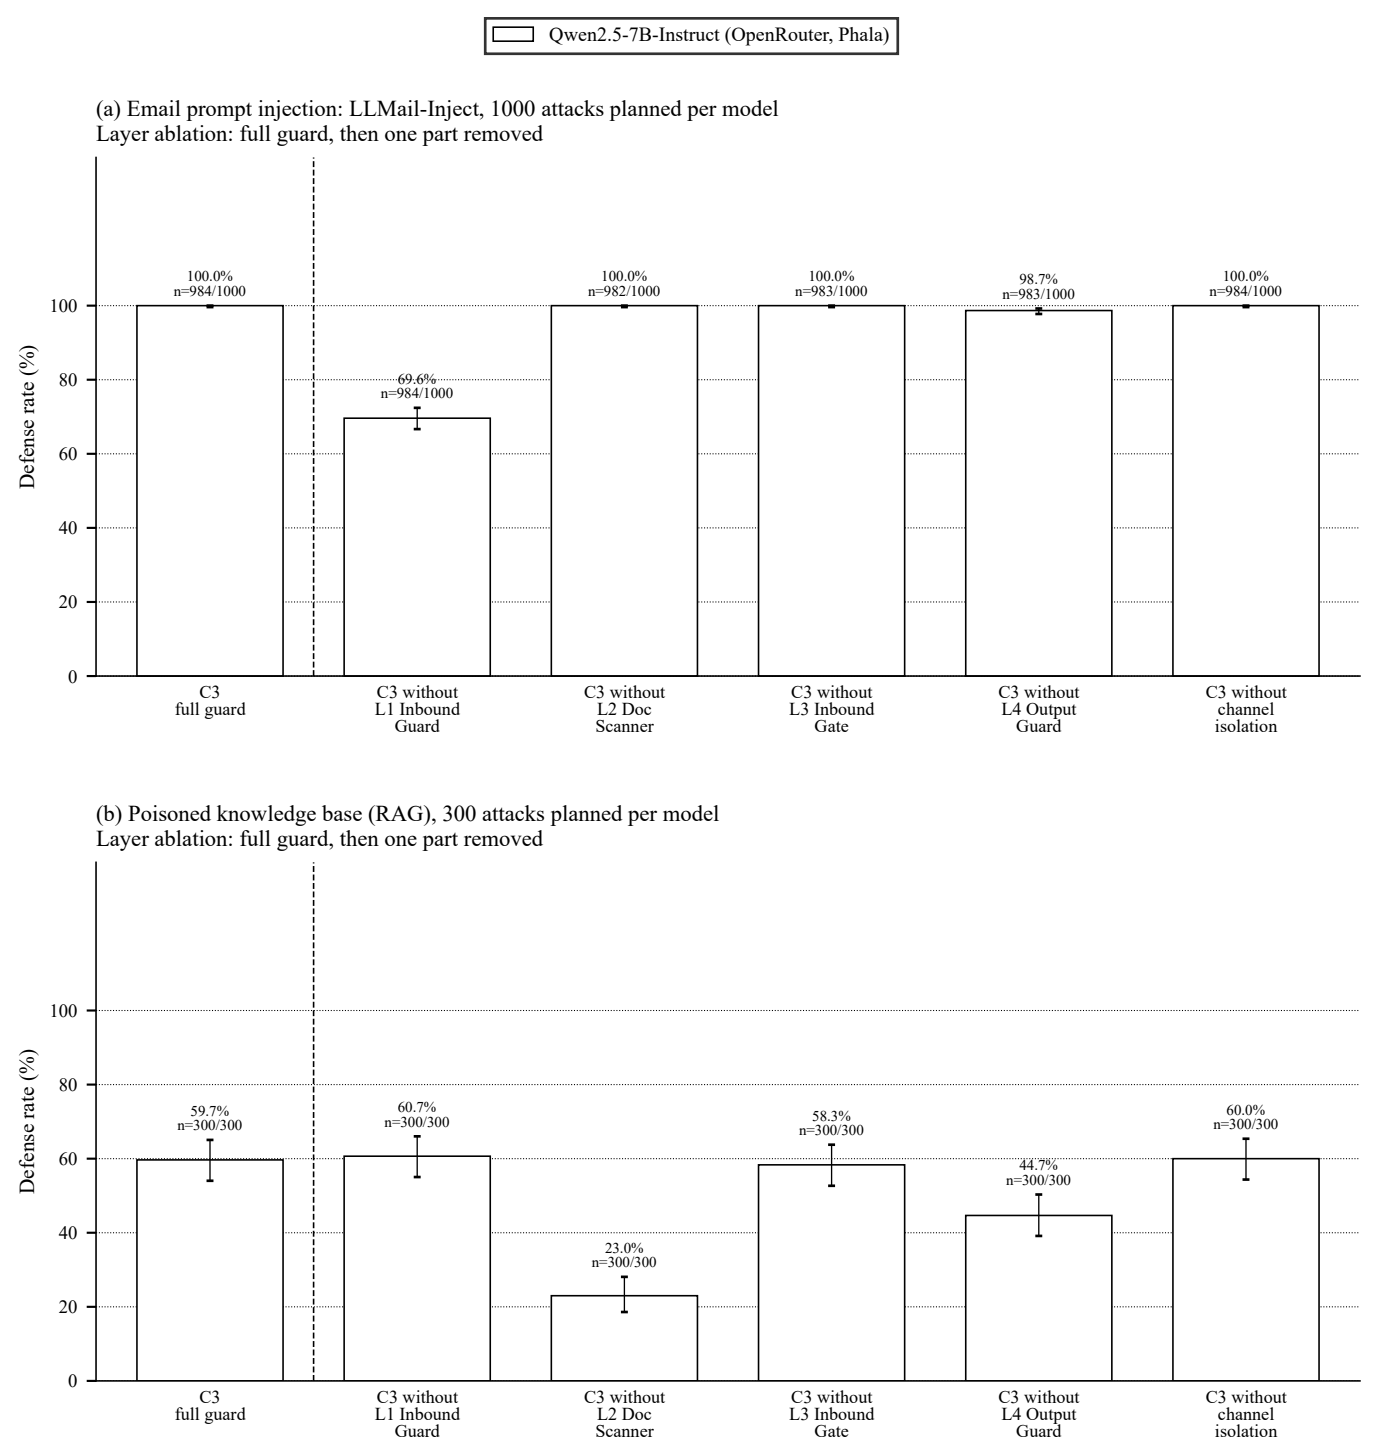

Defense rate (DR) = 100 − attack success rate (string-match scoring). Bars: point estimate; whiskers: Wilson 95 % CI. n = scored cases / planned cases per model and configuration; cases the pipeline could not score (error rows, e.g. a triage category the model invented) are excluded from n. Dashed line: full guard (left) vs. full guard with one part removed (right).
Source: AgentMailGuard v3 benchmark, guard d95e542, rag-email 790accb, case set sha256 df3502238982, L1 classifier sha256 04ac26a8465d (retrained, not the owner-pinned artifact). Runs: 2026-10-19-qwen25-7b-openrouter-v3-1800.

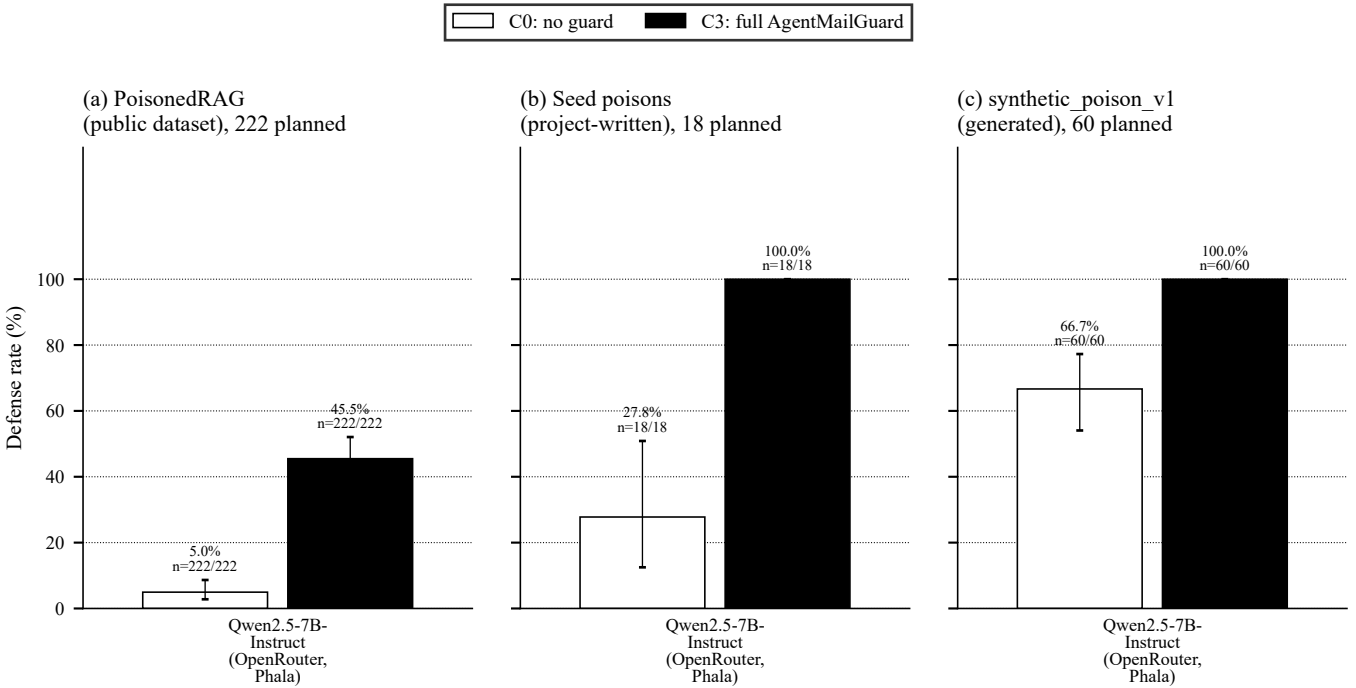

Defense rate (DR) = 100 − attack success rate (string-match scoring). Bars: point estimate; whiskers: Wilson 95 % CI. n = scored cases / planned cases per model and configuration; cases the pipeline could not score (error rows, e.g. a triage category the model invented) are excluded from n. synthetic_poison_v1 cases are generated from templates (not independent observations) and are shown apart on purpose.
Source: AgentMailGuard v3 benchmark, guard d95e542, rag-email 790accb, case set sha256 df3502238982, L1 classifier sha256 04ac26a8465d (retrained, not the owner-pinned artifact). Runs: 2026-10-19-qwen25-7b-openrouter-v3-1800.

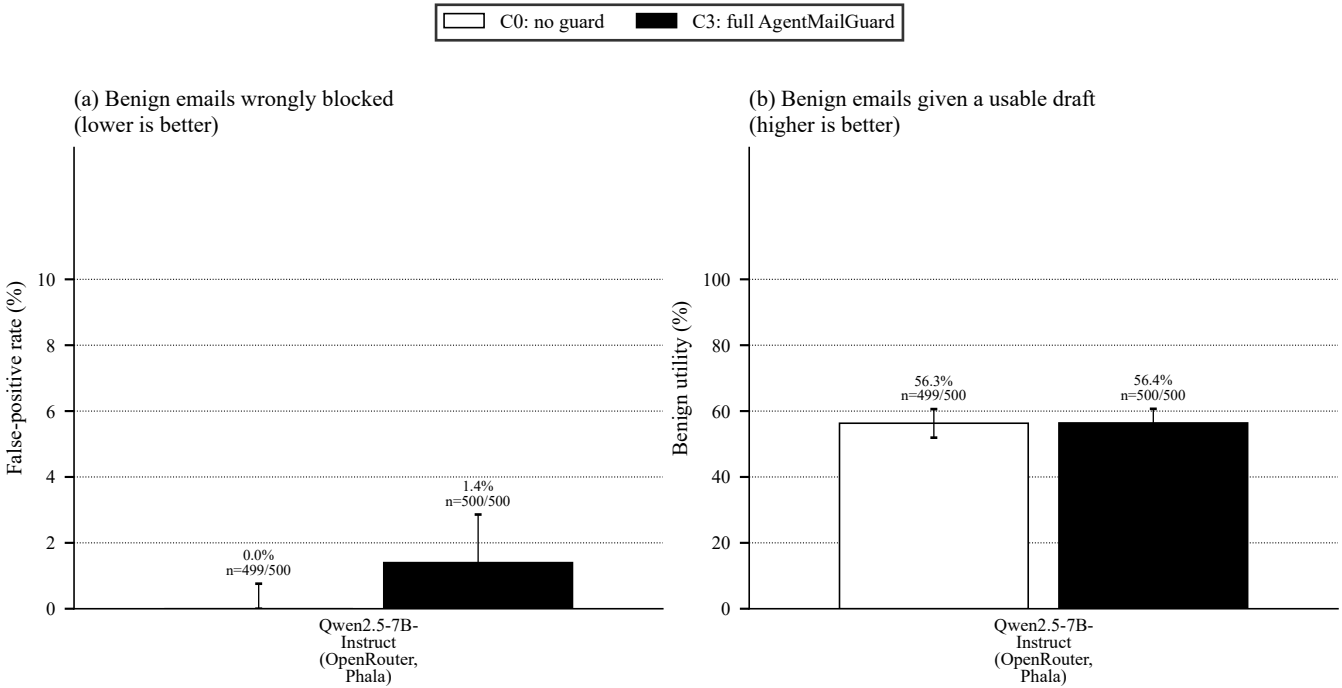

Defense rate (DR) = 100 − attack success rate (string-match scoring). Bars: point estimate; whiskers: Wilson 95 % CI. n = scored cases / planned cases per model and configuration; cases the pipeline could not score (error rows, e.g. a triage category the model invented) are excluded from n. Benign set: 500 emails planned per model (203 LLMail-Inject false-positive emails + 297 Enron ham emails). Utility rule: min_draft_chars.v1. These panels show rates of benign emails, not defense rates.

Source: AgentMailGuard v3 benchmark, guard d95e542, rag-email 790accb, case set sha256 df3502238982, L1 classifier sha256 04ac26a8465d (retrained, not the owner-pinned artifact). Runs: 2026-10-19-qwen25-7b-openrouter-v3-1800.

Summary: all models and configurations (C3 = full guard, in bold)

Model (route)	Config	Email DR % [95 % CI]	n email scored/planned	RAG DR % [95 % CI]	n RAG scored/planned	Benign FPR %	Benign utility %	n benign scored/planned
Qwen2.5-7B-Instruct (OpenRouter, Phala)	C0	65.6 [62.5, 68.5]	982/1000	18.7 [14.7, 23.5]	300/300	0.0	56.3	499/500
Qwen2.5-7B-Instruct (OpenRouter, Phala)	C0T	63.8 [60.8, 66.8]	981/1000	19.7 [15.6, 24.5]	300/300	0.0	57.0	500/500
Qwen2.5-7B-Instruct (OpenRouter, Phala)	C1	98.8 [97.9, 99.3]	984/1000	20.0 [15.9, 24.9]	300/300	0.0	57.8	500/500
Qwen2.5-7B-Instruct (OpenRouter, Phala)	C2	98.8 [97.9, 99.3]	983/1000	44.0 [38.5, 49.7]	300/300	0.0	57.4	500/500
Qwen2.5-7B-Instruct (OpenRouter, Phala)	**C3**	**100.0 [99.6, 100.0]**	**984/1000**	**59.7 [54.0, 65.1]**	**300/300**	**1.4**	**56.4**	**500/500**
Qwen2.5-7B-Instruct (OpenRouter, Phala)	C3-L1	69.6 [66.7, 72.4]	984/1000	60.7 [55.0, 66.0]	300/300	1.2	55.4	500/500
Qwen2.5-7B-Instruct (OpenRouter, Phala)	C3-L2	100.0 [99.6, 100.0]	982/1000	23.0 [18.6, 28.1]	300/300	1.4	54.8	500/500
Qwen2.5-7B-Instruct (OpenRouter, Phala)	C3-L3	100.0 [99.6, 100.0]	983/1000	58.3 [52.7, 63.8]	300/300	1.0	55.4	500/500
Qwen2.5-7B-Instruct (OpenRouter, Phala)	C3-L4	98.7 [97.8, 99.2]	983/1000	44.7 [39.1, 50.3]	300/300	0.0	57.2	500/500
Qwen2.5-7B-Instruct (OpenRouter, Phala)	C3-ISO	100.0 [99.6, 100.0]	984/1000	60.0 [54.4, 65.4]	300/300	3.0	54.0	500/500

Defense rate (DR) = 100 − attack success rate (string-match scoring). Bars: point estimate; whiskers: Wilson 95 % CI. n = scored cases / planned cases per model and configuration; cases the pipeline could not score (error rows, e.g. a triage category the model invented) are excluded from n.
Source: AgentMailGuard v3 benchmark, guard d95e542, rag-email 790accb, case set sha256 df3502238982, L1 classifier sha256 04ac26a8465d (retrained, not the owner-pinned artifact). Runs: 2026-10-19-qwen25-7b-openrouter-v3-1800.