



What's new in S/4HANA?

In detail

Who are we?



Lobna Sabri

Technical SAP consultant

Flexso Digital



Kevin De Backer

Technical SAP consultant

Flexso Digital

Why are we here?

- New possibilities with Fiori Elements
 - › Not limited anymore
- Quick way of creating a Fiori Elements application
- What's new in RAP
- What's new in ABAP




Agenda

- Demo
 - Business case
 - Environment context
 - Live showcase
- Additional updates
- Key Takeaways
- SAP roadmap
- Q&A


Business case

- Client
 - › “We are a touring company. We create bus rides on the application, those rides will be visible on the website for people to reserve a seat on”

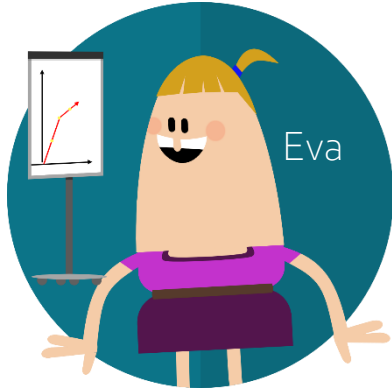


Business case requirement

- Requirements

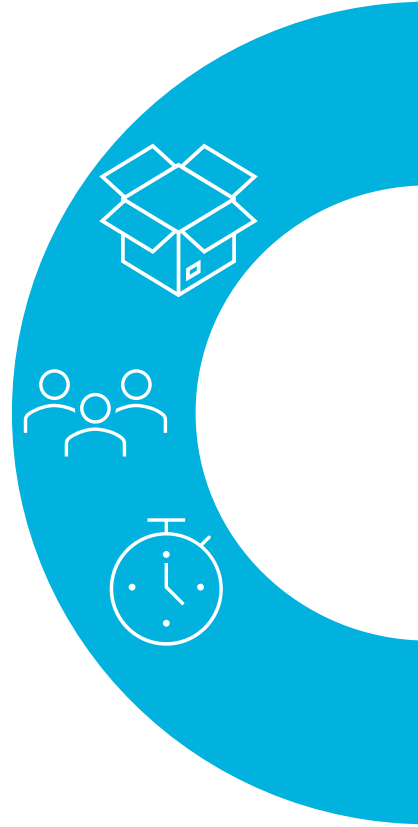

Business case requirement

- Requirements
 - › CRUD
 - Basic functionalities
 - Out of the box

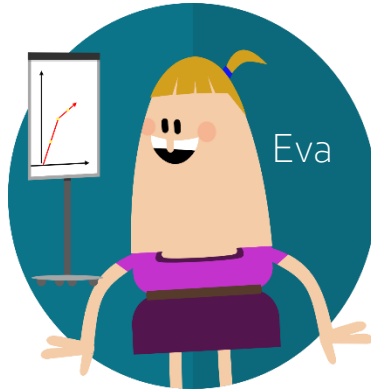

Business case requirement

- Requirements
 - › CRUD
 - › Multiple people will use this app
 - Don't let users block each other by locking objects



Business case requirement

- Requirements
 - › CRUD
 - › Multiple people will use this app
 - › Recalculate the price depending on business logic
 - Calculation should not block the user while using the app
 - Time efficiency



Environment context

- SAP Cloud ERP 2608 (SAP S/4HANA Public Cloud)
- Fiori Elements
- Generated the RAP service with ABAP development tools
- Generated the Fiori Elements application with Quick Fiori app generator with ADT



RECAP


Generating RAP service

With Eclipse ADT tools

- Pre-requisites
 - › Database table

Generating RAP service

With Eclipse ADT tools

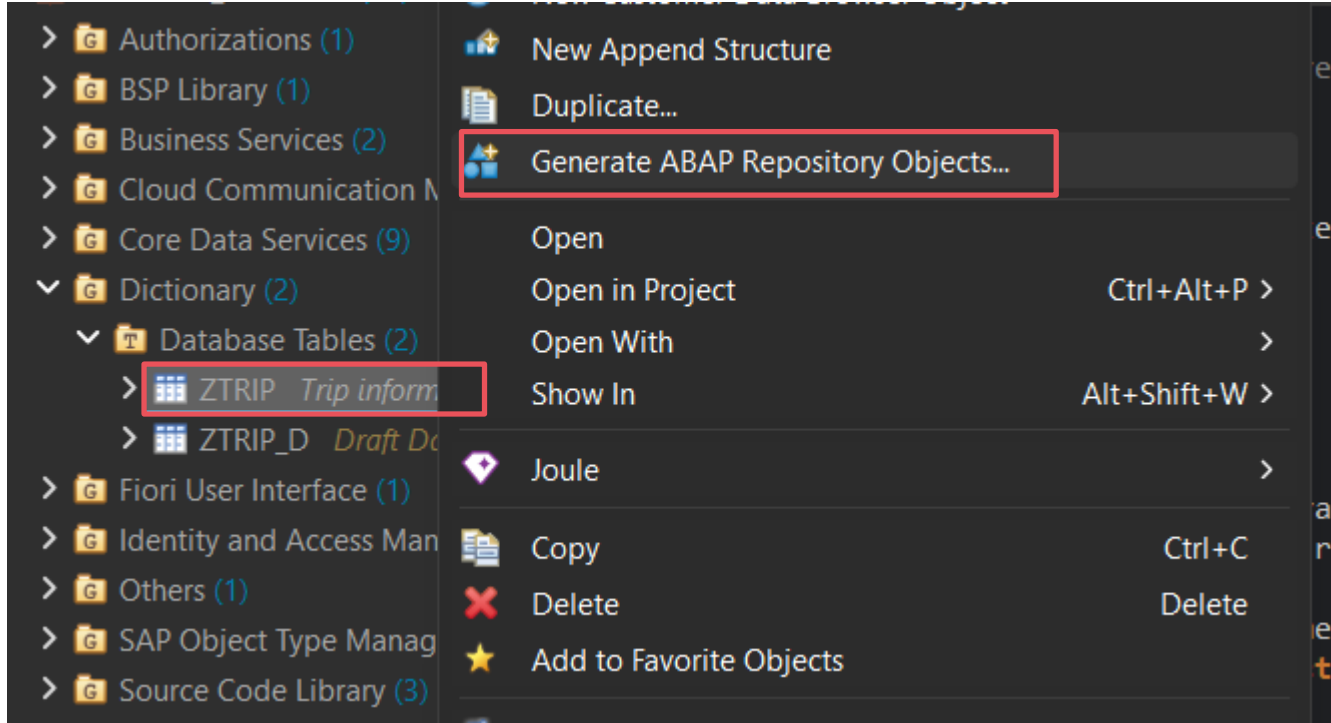

Generating RAP service

With Eclipse ADT tools

Select Generator

Generate multiple repository objects.

Project: *

XSD_EN

Browse...

Filter by:

TABL (Database Table)

type filter text

▼

ABAP RESTful Application Programming Model

OData UI Service

OData Web API Service

▼

Business Configuration Management

Business Configuration Maintenance Object

OData UI Service

This generator creates all the repository objects that are relevant for a business object and for a RAP service. The end result is a full-blown RAP UI Service. An OData UI service makes it possible to consume a RAP service with a Fiori Elements UI or other UI clients. It creates all UI-specific information that is annotated in the RAP artifacts in the OData service metadata. A UI service can be previewed with the Fiori Elements App preview in the service binding artifact. Specifically, the following

OData UI Service

Referenced Object:

ZTRIP

Browse...

?

< Back

Next >

Finish

Cancel

Generating RAP service

With Eclipse ADT tools

Configure Generator

Specify values for the generator, 'OData UI Service'.

Details for RAP artifacts generation

type filter text

- General
- Business Object
 - Data Model
 - Behavior
- Service Projection
 - Service Projection Entity
 - Service Projection Behavior
- Business Service
 - Service Definition
 - Service Binding

General

The object on which the root entity of the business object is based upon.

Referenced Object:

Project Name:

Artifacts Prefix:

Artifacts Suffix:

Generating RAP service

With Eclipse ADT tools

ABAP Artifacts Generation/Modification List			
List of repository objects that are going to be generated.			
type filter text			
Repository Object Name	ABAP Object Type	Operation	Notes
Service Artifacts			
Business Service Layer			
ZUI_D2D_TRIP001_O4	Service Definition	CREATE	
ZUI_D2D_TRIP001_O4	Service Binding	CREATE	Preview is not available, however the Ser...
SAP Object Type			
ZD2D_TRIP	SAP Object Node Type	CREATE	
ZD2D_TRIP	SAP Object Type	CREATE	
Business Object Projection Layer			
ZC_D2D_TRIP001	Data Definition	CREATE	
ZC_D2D_TRIP001	Metadata Extension	CREATE	
ZC_D2D_TRIP001	Behavior Definition	CREATE	
ZBP_C_D2D_TRIP	Class	CREATE	
ZC_D2D_TRIP001	Access Control	CREATE	
Business Object Layer			
ZR_D2D_TRIP001	Data Definition	CREATE	
ZR_D2D_TRIP001	Behavior Definition	CREATE	
ZBP_R_D2D_TRIP	Class	CREATE	
ZR_D2D_TRIP001	Access Control	CREATE	
Data Base Model Layer			
ZD2D_TRIP001_D	Database Table	CREATE	

Deploying RAP service

With Eclipse ADT tools

- Pre-requisites
 - › Published service

Deploying RAP service

With Eclipse ADT tools

 **Service Binding: ZUI_TRAVELAPP_O4**

General Information

This section describes general information about this service binding

Binding Type:

Services

Define services associated with the Service Binding

Default Authorization Values:

Local Service Endpoint:

Service Name	Version	API State	Service Definition
▼ ZUI_TRAVELAPP_O4	1.0.0	Not Released	ZUI_TRAVELAPP_O4

Service Version Details

View information on selected service version

Service Information

Service URL:


Fiori App URL:

Entity Set and Association

 Trip
--

Deploying RAP service

With Eclipse ADT tools

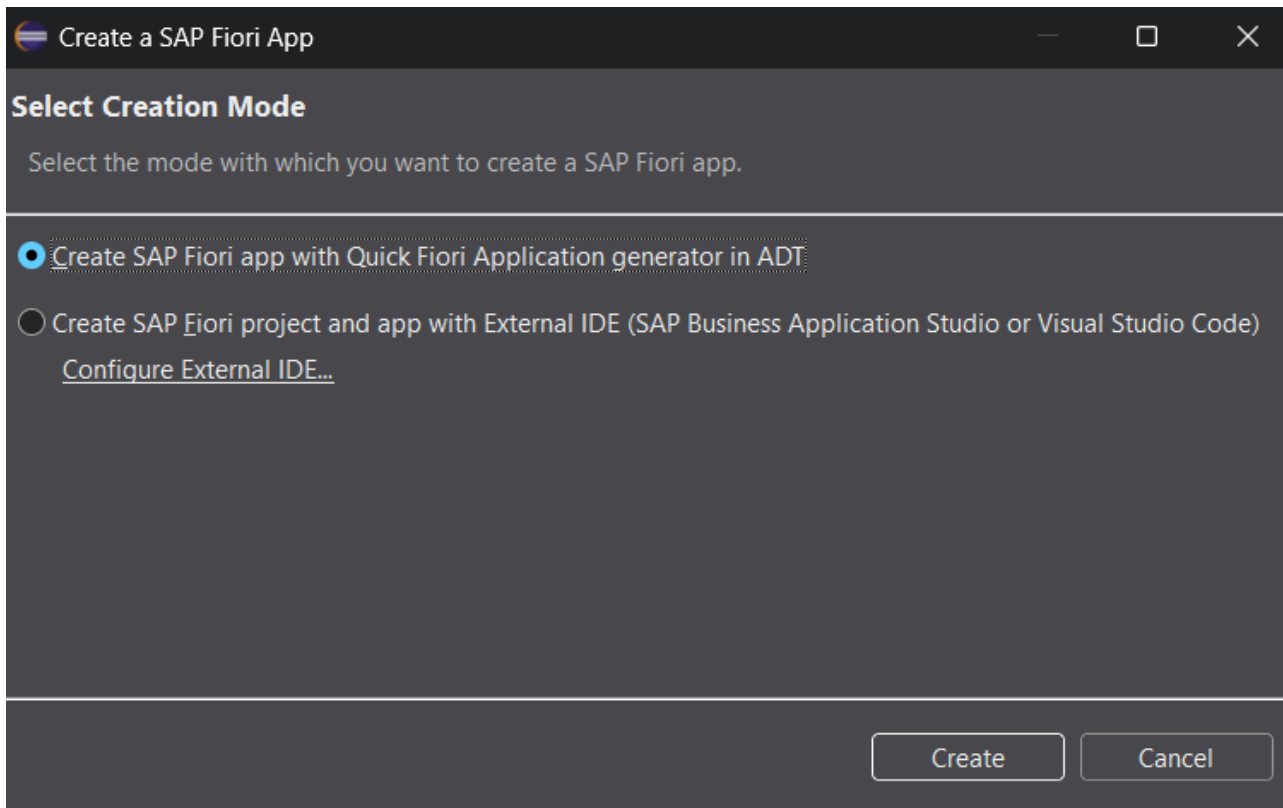

Deploying RAP service

With Eclipse ADT tools

Generate ABAP Repository Objects

Configure Generator

Enter the details required to generate the objects.

Service Binding Details
Configure the service to create an SAP Fiori App with list report page.

Service Binding:

Service Name: *

Version: *

Main Entity: *

Navigation Entity:

Project Details
App will be generated using list report template with minimum SAP UI version 1.130.5

Module Name: *

Application Title:

Deployment Details
Configure deployment settings.

Repository Name: *

Description:

Configure Fiori Launchpad settings

Semantic Object: *

Action: *

Title: *

Subtitle:



Deploying RAP service

With Eclipse ADT tools

Generate ABAP Repository Objects

ABAP Artifacts Generation/Modification List

List of repository objects that are going to be generated.

type filter text

Repository Object Name	ABAP Object Type	Operation
ZDEMO_TRIP_2	WAPA/WO	CREATE
zdemo_trips2	Launchpad App Descriptor Item	CREATE

Deploying RAP service

With Eclipse ADT tools

- Missing objects for launchpad
 - › IAM app
 - › Business Catalog

403 Forbidden


The request has been blocked by UCON.

Server time: 2026-09-11 14:42:42

Deploying RAP service

With Eclipse ADT tools

- IAM app
 - › Service
 - › Semantic object + action
 - › App ID

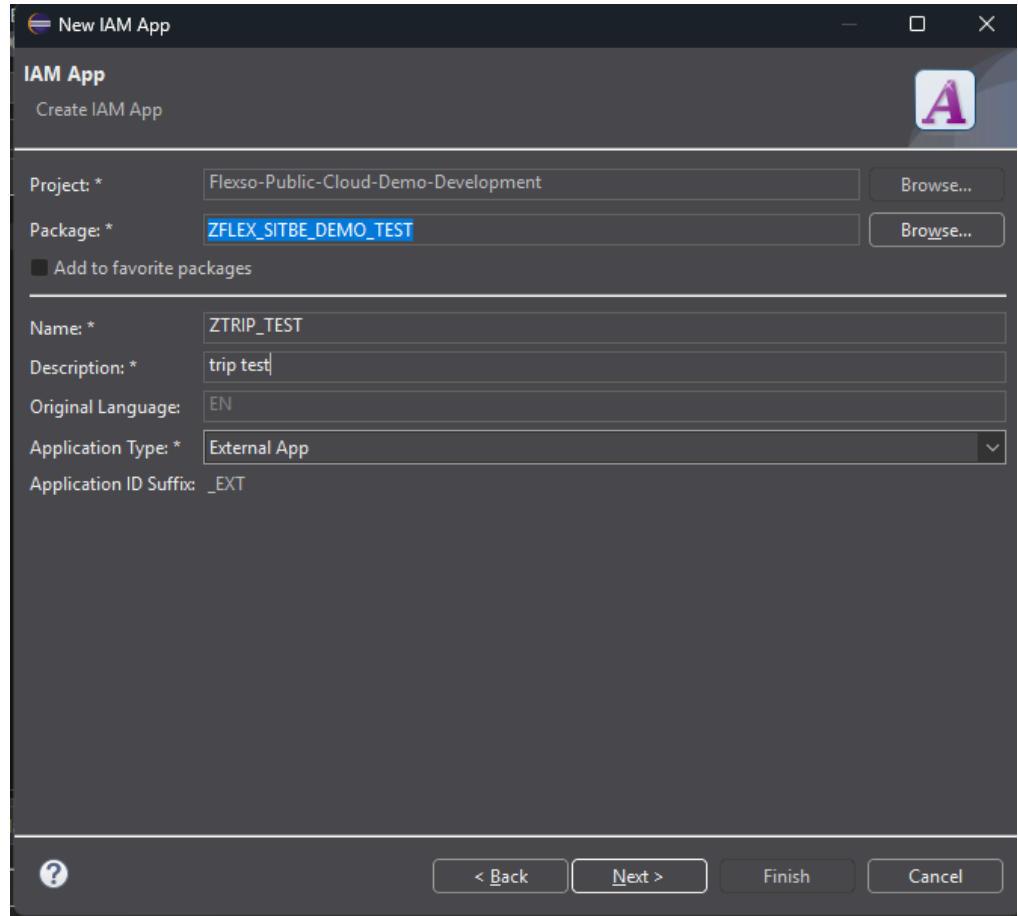

The screenshot shows the 'New IAM App' dialog box in Eclipse ADT tools. The dialog has a title bar 'New IAM App' and a subtitle 'IAM App' with a 'Create IAM App' button. The main content area contains the following fields and options:

- Project:** * Flexso-Public-Cloud-Demo-Development (with a 'Browse...' button)
- Package:** * ZFLEX_SITBE_DEMO_TEST (with a 'Browse...' button)
- ☐ Add to favorite packages
- Name:** * ZTRIP_TEST
- Description:** * trip test
- Original Language:** EN
- Application Type:** * External App (dropdown menu)
- Application ID Suffix:** _EXT

At the bottom, there is a help icon (?) and four buttons: '< Back', 'Next >', 'Finish', and 'Cancel'.

Deploying RAP service

With Eclipse ADT tools

 **IAM App: ZTRIP_TEST_EXT**

Publish Locally 

Services

  Synchronize

type filter text

Service Type	Service Name	Description
OData V4	ZUI_TRIPTEST_TEST_O4	Service Binding for ZUI_TRIPTEST_TEST_O4

Project Explorer

> D4E_800_sabrilo_en [D4E, 800, SABRILO, EN]

> F1D_100_p70099118_en [F1D, 100, P70099118, EN]

> F1D_100_p70099118_en_1 [F1D, 100, P70099118, EN]

> F1D_100_p70099118_en_2 [F1D, 100, P70099118, EN]

> F1Q_100_p70099118_en [F1Q, 100, P70099118, EN]

> Flexso-Public-Cloud-Demo-Development [H86, 080, CB9980000070, EN]

> Favorite Packages (4,064)

> ZFLEX_SITBE_DEMO (22) SITBE Demo

> Authorizations (1)

> Business Services (2)

> Cloud Communication Management (1)

> Core Data Services (9)

> Dictionary (2)

> Identity and Access Management (2)

> SAP Object Type Management (2)

> Source Code Library (3)

> ZFLEX_SITBE_DEMO_TEST (23) Test environment

> Authorizations (1)

> BSP Library (1)

> BSP Applications (1)

> ZTRVL_APP_TEST Travel app test

> Business Services (2)

> Cloud Communication Management (1)

> Core Data Services (7)

> Dictionary (1)

> Fiori User Interface (1)

> Launchpad App Descriptor Items (1)

> ZTRVL_APP_TEST_UI5R Travel app test

> Identity and Access Management (4)

> Others (1)

Release Notes

[H86] ZTRIP_TEST_EXT

[H86] ZBC_TRIP_TEST

[H86] ZBC_TRIP_TEST_0001

IAM App: ZTRIP_TEST_EXT

General

App Type: *

External App

Fiori Launchpad App Descr Item ID:

ZTRVL_APP_TEST_UI5R

Status:

Published

Restriction Type Migration Status:

Migrated

What's next?


[Create a new Business Catalog and assign the App to it](#)

[Assign the App to an existing Business Catalog](#)

Deploying RAP service

With Eclipse ADT tools


- Business Catalog
 - › Authorization
 - › Business Role

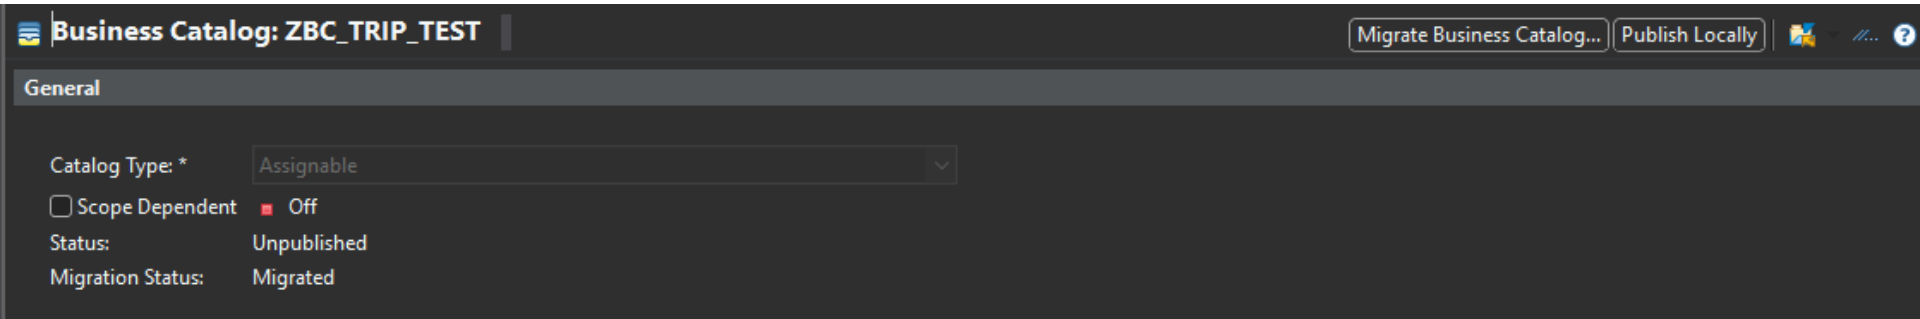

Deploying RAP service

With Eclipse ADT tools

- Link IAM app to Business Catalog

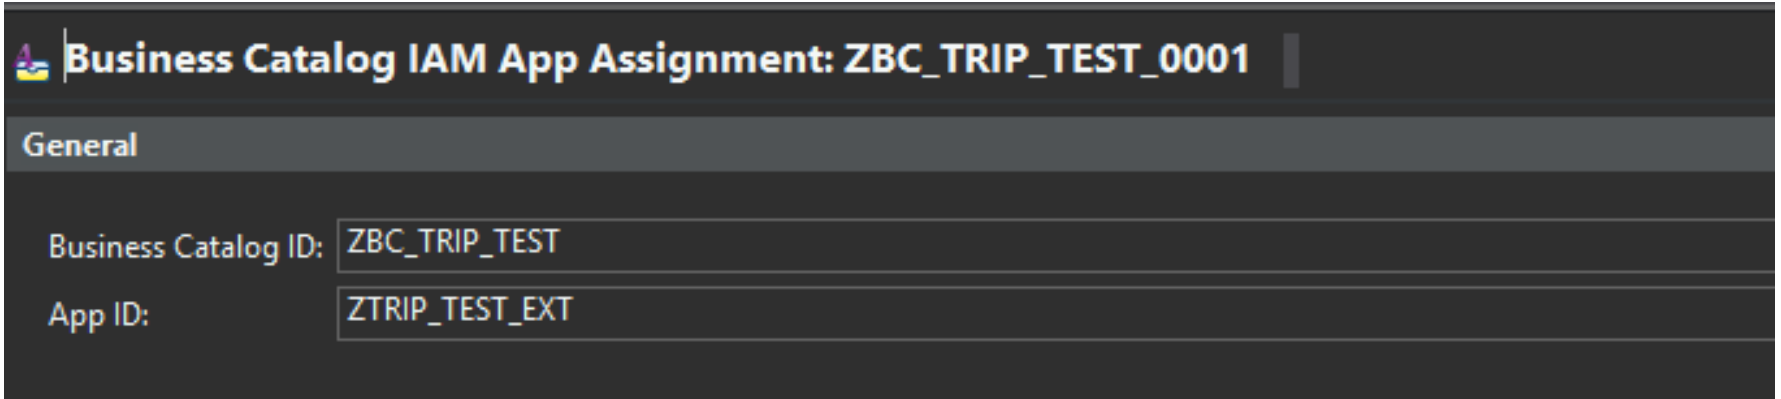

The screenshot shows a configuration window titled "Business Catalog IAM App Assignment: ZBC_TRIP_TEST_0001". It has a "General" tab selected. Below the tab, there are two input fields: "Business Catalog ID:" with the value "ZBC_TRIP_TEST" and "App ID:" with the value "ZTRIP_TEST_EXT".

Business Catalog IAM App Assignment: ZBC_TRIP_TEST_0001	
General	
Business Catalog ID:	ZBC_TRIP_TEST
App ID:	ZTRIP_TEST_EXT

Deploying RAP service

With Eclipse ADT tools

- What is migrating?
 - › “Since SAP S/4HANA 1709, features of the classic Launchpad Designer tool have been gradually deprecated”
 - › “Removal of the tool is tentatively planned for SAP S/4HANA 2025.”
 - › Jocelyn Dart - **Why and Getting Ready for Migration**
 - › <https://userapps.support.sap.com/sap/support/knowledge/en/3782495>

Generating service using AI?

Github Copilot – Claude Sonnet 5 – prompt

“ Generate a RAP OData UI V4 service using the 'OData UI Service' generator, based on the database table `ZTRIP` (located in package `ZFLEX_SITBE_DEMO`).

Put all generated objects in package `ZFLEX_SITBE_DEMO_AI` (which already exists).

Do not use a generic suffix field in the payload, specify each object name explicitly, following this naming scheme (all names must stay under 16 characters):

- All generated objects get the suffix `_AI`
- Except the service definition and service binding, where `_AI` goes immediately before `_O4` (e.g. `ZUI_TRIP_AI_O4`)
- Except the draft table, where `_D` goes at the very end of the name (e.g. `ZTRIP_AI_D`)


Use standard RAP naming conventions for the base names (root entity `ZR_`, projection entity `ZC_`, root behavior class `ZBP_R_`, projection behavior class `ZBP_C_`, service `ZUI_..._O4`), derived from the table name `ZTRIP` → project identifier `TRIP`.

No transport request is needed (transport recording is not enabled for this package). Activate all generated objects after creation. ”

Generating service using AI?

Github Copilot – Claude Sonnet 5

- Result - RAP service:

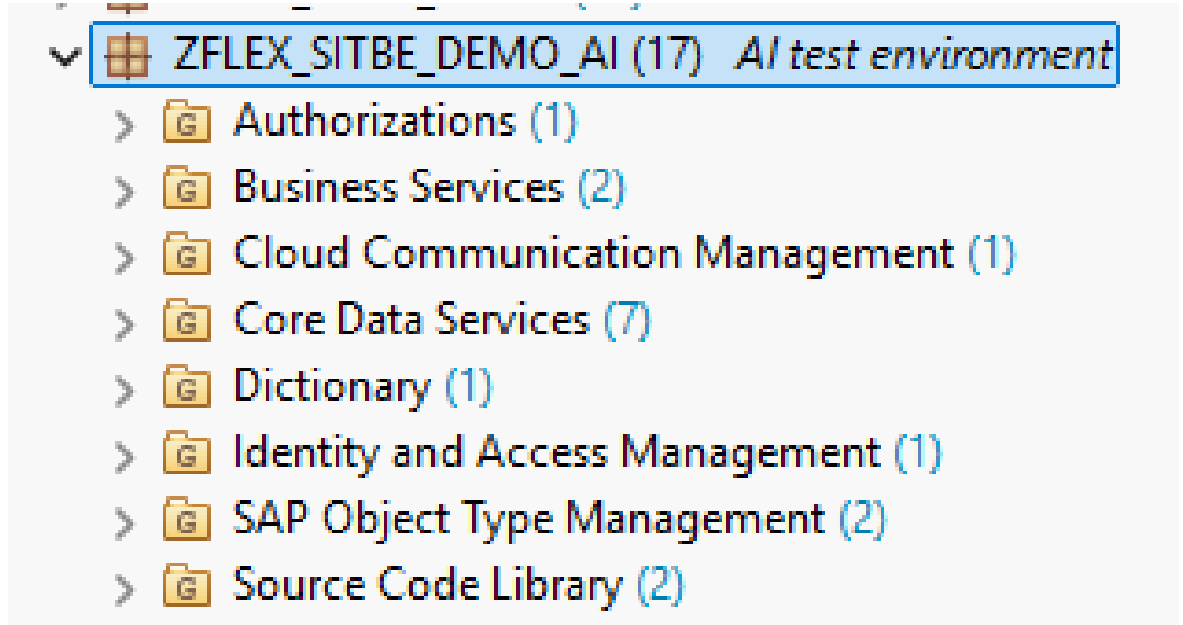

Generating service using AI?

Github Copilot – Claude Sonnet 5

- Result - RAP service:

 **Service Binding: ZUI_TRIP_AI_O4**    

General Information

This section describes general information about this service binding

Binding Type: OData V4 - UI

Services

Define services associated with the Service Binding

[Default Authorization Values:](#) 25C6ADB01CEC92EDD84EC0A89B3D34HT

Local Service Endpoint:

Service Name	Version	API State	Service Definition
▼ ZUI_TRIP_AI_O4			
	1.0.0	Not Released	ZUI_TRIP_AI_O4

Service Version Details

View information on selected service version

Service Information

Local service endpoint is not published. [Publish local service endpoint](#) to view service URL, entity sets and associations.

Generating service using AI?

Github Copilot – Claude Sonnet 5

- Result - RAP service:

 Preview for Fiori Elements App ▼

Standard ▼

LS

 ▼

Editing Status:

All ▼

UUID:

StartDate:

EndDate:

SeatsTotal:

SeatsBooked:

BusType:

StartLocation:

EndLocation:

TicketPrice:

ProcessingStatus:

Time Stamp:

Changed On:

Changed On:

Created By:

Changed By:

Go

Adapt Filters

^

✳

CreateDelete



Generating Fiori App using AI?


Github Copilot – Claude Sonnet 5

- In eclipse not mature yet

Business case requirement

Recap

- Application quickly generated
 - › Thanks to ABAP development tools
- Page automatically generated
 - › Thanks to metadata
- CRUD functionalities
 - › Default value set

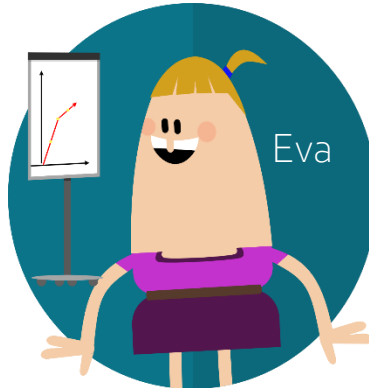

Business case requirement

Recap

- Multiple people will use this app
 - › Don't let users block each other by locking objects
- Collaborative draft
 - › Edit together




Business case requirement

Recap

- Recalculate the price depending on business logic
 - › Calculation should not block the user while using the app
- Background processing framework (BgPF)
 - › To run heavy calculations in the background
- Event-driven side effects
 - › Automatically updates UI



BgPF recap

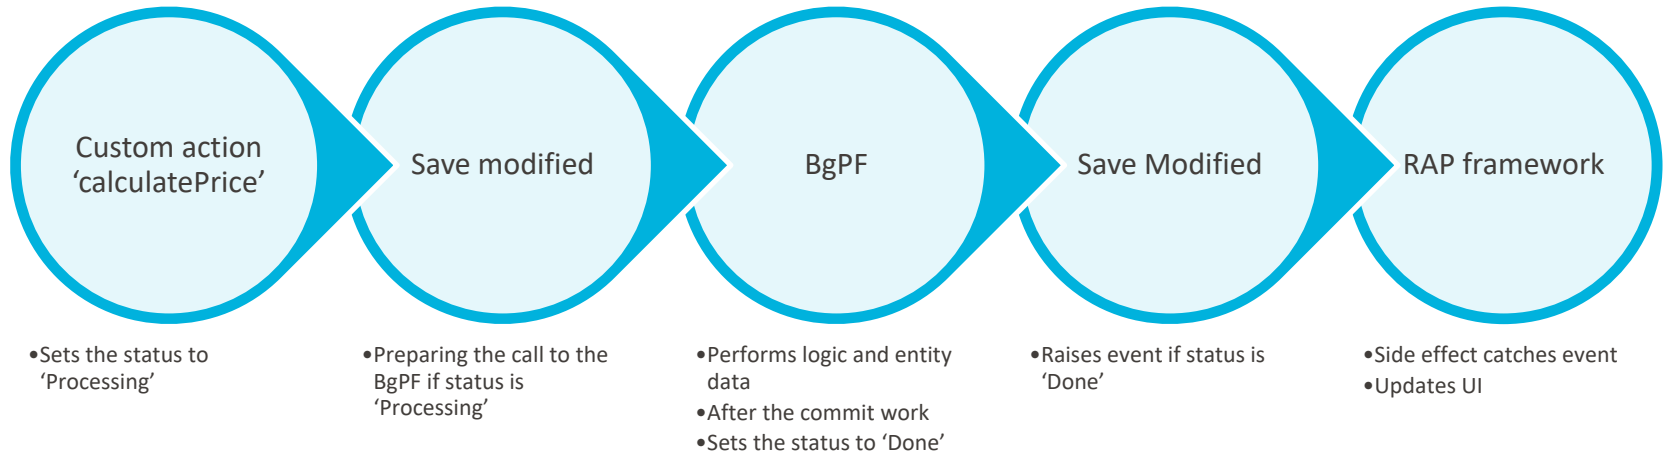

Agenda

- ~~Demo~~
 - ~~Business case~~
 - ~~Environment context~~
 - ~~Live showcase in parts~~
- Additional updates
- Key Takeaways
- SAP roadmap
- Q&A

Additional updates

READ ITAB with logical expression


- Syntax since ABAP release 9.18
 - › Old
 - LOOP AT itab ... WHERE log_exp ENDLOOP.
 - › New
 - READ TABLE itab WHERE log_exp.

```
LOOP AT lt_trip ASSIGNING FIELD-  
SYMBOL(<lfs_trip>)  
  
where ticket price is INITIAL or  
processing status = 'PROCESSING' .  
  
<lfs_trip>-processing_status = 'DONE'.  
ENDLOOP.
```

```
READ TABLE lt_trip INTO DATA(ls_trip)  
  
WHERE ticket price is INITIAL or  
processing status = 'PROCESSING' .  
  
IF sy-subrc = 0.  
  ls_trip-processing_status = 'DONE'.  
  ls_trip-ticket_price = 4.  
endif.
```

Where-used on annotations

SAP BTP ABAP environment 2411 - SAP S/4HANA Cloud Public Edition 2502

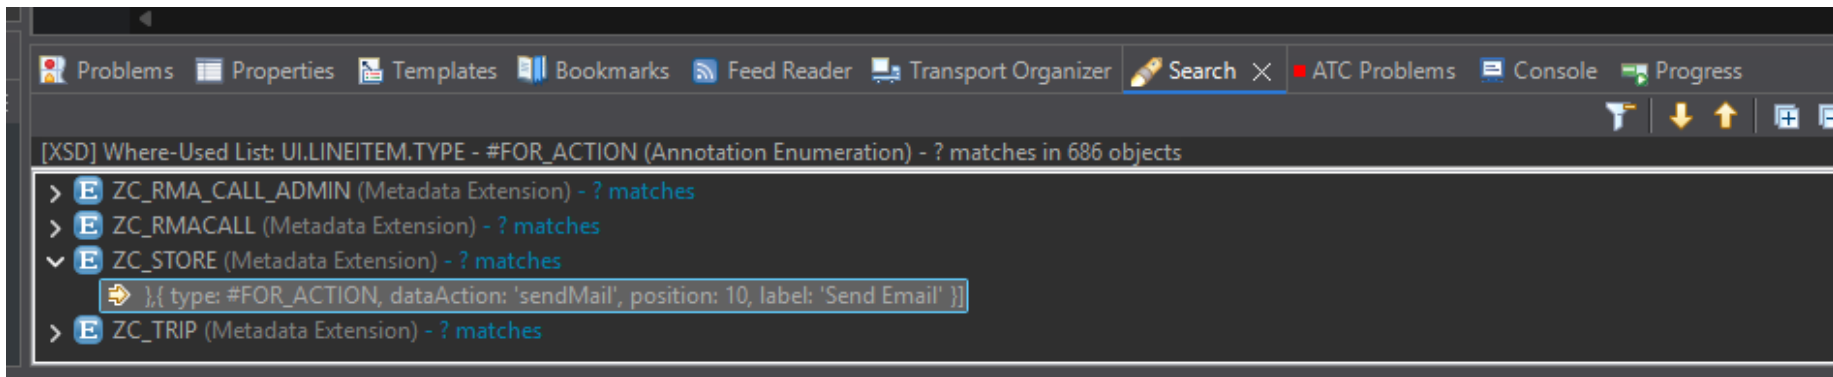

Key Takeaways

Key Takeaways

- Metadata-driven UI
- Collaborative draft
- Background Processing (BgPF)
- Event-driven side effects
- Generating with Eclipse ADT
- Generating with AI?



SAP roadmap

SAP roadmap

- BgPF
 - › [SAP BTP ABAP environment 2308](#)
 - › SAP Cloud ERP **2023**
 - › SAP Cloud ERP Private **2023**
 - › SAP S/4HANA **2023**
- Collaborative draft
 - › [2402 release of SAP Fiori](#)
 - › [SAP BTP ABAP environment 2508](#)
 - › SAP Cloud ERP **2508**
 - › SAP Cloud ERP Private **2025**
 - › SAP S/4HANA **2025**
- Event-driven side effects
 - › [SAP BTP ABAP environment 2502](#)
 - › [SAP Cloud ERP 2502](#)
 - › [SAP Cloud ERP Private 2025](#)
 - › [SAP S/4HANA 2025](#)
- ABAP repository object generator
 - › [Release 2022 on all environments](#)
 - › ABAP development tools (3.26.2 or higher)
- ABAP quick Fiori generator
 - › SAP BTP ABAP environment **2505**
 - › SAP Cloud ERP **2508**
 - › ABAP development tools (3.50 or higher)

Sources

Sources

- [How to make a Cloud Fiori app](#)
- [How to deploy a Cloud Fiori app](#)
- [BgPF](#)
- [Collab draft](#)
- [Where-used on annotations](#)
- [READ ITAB with log_cond](#)



