

Московский Авиационный Институт
(Национальный Исследовательский Университет)
Институт №8 “Компьютерные науки и прикладная математика”
Кафедра №806 “Вычислительная математика и программирование”

Лабораторная работа №2 по курсу
«Операционные системы»

Группа: М8О-211Б-23

Студент: Тропн М.А.

Преподаватель: Бахарев В.Д.

Оценка: _____

Дата: 31.10.24

Москва, 2024

Постановка задачи

Вариант 15.

Цель работы

Приобретение практических навыков в:

- Управление потоками в ОС
- Обеспечение синхронизации между потоками

Задание

Составить программу на языке Си(C++), обрабатывающую данные в многопоточном режиме. При обработке использовать стандартные средства создания потоков операционной системы (Windows/Unix). Ограничение максимального количества потоков, работающих в один момент времени, должно быть задано ключом запуска вашей программы.

Так же необходимо уметь продемонстрировать количество потоков, используемое вашей программой с помощью стандартных средств операционной системы.

В отчете привести исследование зависимости ускорения и эффективности алгоритма от входных данных и количества потоков. Получившиеся результаты необходимо объяснить.

15 вариант) Есть колода из 52 карт, рассчитать экспериментально (метод Монте-Карло) вероятность того, что сверху лежат две одинаковых карты. Количество раундов задаётся ключом программы.

Общий метод и алгоритм решения

Использованные системные вызовы:

- `int pthread_create(pthread_t * __restrict __newthread, const pthread_attr_t * __restrict __attr, void *(* __start_routine)(void *), void * __restrict __arg)` — создаёт поток с рутиной (стартовой функцией) и заданными аргументами
- `int pthread_join(pthread_t __th, void ** __thread_return)` — вызов потока
- `ssize_t read(int __fd, void* __buf, size_t __nbytes)` — чтение из `fd` в буфер
- `ssize_t write(int __fd, const void* __buf, size_t __n)` — запись байтов в буфер
- `void exit(int status)` - завершения выполнения процесса и возвращение статуса

Также используется:


`std::atomic` — атомарный тип данных вместо `std::mutex`

Создаём потоки (кол-во указывается ключом программы). Аргументом функции `pthread_create` будет являться функция `just_do` с аргументом `rounds` (рассчитывается как общее кол-во раундов (является вторым ключом программы), разделенное на кол-во потоков). Таким образом, каждый поток будет рассчитывать приблизительно одинаковое количество раундов. Также введем атомарный счетчик `ac` (атомарность обязательна, в противном случае между потоками происходит т. н. «data race», из-за чего кол-во счетчика не совпадает с действительностью (потоки борются за получение доступа к счетчику. Использование мьютекса в задаче излишне, ведь увеличатся затраты на обращение к Kernel).

Сам метод Монте-Карло заключается в оперировании случайностями. По заданию необходимо найти вероятность того, что первые две карты в колоде (52 карты) будут одинаковой масти можно рассчитать проведя эксперимент — взять колоду, перемешать её и проверить что верхние карты одинаковы. Колоду будем перемешивать стандартным алгоритмом C++ `std::shuffle`. В таком удачном случае счетчик `as` будем атомарно увеличивать. В итоге вероятность будем рассчитывать как результат деления количества удачных исходов на общее количество раундов.


При $N=1000000$. Time — в секундах

Threads	Time	Uskor	Efficiency
1	3.238	1.000000	1.000000
2	1.743	1.857717	0.928858
3	1.349	2.400297	0.800099
4	1.116	2.901434	0.725358
5	1.200	2.698333	0.539667
6	0.870	3.721839	0.620307
7	0.779	4.156611	0.593802
8	0.717	4.516039	0.564505
9	0.748	4.328877	0.480986
10	0.684	4.733918	0.473392
11	0.639	5.067293	0.460663
12	0.631	5.131537	0.427628

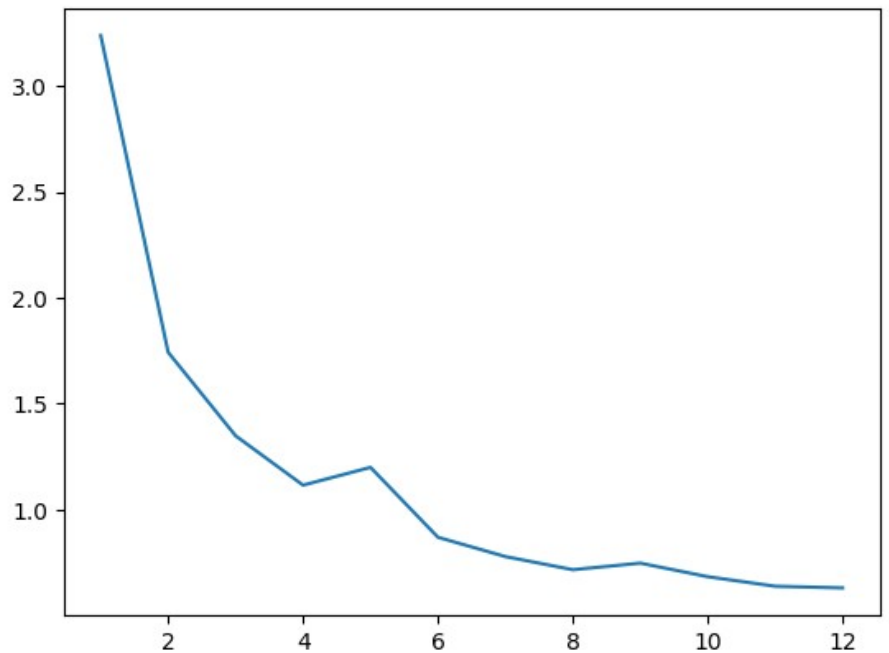

При `threads=12`. Time — в секундах

N	Time
100	0.012
1000	0.013
10000	0.019
100000	0.085
1000000	0.676
10000000	5.907
100000000	61.158
1000000000	623.903

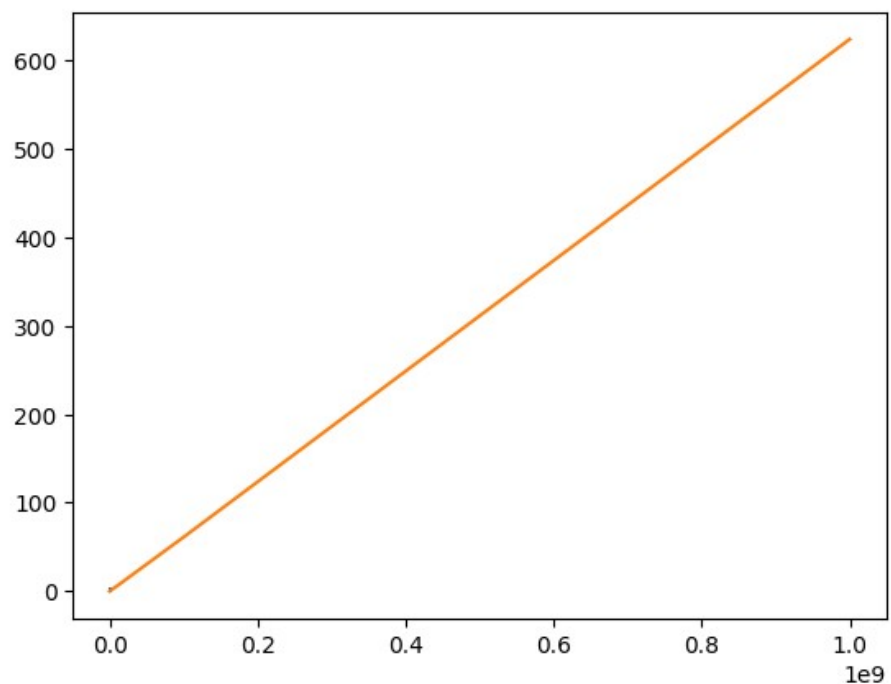

Код программы

main.cpp

```
#include <algorithm>
#include <atomic>
#include <pthread.h>
#include <random>
#include <stdarg.h>
#include <string.h>
#include <unistd.h>
#include <vector>
```

```
#define
print(text, ...) \
```

```
do
{ \
```

```
    char
    BUF[BUFSIZ]; \
```

```
        vsprintf(BUF, text,
__VA_ARGS__); \
```

```
myCout(BUF); \
```

```
    } while (0)
```

```
#define all(x) x.begin(), x.end()
```

```
#define THREADS_NUM 16
```

```
#define BARRIERS_NUM 16
```

```
#define DECK_NUM 52
```

```
std::atomic_int ac{0};
```

```
void *just_do(void *args) {
```

```
    size_t round = *(size_t *)args;
```

```
    std::random_device rd;
```

```
    std::mt19937 random_generator(rd());
```

```
    int local = 0;
```

```

std::vector<int> deck(DECK_NUM);
for (size_t j = 0; j < DECK_NUM; j++) {
    deck[j] = j;
}
for (size_t i = 0; i < round; i++) {
    std::shuffle(all(deck), random_generator);
    if (deck[0] % 4 == deck[1] % 4) {
        ++local;
    }
}
ac += local;

return NULL;
}

void _print(char *fmt, ...) {
    va_list args;
    va_start(args, fmt);
    char BUF[BUFSIZ];
    vsprintf(BUF, fmt, args);
    if (-1 == write(STDOUT_FILENO, BUF, strlen(BUF))) {
        exit(EXIT_FAILURE);
    }
    va_end(args);
}

int main(int argc, char **argv) {
    if (argc != 3) {
        _print("Input error. Use: %s <threads> <rounds>\n", argv[0]);
        exit(EXIT_FAILURE);
    }
    if (argv[1] == NULL || argv[2] == NULL) {
        _print("Input error. Use: %s <threads> <rounds>\n", argv[0]);
    }
}

```

```

        exit(EXIT_FAILURE);
    }
    // ограничение потоков и количество раундов
    size_t threads_num = atol(argv[1]);
    size_t rounds = atol(argv[2]);
    size_t rounds_for_thread = rounds / threads_num;
    if (rounds % threads_num != 0) {
        threads_num++;
    }
    rounds_for_thread = rounds / threads_num;
    std::vector<pthread_t> threads(threads_num);
    for (size_t i = 0; i < threads_num; i++) {
        if (-1 == pthread_create(&(threads[i]), NULL, just_do,
                                (void *)&rounds_for_thread)) {
            _print("Error. Thread %d nor created\n", i);
            exit(EXIT_FAILURE);
        };
    }

    for (auto &thread : threads) {
        if (-1 == pthread_join(thread, NULL)) {
            _print("Error. Thread not joined\n");
            exit(EXIT_FAILURE);
        };
    }

    // выводилка удачный попаданий
    {
        int b = ac.load();
        _print("== %d ==\n", b);
    }

    {

```

```

// расчёты

int total_rounds = rounds; // threads_num * rounds;

int f = ac.load();

double probability = (double)f / (double)total_rounds;

char BUF[BUFSIZ];

sprintf(BUF, "== %f ==\n", probability);

_print("%s\n", BUF);

}

return EXIT_SUCCESS;

}

```

Протокол работы программы

Тестирование:

```

lemito@lemito:~/Desktop/0Si/lab2/out/build/gcc$
/home/lemito/Desktop/0Si/lab2/out/build/gcc/lab2 12 1000000

```

```

== 234392 ==

```

```

== 0.234392 ==

```

```

lemito@lemito:~/Desktop/0Si/lab2/out/build/gcc$ time
/home/lemito/Desktop/0Si/lab2/out/build/gcc/lab2 12 1000000

```

```

== 235216 ==

```

```

== 0.235216 ==

```

```

real    0m0.631s

```

```

user    0m6.150s

```

```

sys     0m0.010s

```

```

lemito@lemito:~/Desktop/0Si/lab2/out/build/gcc$ time
/home/lemito/Desktop/0Si/lab2/out/build/gcc/lab2 6 1000000

```

```

== 235308 ==

```

```

== 0.235308 ==

```

```

real    0m0.870s

```

```
user    0m4.887s
```

```
sys     0m0.006s
```

```
lemito@lemito:~/Desktop/0Si/lab2/out/build/gcc$ time  
/home/lemito/Desktop/0Si/lab2/out/build/gcc/lab2 3 1000000
```

```
== 235482 ==
```

```
== 0.235482 ==
```

```
real    0m1.349s
```

```
user    0m3.976s
```

```
sys     0m0.003s
```

```
lemito@lemito:~/Desktop/0Si/lab2/out/build/gcc$ time  
/home/lemito/Desktop/0Si/lab2/out/build/gcc/lab2 1 1000000
```

```
== 235372 ==
```

```
== 0.235372 ==
```

```
real    0m3.238s
```

```
user    0m3.230s
```

```
sys     0m0.007s
```

```
lemito@lemito:~/Desktop/0Si/lab2/out/build/gcc$ time  
/home/lemito/Desktop/0Si/lab2/out/build/gcc/lab2 12 1000
```

```
== 254 ==
```

```
== 0.254000 ==
```

```
real    0m0.012s
```

```
user    0m0.010s
```

```
sys     0m0.007s
```

Strace:

```
175226 execve("/home/lemito/Desktop/0Si/lab2/out/build/gcc/lab2",  
["/home/lemito/Desktop/0Si/lab2/ou"... , "12", "1000000"], 0x7fffb4e1e668 /* 118 vars  
*/) = 0
```

```
175226 brk(NULL) = 0x6236481d5000
```



```

175226 mmap(NULL, 8192, PROT_READ|PROT_WRITE, MAP_PRIVATE|MAP_ANONYMOUS, -1, 0)
= 0x7ec2ec769000

175226 access("/etc/ld.so.preload", R_OK) = -1 ENOENT (No such file or
directory)

175226 openat(AT_FDCWD, "/etc/ld.so.cache", O_RDONLY|O_CLOEXEC) = 3

175226 fstat(3, {st_mode=S_IFREG|0644, st_size=98135, ...}) = 0

175226 mmap(NULL, 98135, PROT_READ, MAP_PRIVATE, 3, 0) = 0x7ec2ec751000

175226 close(3)
= 0

175226 openat(AT_FDCWD, "/lib/x86_64-linux-gnu/libstdc++.so.6", O_RDONLY|
O_CLOEXEC) = 3

175226 read(3, "\177ELF\2\1\1\3\0\0\0\0\0\0\0\0\3\0>\
0\1\0\0\0\0\0\0\0\0\0\0"... , 832) = 832

175226 fstat(3, {st_mode=S_IFREG|0644, st_size=2592224, ...}) = 0

175226 mmap(NULL, 2609472, PROT_READ, MAP_PRIVATE|MAP_DENYWRITE, 3, 0) =
0x7ec2ec400000

175226 mmap(0x7ec2ec49d000, 1343488, PROT_READ|PROT_EXEC, MAP_PRIVATE|
MAP_FIXED|MAP_DENYWRITE, 3, 0x9d000) = 0x7ec2ec49d000

175226 mmap(0x7ec2ec5e5000, 552960, PROT_READ, MAP_PRIVATE|MAP_FIXED|
MAP_DENYWRITE, 3, 0x1e5000) = 0x7ec2ec5e5000

175226 mmap(0x7ec2ec66c000, 57344, PROT_READ|PROT_WRITE, MAP_PRIVATE|MAP_FIXED|
MAP_DENYWRITE, 3, 0x26b000) = 0x7ec2ec66c000

175226 mmap(0x7ec2ec67a000, 12608, PROT_READ|PROT_WRITE, MAP_PRIVATE|MAP_FIXED|
MAP_ANONYMOUS, -1, 0) = 0x7ec2ec67a000

175226 close(3)
= 0

175226 openat(AT_FDCWD, "/lib/x86_64-linux-gnu/libgcc_s.so.1", O_RDONLY|
O_CLOEXEC) = 3

175226 read(3, "\177ELF\2\1\1\0\0\0\0\0\0\0\0\0\3\0>\
0\1\0\0\0\0\0\0\0\0\0\0"... , 832) = 832

175226 fstat(3, {st_mode=S_IFREG|0644, st_size=183024, ...}) = 0

175226 mmap(NULL, 185256, PROT_READ, MAP_PRIVATE|MAP_DENYWRITE, 3, 0) =
0x7ec2ec723000

175226 mmap(0x7ec2ec727000, 147456, PROT_READ|PROT_EXEC, MAP_PRIVATE|MAP_FIXED|
MAP_DENYWRITE, 3, 0x4000) = 0x7ec2ec727000

175226 mmap(0x7ec2ec74b000, 16384, PROT_READ, MAP_PRIVATE|MAP_FIXED|
MAP_DENYWRITE, 3, 0x28000) = 0x7ec2ec74b000

175226 mmap(0x7ec2ec74f000, 8192, PROT_READ|PROT_WRITE, MAP_PRIVATE|MAP_FIXED|
MAP_DENYWRITE, 3, 0x2b000) = 0x7ec2ec74f000

175226 close(3)
= 0

175226 openat(AT_FDCWD, "/lib/x86_64-linux-gnu/libc.so.6", O_RDONLY|O_CLOEXEC)
= 3

```

```

175226 read(3, "\177ELF\2\1\1\3\0\0\0\0\0\0\0\3\0>\
0\1\0\0\0\220\243\2\0\0\0\0\0"... , 832) = 832

175226 pread64(3, "\6\0\0\0\4\0\0\0@\0\0\0\0\0\0\0@\0\0\0\0\0\0\0@\
0\0\0\0\0\0\0"... , 784, 64) = 784

175226 fstat(3, {st_mode=S_IFREG|0755, st_size=2125328, ...}) = 0

175226 pread64(3, "\6\0\0\0\4\0\0\0@\0\0\0\0\0\0\0@\0\0\0\0\0\0\0@\
0\0\0\0\0\0\0"... , 784, 64) = 784

175226 mmap(NULL, 2170256, PROT_READ, MAP_PRIVATE|MAP_DENYWRITE, 3, 0) =
0x7ec2ec000000

175226 mmap(0x7ec2ec028000, 1605632, PROT_READ|PROT_EXEC, MAP_PRIVATE|
MAP_FIXED|MAP_DENYWRITE, 3, 0x28000) = 0x7ec2ec028000

175226 mmap(0x7ec2ec1b0000, 323584, PROT_READ, MAP_PRIVATE|MAP_FIXED|
MAP_DENYWRITE, 3, 0x1b0000) = 0x7ec2ec1b0000

175226 mmap(0x7ec2ec1ff000, 24576, PROT_READ|PROT_WRITE, MAP_PRIVATE|MAP_FIXED|
MAP_DENYWRITE, 3, 0x1fe000) = 0x7ec2ec1ff000

175226 mmap(0x7ec2ec205000, 52624, PROT_READ|PROT_WRITE, MAP_PRIVATE|MAP_FIXED|
MAP_ANONYMOUS, -1, 0) = 0x7ec2ec205000

175226 close(3) = 0

175226 openat(AT_FDCWD, "/lib/x86_64-linux-gnu/libm.so.6", 0_RDONLY|O_CLOEXEC)
= 3

175226 read(3, "\177ELF\2\1\1\3\0\0\0\0\0\0\0\3\0>\
0\1\0\0\0\0\0\0\0\0\0\0"... , 832) = 832

175226 fstat(3, {st_mode=S_IFREG|0644, st_size=952616, ...}) = 0

175226 mmap(NULL, 950296, PROT_READ, MAP_PRIVATE|MAP_DENYWRITE, 3, 0) =
0x7ec2ec317000

175226 mmap(0x7ec2ec327000, 520192, PROT_READ|PROT_EXEC, MAP_PRIVATE|MAP_FIXED|
MAP_DENYWRITE, 3, 0x10000) = 0x7ec2ec327000

175226 mmap(0x7ec2ec3a6000, 360448, PROT_READ, MAP_PRIVATE|MAP_FIXED|
MAP_DENYWRITE, 3, 0x8f000) = 0x7ec2ec3a6000

175226 mmap(0x7ec2ec3fe000, 8192, PROT_READ|PROT_WRITE, MAP_PRIVATE|MAP_FIXED|
MAP_DENYWRITE, 3, 0xe7000) = 0x7ec2ec3fe000

175226 close(3) = 0

175226 mmap(NULL, 8192, PROT_READ|PROT_WRITE, MAP_PRIVATE|MAP_ANONYMOUS, -1, 0)
= 0x7ec2ec721000

175226 mmap(NULL, 12288, PROT_READ|PROT_WRITE, MAP_PRIVATE|MAP_ANONYMOUS, -1,
0) = 0x7ec2ec71e000

175226 arch_prctl(ARCH_SET_FS, 0x7ec2ec71e740) = 0

175226 set_tid_address(0x7ec2ec71ea10) = 175226

175226 set_robust_list(0x7ec2ec71ea20, 24) = 0

175226 rseq(0x7ec2ec71f060, 0x20, 0, 0x53053053) = 0

```

```

175226 mprotect(0x7ec2ec1ff000, 16384, PROT_READ) = 0
175226 mprotect(0x7ec2ec3fe000, 4096, PROT_READ) = 0
175226 mprotect(0x7ec2ec74f000, 4096, PROT_READ) = 0
175226 mprotect(0x7ec2ec66c000, 45056, PROT_READ) = 0
175226 mprotect(0x62364770b000, 4096, PROT_READ) = 0
175226 mprotect(0x7ec2ec7a1000, 8192, PROT_READ) = 0
175226 prlimit64(0, RLIMIT_STACK, NULL, {rlim_cur=8192*1024,
rlim_max=RLIM64_INFINITY}) = 0
175226 munmap(0x7ec2ec751000, 98135) = 0
175226 futex(0x7ec2ec67a7bc, FUTEX_WAKE_PRIVATE, 2147483647) = 0
175226 getRandom("\xe8\x14\x89\x47\x67\xf4\x84\xb8", 8, GRND_NONBLOCK) = 8
175226 brk(NULL) = 0x6236481d5000
175226 brk(0x6236481f6000) = 0x6236481f6000
175226 rt_sigaction(SIGRT_1, {sa_handler=0x7ec2ec099520, sa_mask=[],
sa_flags=SA_RESTORER|SA_ONSTACK|SA_RESTART|SA_SIGINFO, sa_restorer=0x7ec2ec045320},
NULL, 8) = 0
175226 rt_sigprocmask(SIG_UNBLOCK, [RTMIN RT_1], NULL, 8) = 0
175226 mmap(NULL, 8392704, PROT_NONE, MAP_PRIVATE|MAP_ANONYMOUS|MAP_STACK, -1,
0) = 0x7ec2eb600000
175226 mprotect(0x7ec2eb601000, 8388608, PROT_READ|PROT_WRITE) = 0
175226 rt_sigprocmask(SIG_BLOCK, ~[], [], 8) = 0
175226 clone3({flags=CLONE_VM|CLONE_FS|CLONE_FILES|CLONE_SIGHAND|CLONE_THREAD|
CLONE_SYSVSEM|CLONE_SETTLS|CLONE_PARENT_SETTID|CLONE_CHILD_CLEARTID,
child_tid=0x7ec2ebe00990, parent_tid=0x7ec2ebe00990, exit_signal=0,
stack=0x7ec2eb600000, stack_size=0x7fff80, tls=0x7ec2ebe006c0} =>
{parent_tid=[175227]}), 88) = 175227
175226 rt_sigprocmask(SIG_SETMASK, [], <unfinished ...>
175227 rseq(0x7ec2ebe00fe0, 0x20, 0, 0x53053053 <unfinished ...>
175226 <... rt_sigprocmask resumed>NULL, 8) = 0
175227 <... rseq resumed>) = 0
175226 mmap(NULL, 8392704, PROT_NONE, MAP_PRIVATE|MAP_ANONYMOUS|MAP_STACK, -1,
0 <unfinished ...>
175227 set_robust_list(0x7ec2ebe009a0, 24 <unfinished ...>
175226 <... mmap resumed>) = 0x7ec2eac00000
175227 <... set_robust_list resumed>) = 0
175226 mprotect(0x7ec2eac01000, 8388608, PROT_READ|PROT_WRITE) = 0
175226 rt_sigprocmask(SIG_BLOCK, ~[], <unfinished ...>

```

```

175227 rt_sigprocmask(SIG_SETMASK, [], <unfinished ...>

175226 <... rt_sigprocmask resumed>[], 8) = 0

175226 clone3({flags=CLONE_VM|CLONE_FS|CLONE_FILES|CLONE_SIGHAND|CLONE_THREAD|
CLONE_SYSVSEM|CLONE_SETTLS|CLONE_PARENT_SETTID|CLONE_CHILD_CLEARID,
child_tid=0x7ec2eb400990, parent_tid=0x7ec2eb400990, exit_signal=0,
stack=0x7ec2eac00000, stack_size=0x7fff80, tls=0x7ec2eb4006c0} <unfinished ...>

175227 <... rt_sigprocmask resumed>NULL, 8) = 0

175226 <... clone3 resumed> => {parent_tid=[175228]}, 88) = 175228

175228 rseq(0x7ec2eb400fe0, 0x20, 0, 0x53053053 <unfinished ...>

175226 rt_sigprocmask(SIG_SETMASK, [], <unfinished ...>

175228 <... rseq resumed>) = 0

175226 <... rt_sigprocmask resumed>NULL, 8) = 0

175228 set_robust_list(0x7ec2eb4009a0, 24 <unfinished ...>

175226 mmap(NULL, 8392704, PROT_NONE, MAP_PRIVATE|MAP_ANONYMOUS|MAP_STACK, -1,
0 <unfinished ...>

175228 <... set_robust_list resumed>) = 0

175226 <... mmap resumed>) = 0x7ec2ea200000

175228 rt_sigprocmask(SIG_SETMASK, [], <unfinished ...>

175227 mmap(NULL, 134217728, PROT_NONE, MAP_PRIVATE|MAP_ANONYMOUS, -1, 0
<unfinished ...>

175226 mprotect(0x7ec2ea201000, 8388608, PROT_READ|PROT_WRITE <unfinished ...>

175228 <... rt_sigprocmask resumed>NULL, 8) = 0

175226 <... mprotect resumed>) = 0

175226 rt_sigprocmask(SIG_BLOCK, ~[], <unfinished ...>

175228 mmap(NULL, 134217728, PROT_NONE, MAP_PRIVATE|MAP_ANONYMOUS, -1, 0
<unfinished ...>

175227 <... mmap resumed>) = 0x7ec2e2200000

175226 <... rt_sigprocmask resumed>[], 8) = 0

175228 <... mmap resumed>) = 0x7ec2da200000

175226 clone3({flags=CLONE_VM|CLONE_FS|CLONE_FILES|CLONE_SIGHAND|CLONE_THREAD|
CLONE_SYSVSEM|CLONE_SETTLS|CLONE_PARENT_SETTID|CLONE_CHILD_CLEARID,
child_tid=0x7ec2eaa00990, parent_tid=0x7ec2eaa00990, exit_signal=0,
stack=0x7ec2ea200000, stack_size=0x7fff80, tls=0x7ec2eaa006c0} <unfinished ...>

175228 munmap(0x7ec2da200000, 31457280 <unfinished ...>

175227 munmap(0x7ec2e2200000, 31457280 <unfinished ...>

175228 <... munmap resumed>) = 0

175227 <... munmap resumed>) = 0

```

```

175226 <... clone3 resumed> => {parent_tid=[175229]}, 88) = 175229
175229 rseq(0x7ec2eaa00fe0, 0x20, 0, 0x53053053 <unfinished ...>
175228 munmap(0x7ec2e0000000, 35651584 <unfinished ...>
175226 rt_sigprocmask(SIG_SETMASK, [], <unfinished ...>
175229 <... rseq resumed>) = 0
175227 munmap(0x7ec2e8000000, 35651584 <unfinished ...>
175226 <... rt_sigprocmask resumed>NULL, 8) = 0
175229 set_robust_list(0x7ec2eaa009a0, 24 <unfinished ...>
175228 <... munmap resumed>) = 0
175226 mmap(NULL, 8392704, PROT_NONE, MAP_PRIVATE|MAP_ANONYMOUS|MAP_STACK, -1,
0 <unfinished ...>
175229 <... set_robust_list resumed>) = 0
175227 <... munmap resumed>) = 0
175226 <... mmap resumed>) = 0x7ec2e9800000
175229 rt_sigprocmask(SIG_SETMASK, [], <unfinished ...>
175228 mprotect(0x7ec2dc000000, 135168, PROT_READ|PROT_WRITE <unfinished ...>
175226 mprotect(0x7ec2e9801000, 8388608, PROT_READ|PROT_WRITE <unfinished ...>
175229 <... rt_sigprocmask resumed>NULL, 8) = 0
175228 <... mprotect resumed>) = 0
175227 mprotect(0x7ec2e4000000, 135168, PROT_READ|PROT_WRITE <unfinished ...>
175226 <... mprotect resumed>) = 0
175229 mmap(NULL, 134217728, PROT_NONE, MAP_PRIVATE|MAP_ANONYMOUS, -1, 0
<unfinished ...>
175227 <... mprotect resumed>) = 0
175229 <... mmap resumed>) = 0x7ec2d4000000
175229 munmap(0x7ec2d8000000, 67108864 <unfinished ...>
175226 rt_sigprocmask(SIG_BLOCK, ~[], <unfinished ...>
175229 <... munmap resumed>) = 0
175226 <... rt_sigprocmask resumed>[], 8) = 0
175229 mprotect(0x7ec2d4000000, 135168, PROT_READ|PROT_WRITE <unfinished ...>
175226 clone3({flags=CLONE_VM|CLONE_FS|CLONE_FILES|CLONE_SIGHAND|CLONE_THREAD|
CLONE_SYSVSEM|CLONE_SETTLS|CLONE_PARENT_SETTID|CLONE_CHILD_CLEARTID,
child_tid=0x7ec2ea000990, parent_tid=0x7ec2ea000990, exit_signal=0,
stack=0x7ec2e9800000, stack_size=0x7fff80, tls=0x7ec2ea0006c0} <unfinished ...>
175229 <... mprotect resumed>) = 0

```

```

175226 <... clone3 resumed> => {parent_tid=[175230]}, 88) = 175230
175230 rseq(0x7ec2ea000fe0, 0x20, 0, 0x53053053 <unfinished ...>
175226 rt_sigprocmask(SIG_SETMASK, [], <unfinished ...>
175230 <... rseq resumed>) = 0
175226 <... rt_sigprocmask resumed>NULL, 8) = 0
175230 set_robust_list(0x7ec2ea0009a0, 24 <unfinished ...>
175226 mmap(NULL, 8392704, PROT_NONE, MAP_PRIVATE|MAP_ANONYMOUS|MAP_STACK, -1,
0 <unfinished ...>
175230 <... set_robust_list resumed>) = 0
175226 <... mmap resumed>) = 0x7ec2e8e00000
175230 rt_sigprocmask(SIG_SETMASK, [], <unfinished ...>
175226 mprotect(0x7ec2e8e01000, 8388608, PROT_READ|PROT_WRITE <unfinished ...>
175230 <... rt_sigprocmask resumed>NULL, 8) = 0
175226 <... mprotect resumed>) = 0
175230 mmap(0x7ec2d8000000, 67108864, PROT_NONE, MAP_PRIVATE|MAP_ANONYMOUS, -1,
0 <unfinished ...>
175226 rt_sigprocmask(SIG_BLOCK, ~[], <unfinished ...>
175230 <... mmap resumed>) = 0x7ec2d0000000
175226 <... rt_sigprocmask resumed>[], 8) = 0
175230 mprotect(0x7ec2d0000000, 135168, PROT_READ|PROT_WRITE <unfinished ...>
175226 clone3({flags=CLONE_VM|CLONE_FS|CLONE_FILES|CLONE_SIGHAND|CLONE_THREAD|
CLONE_SYSVSEM|CLONE_SETTLS|CLONE_PARENT_SETTID|CLONE_CHILD_CLEARTID,
child_tid=0x7ec2e9600990, parent_tid=0x7ec2e9600990, exit_signal=0,
stack=0x7ec2e8e00000, stack_size=0x7fff80, tls=0x7ec2e96006c0} <unfinished ...>
175230 <... mprotect resumed>) = 0
175226 <... clone3 resumed> => {parent_tid=[175231]}, 88) = 175231
175231 rseq(0x7ec2e9600fe0, 0x20, 0, 0x53053053 <unfinished ...>
175226 rt_sigprocmask(SIG_SETMASK, [], <unfinished ...>
175231 <... rseq resumed>) = 0
175226 <... rt_sigprocmask resumed>NULL, 8) = 0
175231 set_robust_list(0x7ec2e96009a0, 24 <unfinished ...>
175226 mmap(NULL, 8392704, PROT_NONE, MAP_PRIVATE|MAP_ANONYMOUS|MAP_STACK, -1,
0 <unfinished ...>
175231 <... set_robust_list resumed>) = 0
175226 <... mmap resumed>) = 0x7ec2e8400000
175231 rt_sigprocmask(SIG_SETMASK, [], <unfinished ...>

```

```

175226 mprotect(0x7ec2e8401000, 8388608, PROT_READ|PROT_WRITE <unfinished ...>
175231 <... rt_sigprocmask resumed>NULL, 8) = 0
175226 <... mprotect resumed>) = 0
175226 rt_sigprocmask(SIG_BLOCK, ~[], <unfinished ...>
175231 mmap(NULL, 134217728, PROT_NONE, MAP_PRIVATE|MAP_ANONYMOUS, -1, 0
<unfinished ...>
175226 <... rt_sigprocmask resumed>[], 8) = 0
175231 <... mmap resumed>) = 0x7ec2c8000000
175226 clone3({flags=CLONE_VM|CLONE_FS|CLONE_FILES|CLONE_SIGHAND|CLONE_THREAD|
CLONE_SYSVSEM|CLONE_SETTLS|CLONE_PARENT_SETTID|CLONE_CHILD_CLEARTID,
child_tid=0x7ec2e8c00990, parent_tid=0x7ec2e8c00990, exit_signal=0,
stack=0x7ec2e8400000, stack_size=0x7fff80, tls=0x7ec2e8c006c0} <unfinished ...>
175231 munmap(0x7ec2cc000000, 67108864) = 0
175226 <... clone3 resumed> => {parent_tid=[175232]}, 88) = 175232
175231 mprotect(0x7ec2c8000000, 135168, PROT_READ|PROT_WRITE <unfinished ...>
175226 rt_sigprocmask(SIG_SETMASK, [], <unfinished ...>
175232 rseq(0x7ec2e8c00fe0, 0x20, 0, 0x53053053 <unfinished ...>
175226 <... rt_sigprocmask resumed>NULL, 8) = 0
175231 <... mprotect resumed>) = 0
175226 mmap(NULL, 8392704, PROT_NONE, MAP_PRIVATE|MAP_ANONYMOUS|MAP_STACK, -1,
0 <unfinished ...>
175232 <... rseq resumed>) = 0
175226 <... mmap resumed>) = 0x7ec2e3600000
175232 set_robust_list(0x7ec2e8c009a0, 24 <unfinished ...>
175226 mprotect(0x7ec2e3601000, 8388608, PROT_READ|PROT_WRITE <unfinished ...>
175232 <... set_robust_list resumed>) = 0
175226 <... mprotect resumed>) = 0
175232 rt_sigprocmask(SIG_SETMASK, [], <unfinished ...>
175226 rt_sigprocmask(SIG_BLOCK, ~[], <unfinished ...>
175232 <... rt_sigprocmask resumed>NULL, 8) = 0
175226 <... rt_sigprocmask resumed>[], 8) = 0
175226 clone3({flags=CLONE_VM|CLONE_FS|CLONE_FILES|CLONE_SIGHAND|CLONE_THREAD|
CLONE_SYSVSEM|CLONE_SETTLS|CLONE_PARENT_SETTID|CLONE_CHILD_CLEARTID,
child_tid=0x7ec2e3e00990, parent_tid=0x7ec2e3e00990, exit_signal=0,
stack=0x7ec2e3600000, stack_size=0x7fff80, tls=0x7ec2e3e006c0} <unfinished ...>
175232 mmap(0x7ec2cc000000, 67108864, PROT_NONE, MAP_PRIVATE|MAP_ANONYMOUS, -1,
0) = 0x7ec2c4000000

```

```

175226 <... clone3 resumed> => {parent_tid=[175233]}, 88) = 175233
175233 rseq(0x7ec2e3e00fe0, 0x20, 0, 0x53053053 <unfinished ...>
175232 mprotect(0x7ec2c4000000, 135168, PROT_READ|PROT_WRITE <unfinished ...>
175226 rt_sigprocmask(SIG_SETMASK, [], <unfinished ...>
175233 <... rseq resumed>) = 0
175226 <... rt_sigprocmask resumed>NULL, 8) = 0
175232 <... mprotect resumed>) = 0
175226 mmap(NULL, 8392704, PROT_NONE, MAP_PRIVATE|MAP_ANONYMOUS|MAP_STACK, -1,
0 <unfinished ...>
175233 set_robust_list(0x7ec2e3e009a0, 24 <unfinished ...>
175226 <... mmap resumed>) = 0x7ec2e2c00000
175233 <... set_robust_list resumed>) = 0
175226 mprotect(0x7ec2e2c01000, 8388608, PROT_READ|PROT_WRITE <unfinished ...>
175233 rt_sigprocmask(SIG_SETMASK, [], <unfinished ...>
175226 <... mprotect resumed>) = 0
175233 <... rt_sigprocmask resumed>NULL, 8) = 0
175226 rt_sigprocmask(SIG_BLOCK, ~[], [], 8) = 0
175233 mmap(NULL, 134217728, PROT_NONE, MAP_PRIVATE|MAP_ANONYMOUS, -1, 0
<unfinished ...>
175226 clone3({flags=CLONE_VM|CLONE_FS|CLONE_FILES|CLONE_SIGHAND|CLONE_THREAD|
CLONE_SYSVSEM|CLONE_SETTLS|CLONE_PARENT_SETTID|CLONE_CHILD_CLEARTID,
child_tid=0x7ec2e3400990, parent_tid=0x7ec2e3400990, exit_signal=0,
stack=0x7ec2e2c00000, stack_size=0x7fff80, tls=0x7ec2e34006c0} <unfinished ...>
175233 <... mmap resumed>) = 0x7ec2bc000000
175233 munmap(0x7ec2c0000000, 67108864 <unfinished ...>
175226 <... clone3 resumed> => {parent_tid=[175234]}, 88) = 175234
175234 rseq(0x7ec2e3400fe0, 0x20, 0, 0x53053053 <unfinished ...>
175233 <... munmap resumed>) = 0
175226 rt_sigprocmask(SIG_SETMASK, [], <unfinished ...>
175234 <... rseq resumed>) = 0
175226 <... rt_sigprocmask resumed>NULL, 8) = 0
175233 mprotect(0x7ec2bc000000, 135168, PROT_READ|PROT_WRITE <unfinished ...>
175226 mmap(NULL, 8392704, PROT_NONE, MAP_PRIVATE|MAP_ANONYMOUS|MAP_STACK, -1,
0 <unfinished ...>
175234 set_robust_list(0x7ec2e34009a0, 24 <unfinished ...>
175233 <... mprotect resumed>) = 0

```



```

175226 <... mmap resumed>)                = 0x7ec2e2200000
175234 <... set_robust_list resumed>)      = 0
175226 mprotect(0x7ec2e2201000, 8388608, PROT_READ|PROT_WRITE <unfinished ...>
175234 rt_sigprocmask(SIG_SETMASK, [], <unfinished ...>
175226 <... mprotect resumed>)              = 0
175234 <... rt_sigprocmask resumed>NULL, 8) = 0
175226 rt_sigprocmask(SIG_BLOCK, ~[], [], 8) = 0
175234 mmap(0x7ec2c0000000, 67108864, PROT_NONE, MAP_PRIVATE|MAP_ANONYMOUS, -1,
0 <unfinished ...>

175226 clone3({flags=CLONE_VM|CLONE_FS|CLONE_FILES|CLONE_SIGHAND|CLONE_THREAD|
CLONE_SYSVSEM|CLONE_SETTLS|CLONE_PARENT_SETTID|CLONE_CHILD_CLEARTID,
child_tid=0x7ec2e2a00990, parent_tid=0x7ec2e2a00990, exit_signal=0,
stack=0x7ec2e2200000, stack_size=0x7fff80, tls=0x7ec2e2a006c0} <unfinished ...>

175234 <... mmap resumed>)                = 0x7ec2b8000000
175234 mprotect(0x7ec2b8000000, 135168, PROT_READ|PROT_WRITE <unfinished ...>
175226 <... clone3 resumed> => {parent_tid=[175235]}, 88) = 175235
175235 rseq(0x7ec2e2a00fe0, 0x20, 0, 0x53053053 <unfinished ...>
175226 rt_sigprocmask(SIG_SETMASK, [], <unfinished ...>
175234 <... mprotect resumed>)              = 0
175226 <... rt_sigprocmask resumed>NULL, 8) = 0
175235 <... rseq resumed>)                  = 0
175226 mmap(NULL, 8392704, PROT_NONE, MAP_PRIVATE|MAP_ANONYMOUS|MAP_STACK, -1,
0) = 0x7ec2e1800000
175226 mprotect(0x7ec2e1801000, 8388608, PROT_READ|PROT_WRITE) = 0
175226 rt_sigprocmask(SIG_BLOCK, ~[], [], 8) = 0

175226 clone3({flags=CLONE_VM|CLONE_FS|CLONE_FILES|CLONE_SIGHAND|CLONE_THREAD|
CLONE_SYSVSEM|CLONE_SETTLS|CLONE_PARENT_SETTID|CLONE_CHILD_CLEARTID,
child_tid=0x7ec2e2000990, parent_tid=0x7ec2e2000990, exit_signal=0,
stack=0x7ec2e1800000, stack_size=0x7fff80, tls=0x7ec2e20006c0} =>
{parent_tid=[175236]}, 88) = 175236

175236 rseq(0x7ec2e2000fe0, 0x20, 0, 0x53053053 <unfinished ...>
175226 rt_sigprocmask(SIG_SETMASK, [], <unfinished ...>
175236 <... rseq resumed>)                  = 0
175226 <... rt_sigprocmask resumed>NULL, 8) = 0
175236 set_robust_list(0x7ec2e20009a0, 24 <unfinished ...>
175226 mmap(NULL, 8392704, PROT_NONE, MAP_PRIVATE|MAP_ANONYMOUS|MAP_STACK, -1,
0 <unfinished ...>

```

```

175236 <... set_robust_list resumed>)    = 0
175226 <... mmap resumed>)                = 0x7ec2e0e00000
175236 rt_sigprocmask(SIG_SETMASK, [], <unfinished ...>
175226 mprotect(0x7ec2e0e01000, 8388608, PROT_READ|PROT_WRITE <unfinished ...>
175236 <... rt_sigprocmask resumed>NULL, 8) = 0
175226 <... mprotect resumed>)            = 0
175226 rt_sigprocmask(SIG_BLOCK, ~[], <unfinished ...>
175236 openat(AT_FDCWD, "/sys/devices/system/cpu/online", 0_RDONLY|O_CLOEXEC
<unfinished ...>
175226 <... rt_sigprocmask resumed>[], 8) = 0
175236 <... openat resumed>)                = 3
175226 clone3({flags=CLONE_VM|CLONE_FS|CLONE_FILES|CLONE_SIGHAND|CLONE_THREAD|
CLONE_SYSVSEM|CLONE_SETTLS|CLONE_PARENT_SETTID|CLONE_CHILD_CLEARTID,
child_tid=0x7ec2e1600990, parent_tid=0x7ec2e1600990, exit_signal=0,
stack=0x7ec2e0e00000, stack_size=0x7fff80, tls=0x7ec2e16006c0} <unfinished ...>
175236 read(3, "0-11\n", 1024)            = 5
175226 <... clone3 resumed> => {parent_tid=[175237]}, 88) = 175237
175237 rseq(0x7ec2e1600fe0, 0x20, 0, 0x53053053 <unfinished ...>
175226 rt_sigprocmask(SIG_SETMASK, [], <unfinished ...>
175237 <... rseq resumed>)                  = 0
175226 <... rt_sigprocmask resumed>NULL, 8) = 0
175237 set_robust_list(0x7ec2e16009a0, 24 <unfinished ...>
175226 mmap(NULL, 8392704, PROT_NONE, MAP_PRIVATE|MAP_ANONYMOUS|MAP_STACK, -1,
0) = 0x7ec2e0400000
175237 <... set_robust_list resumed>)      = 0
175236 close(3 <unfinished ...>
175226 mprotect(0x7ec2e0401000, 8388608, PROT_READ|PROT_WRITE <unfinished ...>
175237 rt_sigprocmask(SIG_SETMASK, [], <unfinished ...>
175226 <... mprotect resumed>)              = 0
175237 <... rt_sigprocmask resumed>NULL, 8) = 0
175236 <... close resumed>)                 = 0
175226 rt_sigprocmask(SIG_BLOCK, ~[], <unfinished ...>
175237 openat(AT_FDCWD, "/sys/devices/system/cpu/online", 0_RDONLY|O_CLOEXEC
<unfinished ...>
175226 <... rt_sigprocmask resumed>[], 8) = 0

```

```

175236 mmap(NULL, 134217728, PROT_NONE, MAP_PRIVATE|MAP_ANONYMOUS, -1, 0
<unfinished ...>

175237 <... openat resumed>)                = 3

175226 clone3({flags=CLONE_VM|CLONE_FS|CLONE_FILES|CLONE_SIGHAND|CLONE_THREAD|
CLONE_SYSVSEM|CLONE_SETTLS|CLONE_PARENT_SETTID|CLONE_CHILD_CLEARPID,
child_tid=0x7ec2e0c00990, parent_tid=0x7ec2e0c00990, exit_signal=0,
stack=0x7ec2e0400000, stack_size=0x7fff80, tls=0x7ec2e0c006c0} <unfinished ...>

175236 <... mmap resumed>)                  = 0x7ec2b0000000

175237 read(3, "0-11\n", 1024)              = 5

175236 munmap(0x7ec2b4000000, 67108864 <unfinished ...>

175226 <... clone3 resumed> => {parent_tid=[175238]}, 88) = 175238

175237 close(3 <unfinished ...>

175236 <... munmap resumed>)                = 0

175238 rseq(0x7ec2e0c00fe0, 0x20, 0, 0x53053053 <unfinished ...>

175236 mprotect(0x7ec2b0000000, 135168, PROT_READ|PROT_WRITE <unfinished ...>

175237 <... close resumed>)                  = 0

175226 rt_sigprocmask(SIG_SETMASK, [], <unfinished ...>

175238 <... rseq resumed>)                    = 0

175226 <... rt_sigprocmask resumed>NULL, 8) = 0

175237 mmap(0x7ec2b4000000, 67108864, PROT_NONE, MAP_PRIVATE|MAP_ANONYMOUS, -1,
0 <unfinished ...>

175226 futex(0x7ec2ebe00990, FUTEX_WAIT_BITSET|FUTEX_CLOCK_REALTIME, 175227,
NULL, FUTEX_BITSET_MATCH_ANY <unfinished ...>

175238 set_robust_list(0x7ec2e0c009a0, 24 <unfinished ...>

175237 <... mmap resumed>)                  = 0x7ec2ac000000

175238 <... set_robust_list resumed>)         = 0

175237 mprotect(0x7ec2ac000000, 135168, PROT_READ|PROT_WRITE <unfinished ...>

175238 rt_sigprocmask(SIG_SETMASK, [], <unfinished ...>

175237 <... mprotect resumed>)                = 0

175236 <... mprotect resumed>)                = 0

175238 <... rt_sigprocmask resumed>NULL, 8) = 0

175235 set_robust_list(0x7ec2e2a009a0, 24) = 0

175235 rt_sigprocmask(SIG_SETMASK, [], NULL, 8) = 0

175235 mmap(NULL, 134217728, PROT_NONE, MAP_PRIVATE|MAP_ANONYMOUS, -1, 0) =
0x7ec2a4000000

175235 munmap(0x7ec2a8000000, 67108864) = 0

```

```

175235 mprotect(0x7ec2a4000000, 135168, PROT_READ|PROT_WRITE) = 0
175238 mmap(0x7ec2a8000000, 67108864, PROT_NONE, MAP_PRIVATE|MAP_ANONYMOUS, -1,
0) = 0x7ec2a0000000
175238 mprotect(0x7ec2a0000000, 135168, PROT_READ|PROT_WRITE) = 0
175231 rt_sigprocmask(SIG_BLOCK, ~[RT_1], NULL, 8) = 0
175231 madvise(0x7ec2e8e00000, 8368128, MADV_DONTNEED) = 0
175231 exit(0)
= ?
175231 +++ exited with 0 +++
175234 rt_sigprocmask(SIG_BLOCK, ~[RT_1], NULL, 8) = 0
175234 madvise(0x7ec2e2c00000, 8368128, MADV_DONTNEED) = 0
175234 exit(0)
= ?
175234 +++ exited with 0 +++
175228 rt_sigprocmask(SIG_BLOCK, ~[RT_1], NULL, 8) = 0
175228 madvise(0x7ec2eac00000, 8368128, MADV_DONTNEED) = 0
175228 exit(0)
= ?
175228 +++ exited with 0 +++
175227 rt_sigprocmask(SIG_BLOCK, ~[RT_1], NULL, 8) = 0
175227 madvise(0x7ec2eb600000, 8368128, MADV_DONTNEED) = 0
175227 exit(0)
= ?
175227 +++ exited with 0 +++
175226 <... futex resumed>)
= 0
175226 futex(0x7ec2eaa00990, FUTEX_WAIT_BITSET|FUTEX_CLOCK_REALTIME, 175229,
NULL, FUTEX_BITSET_MATCH_ANY <unfinished ...>
175235 rt_sigprocmask(SIG_BLOCK, ~[RT_1], NULL, 8) = 0
175235 madvise(0x7ec2e2200000, 8368128, MADV_DONTNEED) = 0
175235 exit(0)
= ?
175235 +++ exited with 0 +++
175230 rt_sigprocmask(SIG_BLOCK, ~[RT_1], NULL, 8) = 0
175230 madvise(0x7ec2e9800000, 8368128, MADV_DONTNEED) = 0
175230 exit(0)
= ?
175230 +++ exited with 0 +++
175232 rt_sigprocmask(SIG_BLOCK, ~[RT_1], NULL, 8) = 0
175232 madvise(0x7ec2e8400000, 8368128, MADV_DONTNEED) = 0
175232 exit(0)
= ?

```

```

175232 +++ exited with 0 +++
175233 rt_sigprocmask(SIG_BLOCK, ~[RT_1], NULL, 8) = 0
175233 madvise(0x7ec2e3600000, 8368128, MADV_DONTNEED) = 0
175233 exit(0) = ?
175233 +++ exited with 0 +++
175236 rt_sigprocmask(SIG_BLOCK, ~[RT_1], NULL, 8) = 0
175236 madvise(0x7ec2e1800000, 8368128, MADV_DONTNEED) = 0
175236 exit(0) = ?
175236 +++ exited with 0 +++
175229 rt_sigprocmask(SIG_BLOCK, ~[RT_1], NULL, 8) = 0
175229 madvise(0x7ec2ea200000, 8368128, MADV_DONTNEED) = 0
175229 exit(0) = ?
175226 <... futex resumed>) = 0
175229 +++ exited with 0 +++
175226 munmap(0x7ec2eb600000, 8392704) = 0
175226 munmap(0x7ec2eac00000, 8392704) = 0
175226 munmap(0x7ec2ea200000, 8392704) = 0
175226 munmap(0x7ec2e9800000, 8392704) = 0
175226 munmap(0x7ec2e8e00000, 8392704) = 0
175226 munmap(0x7ec2e8400000, 8392704) = 0
175226 futex(0x7ec2e1600990, FUTEX_WAIT_BITSET|FUTEX_CLOCK_REALTIME, 175237,
NULL, FUTEX_BITSET_MATCH_ANY <unfinished ...>
175238 rt_sigprocmask(SIG_BLOCK, ~[RT_1], NULL, 8) = 0
175238 madvise(0x7ec2e0400000, 8368128, MADV_DONTNEED) = 0
175238 exit(0) = ?
175238 +++ exited with 0 +++
175237 rt_sigprocmask(SIG_BLOCK, ~[RT_1], NULL, 8) = 0
175237 madvise(0x7ec2e0e00000, 8368128, MADV_DONTNEED) = 0
175237 exit(0) = ?
175237 +++ exited with 0 +++
175226 <... futex resumed>) = 0
175226 munmap(0x7ec2e3600000, 8392704) = 0
175226 munmap(0x7ec2e2c00000, 8392704) = 0

```

```
175226 write(1, "== 235280 ==\n", 13)    = 13
175226 write(1, "== 0.235280 ==\n\n", 16) = 16
175226 exit_group(0)                      = ?
175226 +++ exited with 0 +++
```

Вывод

В ходе лабораторной работы я приобрел практические навыки в управлении потоков и обеспечении синхронизации между потоками. Составил и отладить программу на языке C++, осуществляющую работу с процессами и взаимодействие между ними в одной из двух операционных систем. Проблем в ходе выполнения не возникло.