



Python for Fixed Income

COURSE 1 · PYTHON FOUNDATIONS

Introduction to Python

WEEK 1 · DAY 1

Created by **Jeff Lenamon**

This course is educational content created in a personal capacity. Nothing here is investment advice or a recommendation to buy or sell any security. All portfolio data is synthetic.

By the end of today you can

Store a bond

Its ticker, coupon, price, and what you hold.

```
coupon = 5.25
```

Ask a portfolio questions

Totals, averages, highest and lowest.

```
sum(face_list)
```

Repeat a calculation

Once for every bond, without retyping it.

```
for price in price_list:
```

Write your own function

Define it once. Use it anywhere.

```
def current_yield(coupon, price):
```

One desk, four bonds

Ticker	Issuer	Coupon	Price	Rating
QVNE	Quorvane Energy	5.25	98.50	BBB
DNMR	Dunmarrow Rail	6.125	103.25	BB+
PLWK	Pellwick Paper	4.75	95.00	A-
HLVF	Halvering Foods	7.50	101.00	B+

Every issuer in this course is invented.

How every notebook works

Q.

A question the desk would ask



Code

A few lines that answer it



Takeaway

What the output tells us

A variable is a name for a value

Name on the left, value on the right

```
ticker = 'QVNE'  
coupon = 5.25  
maturity = 2033  
price = 98.50
```

From then on, use the name and Python fills in the value.

Four kinds of value

str

Text, always in quotes

'QVNE'

float

A number with a decimal point

5.25

int

A whole number

2033

bool

True or False

True

Percent means divide by 100

Right

```
annual_income = face * coupon / 100  
$52,500.00
```

Wrong, and Python raises no error

```
annual_income = face * coupon  
$5,250,000.00
```

Know roughly what the answer should be before you run it.

Mars Climate Orbiter, 1999

A ground software file supplied thruster data in English units. The trajectory models expected metric.

Both numbers were valid. The units did not match. Nothing raised an error.

The spacecraft arrived about 170 kilometers lower than planned.

Source: Mars Climate Orbiter Mishap Investigation Board, Phase I Report, November 10, 1999.

Format codes, and how a notebook runs

An f-string format code changes what is shown, not the value

Python	Excel	Shows
<code>f'{annual_income:,.2f}'</code>	<code>=TEXT(A1,"#,##0.00")</code>	52,500.00
<code>f'{price:.2f}'</code>	<code>=TEXT(A1,"0.00")</code>	98.50
<code>f'{coupon:.3f}'</code>	<code>=TEXT(A1,"0.000")</code>	5.250
<code>f'{0.0525:.2%}'</code>	<code>=TEXT(A1,"0.00%")</code>	5.25%

In Excel

A format code is Excel's number format. TEXT() builds text from a number, and & joins the pieces. An f-string does both in one line.

How a notebook runs

A value, not a formula

cost stays 985,000.00 when face changes.
Excel recalculates. Python never does.

Run from top to bottom

Each cell relies on the cells above it. Run a cell twice and its work is done twice.

When in doubt, start again

Restart clears what Python remembers. Run All runs every cell in order.

Three ways to hold more than one value

List

[]

One column of a sheet. Ordered, and it can be changed.

```
coupon_list =  
    [5.25, 6.125, 4.75, 7.5]
```

A column

Tuple

()

Like a list, but it cannot be changed after it is made.

```
frequencies = (1, 2, 4)
```

Something fixed

Dictionary


{ }

One row of a sheet. Each value has a name, called a key.

```
bond = {'Ticker': 'QVNE',  
        'Coupon': 5.25}
```

A record

Python counts from zero

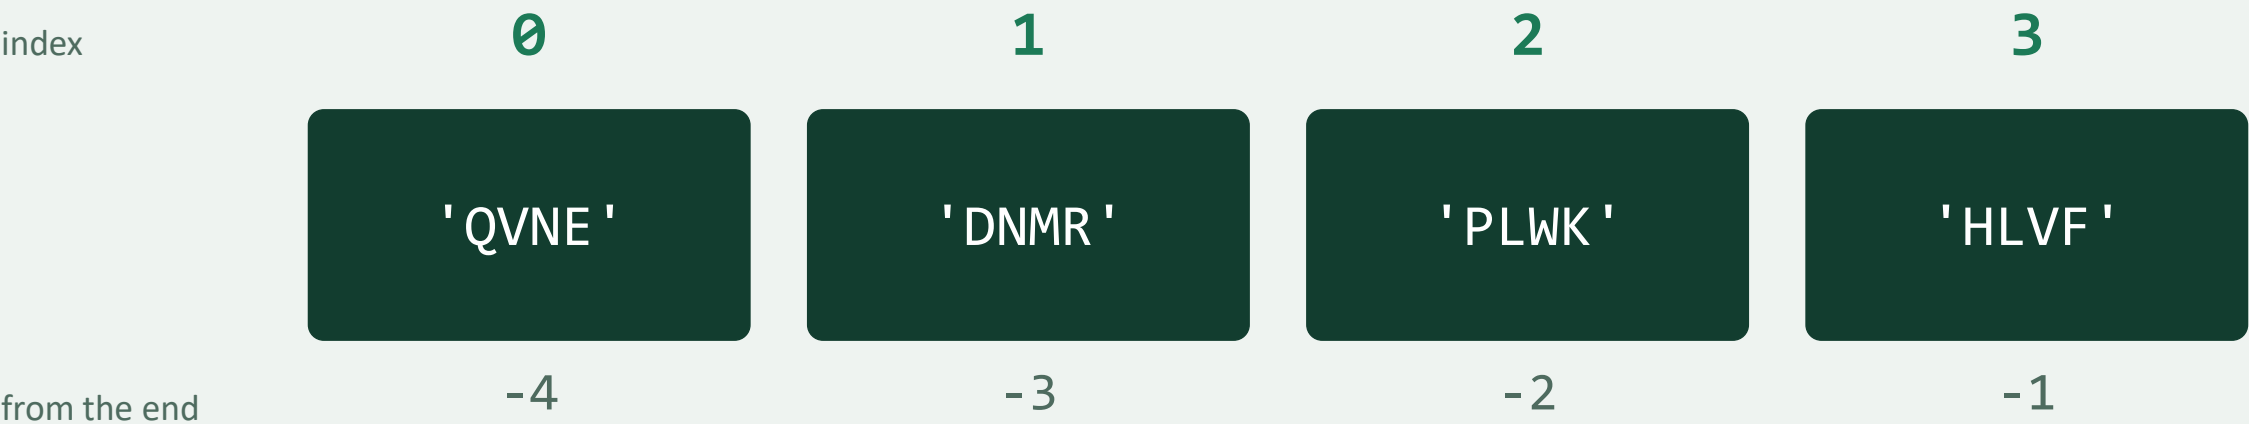

The first item is index 0. The last item is always index -1.

Python	<code>len(list)</code>	<code>sum(list)</code>	<code>min(list)</code>	<code>max(list)</code>
Excel	COUNTA	SUM	MIN	MAX

Strings, and the operators that compare

A string works like a list of characters

Python	Excel
<code>len(cusip)</code>	<code>=LEN(A1)</code>
<code>cusip[:6]</code>	<code>=LEFT(A1,6)</code>
<code>cusip[6:8]</code>	<code>=MID(A1,7,2)</code>
<code>cusip[-1]</code>	<code>=RIGHT(A1,1)</code>
<code>rating_text.strip()</code>	<code>=TRIM(A1)</code>
<code>rating_text.strip().upper()</code>	<code>=UPPER(TRIM(A1))</code>
<code>face_text.replace(',', '')</code>	<code>=SUBSTITUTE(A1,",","")</code>


`cusip` is '99012QAB6'. `MID` counts from 1, so its 7 is Python's index 6.

Operators for the next section

Python	Meaning	Excel
<code>==</code>	equal to	<code>=</code>
<code>!=</code>	not equal to	<code><></code>
<code><</code> <code><=</code>	less than, or equal to	<code><</code> <code><=</code>
<code>></code> <code>>=</code>	greater than, or equal to	<code>></code> <code>>=</code>
<code>in</code> , <code>not in</code>	one of the items, or not	<code>COUNTIF</code> (below)
<code>and</code>	both sides are true	<code>=AND(A1>10,B1>100)</code>
<code>or</code>	at least one side is true	<code>=OR(A1<=10,B1>100)</code>
<code>not</code>	flips True and False	<code>=NOT(A1<=10)</code>

`'DNMR' in ticker_list` is `=COUNTIF(A1:A4,"DNMR")>0`

Making a decision

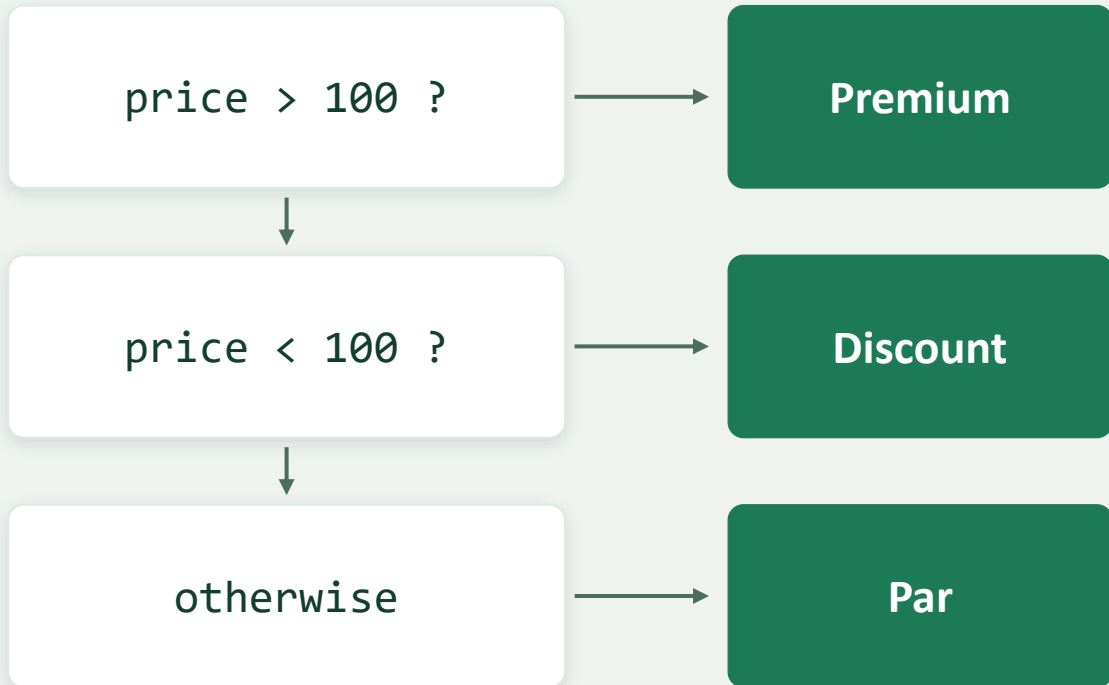

```
if price > 100:  
    print('Premium')  
elif price < 100:  
    print('Discount')  
else:  
    print('Par')
```

Each test ends with a colon. The indented lines belong to it.

In Excel =IF(A1>100,"Premium",IF(A1<100,"Discount","Par"))

A loop is the fill-down

In Excel: one formula, dragged down the column

Face	Price	Cost
1,500,000	98.50	=A2*B2/100
500,000	103.25	=A3*B3/100
750,000	95.00	=A4*B4/100
250,000	101.00	=A5*B5/100

In Python: one formula, applied to every row

```
for ticker, face, price in zip(ticker_list,
                               face_list,
                               price_list):
    cost = face * price / 100
    print(f'{ticker} cost ${cost:,.2f}')
QVNE cost $1,477,500.00
```

The running total

Start at zero, before the loop



Add to it, inside the loop



Read the answer, after the loop

The same loop in one line

As a loop

```
income_list = []
for face, coupon in pairs:
    income = face * coupon / 100
    income_list.append(income)
```

As a list comprehension

```
income_list = [
    face * coupon / 100
    for face, coupon in pairs
]
```

[]

The brackets say: build a list

face * coupon / 100

The calculation for each item

for face, coupon in pairs

Where the items come from

Writing your own function

```
def current_yield(coupon, price):  
    """  
    Take the coupon (in percent) and the price  
    and return the current yield in percent.  
    """  
    return coupon / price * 100
```

def and a name

Starts the definition. The name is how you call it.

Parameters

The names in the brackets that stand for inputs.

Docstring

Says what goes in and comes out. `help()` shows it.

return

Hands the answer back.

print

Shows the value on screen. Then it is gone.

return

Hands the value back, so you can use it next.

Defaults, sorting, and three reading notes

A default in the def line, a keyword argument in the call

```
def total_income(incomes, months=12):  
    total = sum(incomes)  
    return total * months / 12  
  
total_income(income_list)  
Income for a full year: $163,750.00  
total_income(income_list, months=6)  
Income for six months: $81,875.00
```

Sorting by a value you choose

```
sorted(holdings, key=price_of, reverse=True)  
DNMR, HLVF, QVNE, PLWK: highest price first
```

Three things to recognize in other people's code

key=lambda holding: holding['Price']

lambda: a one-line function with no name. Take a holding, hand back its price.

def add_face(*positions):

One star: any number of values, arriving as a tuple. Usually written *args.

def net_cash(income, **other_cash):

Two stars: any number of named values, arriving as a dictionary. Usually written **kwargs.

Working with an AI assistant

What you type into an AI tool or upload to a cloud notebook leaves your machine. A stricter firm policy wins.

Never put into an AI tool or a cloud notebook	Fine to use
Client and counterparty names	The synthetic data in this course
Positions, holdings, and trades	Public data, such as published Treasury yields
Anything from your employer: files, code, emails	Code you wrote yourself on that data
Passwords, keys, and other credentials	

How to ask

Say what you have, what you want, and the units.

*I have a list of face amounts in dollars and a list of prices per 100 of face.
Write a loop that totals the cost in dollars.*

How to read what comes back

Read. Predict. Run. Check.

Code that runs without an error can still be wrong. The last exercise of every notebook is an AI check.

What you can do now

- Store a bond in variables and calculate with it
- Hold a portfolio in lists and dictionaries, and total it
- Label a bond as premium or discount, investment grade or high yield
- Repeat a calculation across every position with a loop
- Write a function and use it again and again

Tomorrow Files and Folders: filing, opening, and reading the desk's daily holdings file