



Python for Fixed Income

COURSE 1 · PYTHON FOUNDATIONS

NumPy

WEEK 2 · DAY 1

Created by **Jeff Lenamon**

This course is educational content created in a personal capacity. Nothing here is investment advice or a recommendation to buy or sell any security. All portfolio data is synthetic.

By the end of today you can

Calculate on a whole column

Cost, income, and current yield for every bond.

```
costs = faces * prices / 100
```

Summarize a portfolio

Totals, averages, and a face-weighted average.

```
np.average(coupons, weights=faces)
```

Select by a condition

Below par, high yield, premium or discount.

```
tickers[prices < 100]
```

Price a bond from its cash flows

Under simple assumptions, stated plainly.

```
(cash_flows * discount_factors).sum()
```

Week 2: the same four bonds, a new tool

The desk's four bonds, unchanged from week 1

Ticker	Coupon	Price	Score	Face held
QVNE	5.25	98.50	9	1,500,000
DNMR	6.125	103.25	11	500,000
PLWK	4.75	95.00	7	750,000
HLVF	7.50	101.00	14	250,000

Where lists run out: face times price

```
face_list * price_list
TypeError: can't multiply sequence
by non-int of type 'list'
```

A list holds numbers. It does not do arithmetic with them.

Week 1: a list and a loop

Four lines to say face times price over 100.



Today: a NumPy array

One line for the whole column.



Tomorrow: pandas

Built on top of NumPy.

A list repeats. An array calculates.

A list: * means repeat. No error, nothing doubled.

```
print(price_list * 2)
[98.5, 103.25, 95.0, 101.0,
 98.5, 103.25, 95.0, 101.0]
```

import numpy as np

Loads the library and gives it a short name. Everyone who uses NumPy calls it np.

An array: * means multiply, bond by bond.

```
faces = np.array(face_list)
prices = np.array(price_list)
costs = faces * prices / 100
print(costs)
[1477500.  516250.  712500.  252500.]
```

In Excel

=B2*C2/100 filled down four rows

=B2:B5*C2:C5/100 typed once, spills down

One array, one type

An array holds one type only, stored in dtype

Array	dtype	What it holds
coupons	float64	Numbers with a decimal point
faces	int64	Whole numbers
tickers	<U4	Text of up to 4 characters

Mix the types, and everything becomes text

```
mixed = np.array(['QVNE', 5.25])
print(mixed)
['QVNE' '5.25']
```

Arrays built from a pattern, with no list

Function	What it builds
<code>np.arange(95, 106, 1)</code>	95 to 105. The stop is left out.
<code>np.linspace(0.5, 7, 14)</code>	14 even steps. Both ends included.
<code>np.zeros(4)</code>	Four zeros, to fill in later
<code>np.ones(4) * 100</code>	A constant column of 100

Know the step: arange. Know the count: linspace.
A step with a decimal point? Prefer `np.linspace()`.

One line, every bond

	QVNE	DNMR	PLWK	HLVF
faces	1,500,000	500,000	750,000	250,000
* prices	98.5	103.25	95.0	101.0
	↓	↓	↓	↓
/ 100 = costs	1,477,500	516,250	712,500	252,500

```
costs = faces * prices / 100
print('Total cost:', costs.sum())
Total cost: 2958750.0
```

Python	Excel
faces * prices / 100	=B2*C2/100 filled down
(faces * prices / 100).sum()	=SUMPRODUCT(B2:B5, C2:C5)/100

Two averages, two different numbers

Each box is one bond, as wide as its share of the 3,000,000 of face: ticker, coupon, face held

QVNE 5.25 1,500,000	DNMR 6.125 500,000	PLWK 4.75 750,000	HLVF 7.5 250,000
--	---	--	---

Simple average 5.90625 Every bond counts the same. <code>np.mean(coupons)</code>	Face-weighted average 5.458 163,750 of coupon on 3,000,000 of face. <code>np.average(coupons, weights=faces)</code>
--	---

	Simple	Face-weighted
In Excel	=AVERAGE(D2:D5)	=SUMPRODUCT(D2:D5, B2:B5)/SUM(B2:B5)

Two habits: `np.isclose()` and `.copy()`

6.4 Decimals: compare with `np.isclose()`, not `==`

```
colleague_yields = coupons * 100 / prices
print(current_yields == colleague_yields)
[ True  True  True False]
print(np.isclose(current_yields,
                  colleague_yields))
[ True  True  True  True]
```

The two HLVF yields differ in the 15th decimal place. Both are 7.43 percent, and `==` still says False.

In Excel `=ABS(F2-G2)<0.000001` in place of `=F2=G2`

6.5 A slice of an array is a window, not a copy

```
first_two = prices[0:2]
first_two[0] = 0
print(prices)
[ 0.  103.25  95.  101. ]

first_two_copy = prices[0:2].copy()
```

The change to the slice landed on prices, with no warning. A change to the copy stays in the copy.

A slice of a list is a new list. For an array: slice, then `.copy()`.

A mask selects by condition, not by position

prices

QVNE
98.5

DNMR
103.25

PLWK
95.0

HLVF
101.0

prices < 100
the boolean mask

True

False

True

False

tickers[below_par]

'QVNE '

'PLWK '

Count and total (COUNTIF, SUMIF)

```
below_par.sum()  
2  
faces[below_par].sum()  
2250000
```

Combine conditions with & and |

```
tickers[(scores >= 11)  
        & (prices > 102)]  
['DNMR']
```

Label every bond (IF, filled down)

```
np.where(prices > 100,  
        'Premium', 'Discount')
```

A table in one array: rows first, then columns

bond_table has shape (4, 3): 4 rows and 3 columns

Two indexes: row, then column

axis=0



row	0: coupon	1: price	2: face
0 QVNE	5.25	98.5	1500000
1 DNMR	6.125	103.25	500000
2 PLWK	4.75	95.0	750000
3 HLVF	7.5	101.0	250000

axis=1



```
print(bond_table[1, 1])  
103.25  
print(bond_table[:, 1])  
[ 98.5  103.25  95.   101. ]
```

axis=0

Down the rows. One result per column.

In Excel, a SUM at the bottom of each column.

axis=1

Across the columns. One result per row.

In Excel, a SUM at the end of each row.

Cash flows times discount factors, summed

	period 1	period 2	period 3	...	period 14	
cash_flows	2.625	2.625	2.625	...	102.625	
* discount_factors	0.9732	0.9471	0.9217	...	0.6835	
= present_values	2.5546	2.4861	2.4195	...	70.1474	→ present_values.sum() SUMPRODUCT in Excel
						98.5067


Three assumptions, stated plainly

Whole periods. Semiannual compounding. Settlement on a coupon date.

The full treatment belongs to the Bond Math course.


```
present_values = cash_flows * discount_factors
qvne_price = present_values.sum()
Price of QVNE at a yield of 5.51 percent: 98.5067
```

Save it, load it, check it

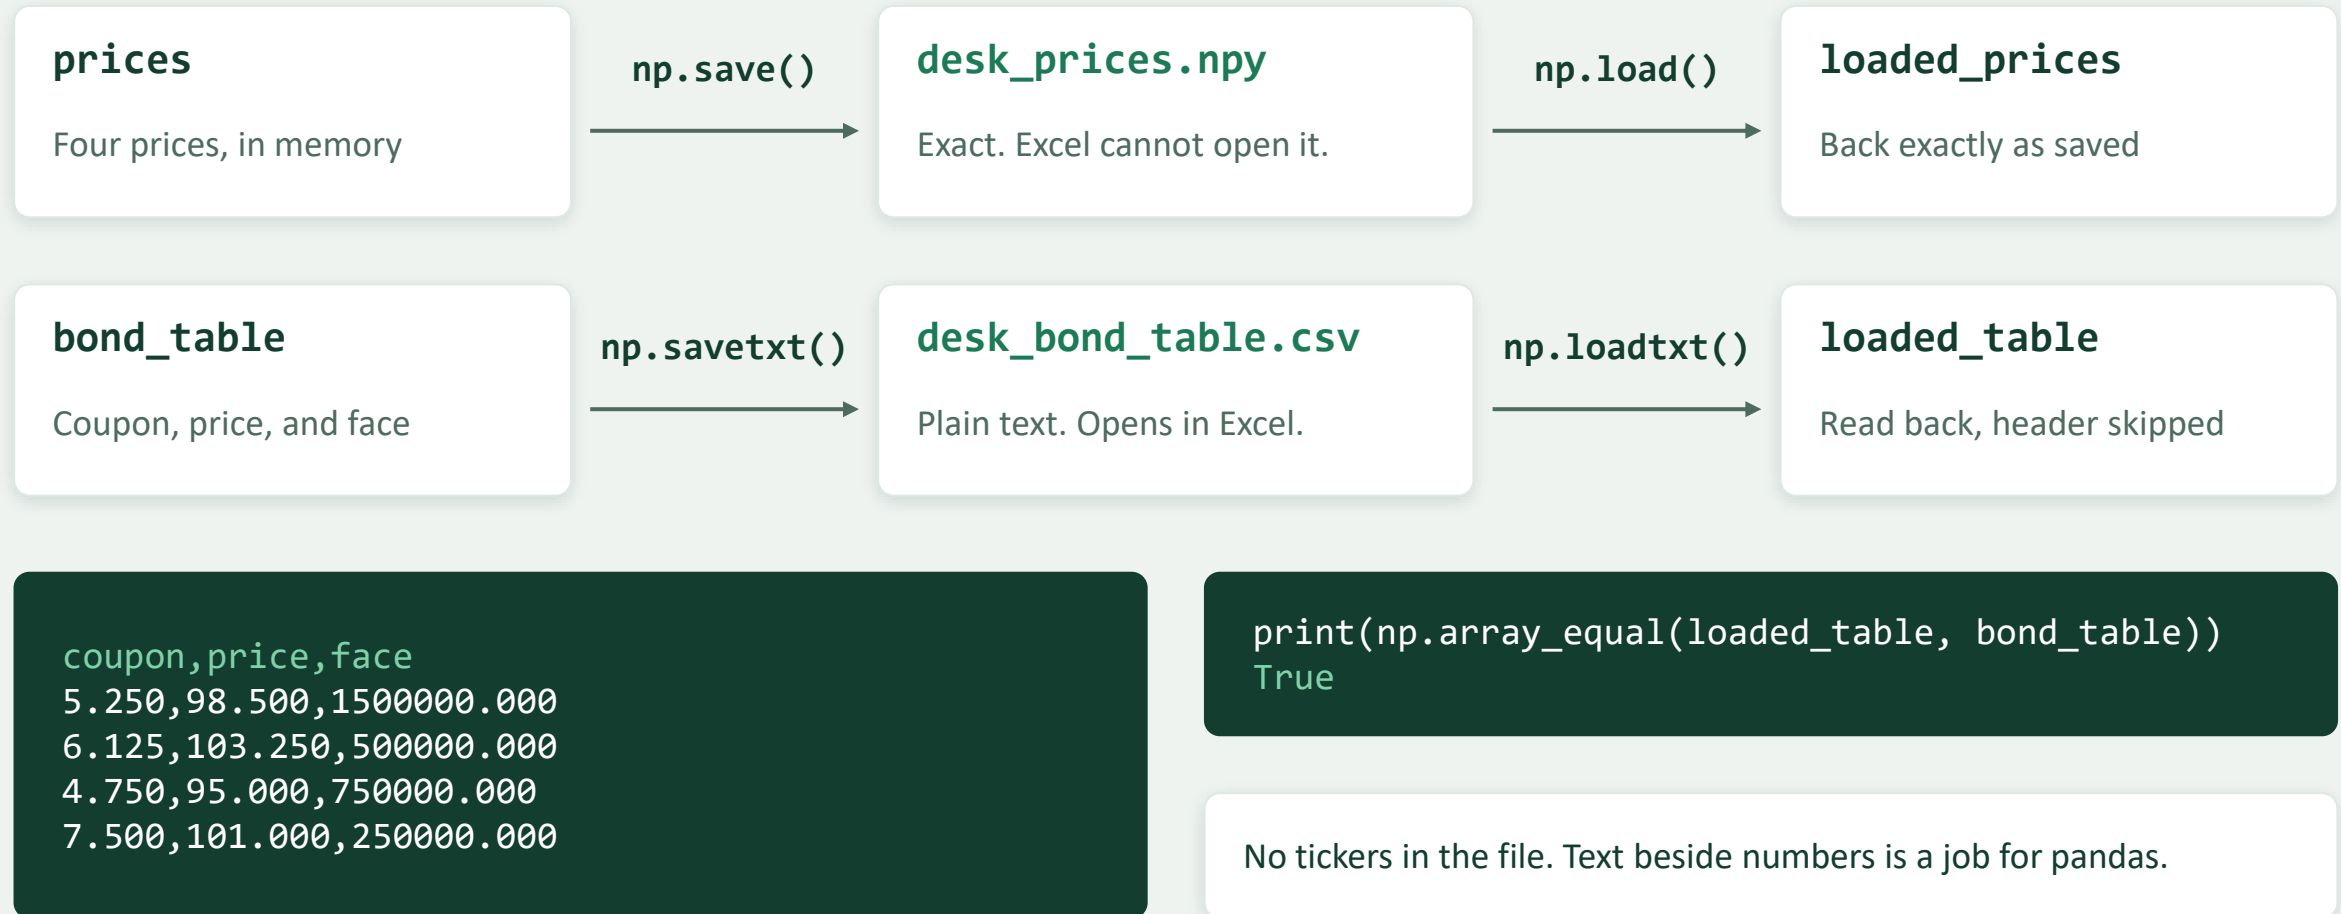

The AI check

Every notebook ends with code written in the style of an AI assistant. It has one bug. Find it.

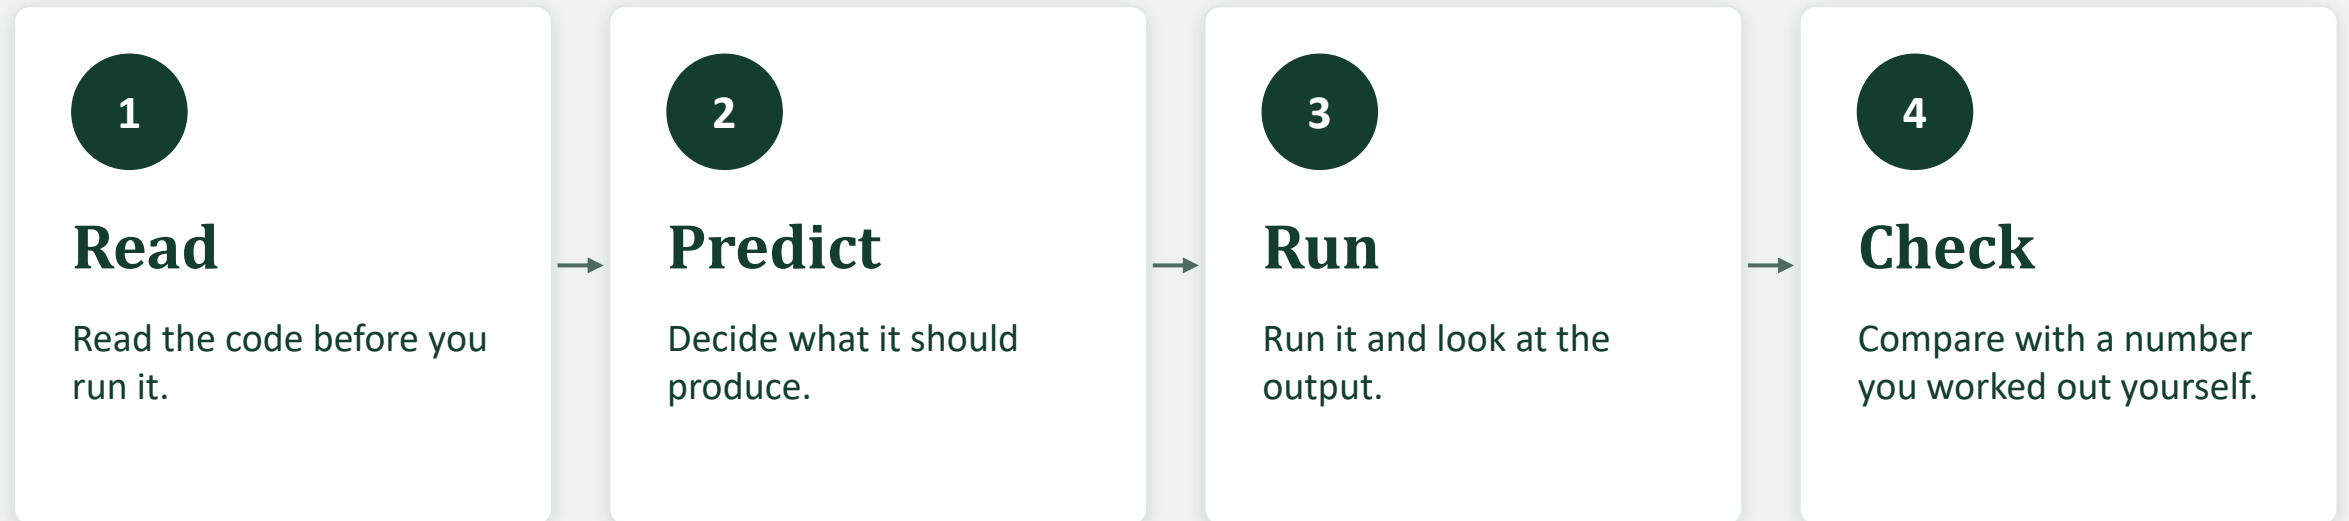

Code that runs is not the same as code that is right.

What you can do now

- Calculate cost, income, and current yield for every bond in one line
- Summarize a portfolio, and compare decimal results with `np.isclose()`
- Pick out bonds by a condition and label them with `np.where()`
- Price a bond from its cash flows and discount factors
- Save an array to a file, load it back, and check it arrived intact

Tomorrow pandas: Series and DataFrames, and the portfolio grows to two hundred bonds