pfi

Python for Fixed Income

COURSE 7 · NLP, RAG, AND LLMS

Bag of Words and TF-IDF

WEEK 1 · DAY 2

Created by **Jeff Lenamon**

This course is educational content created in a personal capacity. Nothing here is investment advice or a recommendation to buy or sell any security. All portfolio data is synthetic.

From tokens to numbers

1. Count

Bag of words: one row per document, one column per token

2. Weight

TF-IDF: each count times how rare the word is

3. Compare

Cosine similarity: one number for two documents

```
textkit.term_counts(docs)          textkit.idf(doc_freq, n_docs)
textkit.tfidf_by_hand(counts)      textkit.cosine_similarity_matrix(A, B)
```

Each one tested against scikit-learn to 1e-12, on 226 statements and Article 4.

Real documents, described

An FOMC statement's output

Allowed names	Never called
count of words from the course's list	hawkish or dovish
dictionary score	a signal or a policy view
the action the statement states	a forecast of rates

An indenture's terms

Allowed names	Never called
the indenture states	loose, tight, weak, strong
extracted value, with its quote	covenant-lite or protective
passed the source check	a credit view or recommendation

Bag of words

226


rows: one per statement

1,686

columns: one per distinct token

0.0983

share of the table not 0

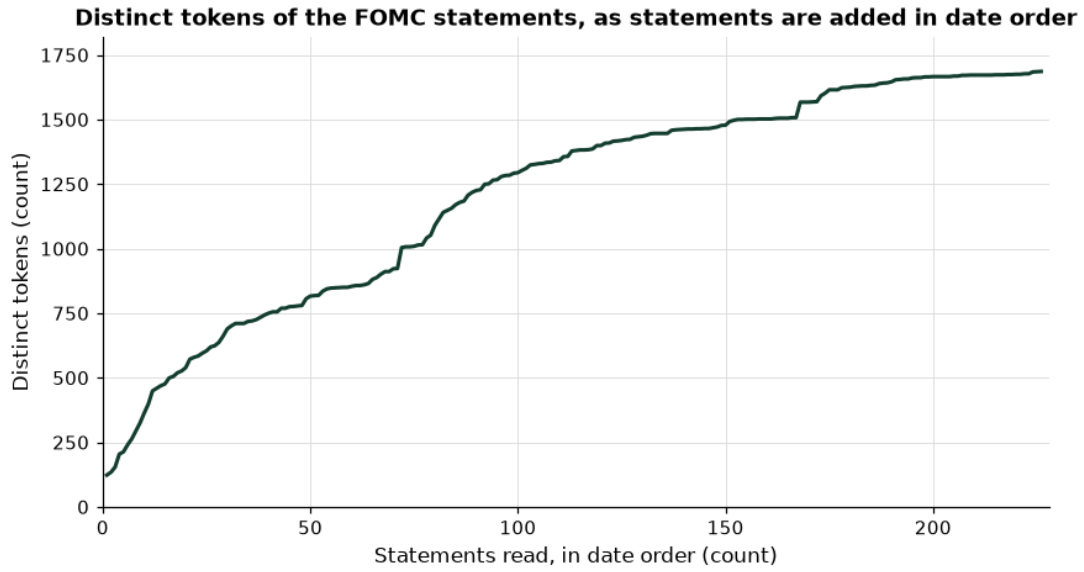


The raw text gives four other columns


Only after normalize_text: and-in, banks-the. Only on the raw text: s, survey.

816 tokens after 50 statements, 1,294 after 100, 1,686 after all. 212 vote paragraphs left out first.

Document frequency and IDF

```
idf = ln((1 + n) / (1 + df)) + 1          # scikit-learn's smooth_idf, the default
```

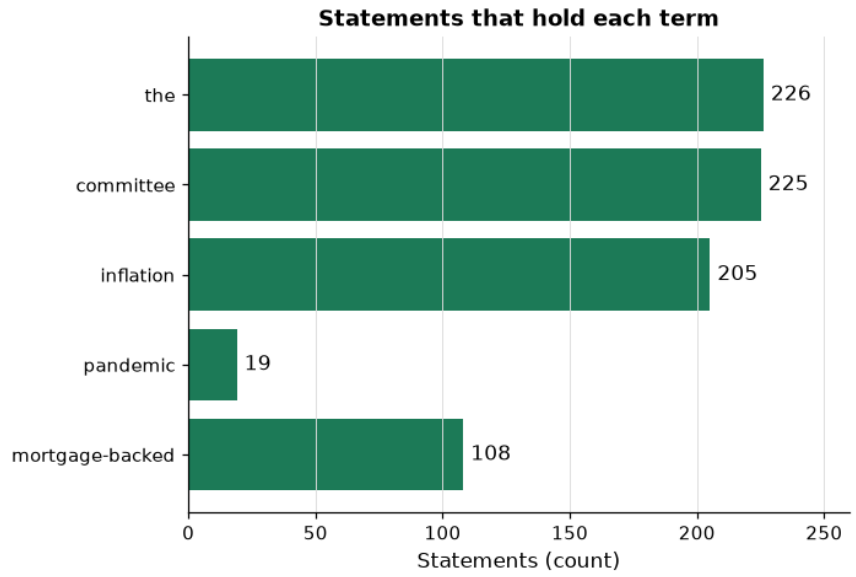

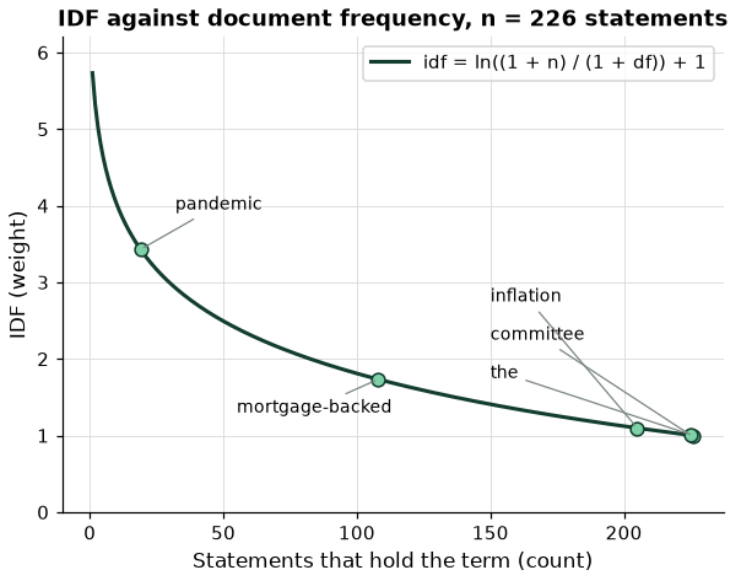

The two ends

In every statement (5 tokens): weight 1.0, never 0. In one only (404 tokens): the largest. pandemic, in 19: 3.4292.

A paper on term specificity


January 1972

Karen Sparck Jones, "A statistical interpretation of term specificity and its application in retrieval", Journal of Documentation, volume 28, issue 1, pages 11 to 21.

The course takes the record's facts only. The paper itself was not read for this course.


Source, read 8 October 2026: the Crossref record, api.crossref.org/works/10.1108/eb026526 (DOI 10.1108/eb026526)

TF-IDF by hand: the first statement three ways

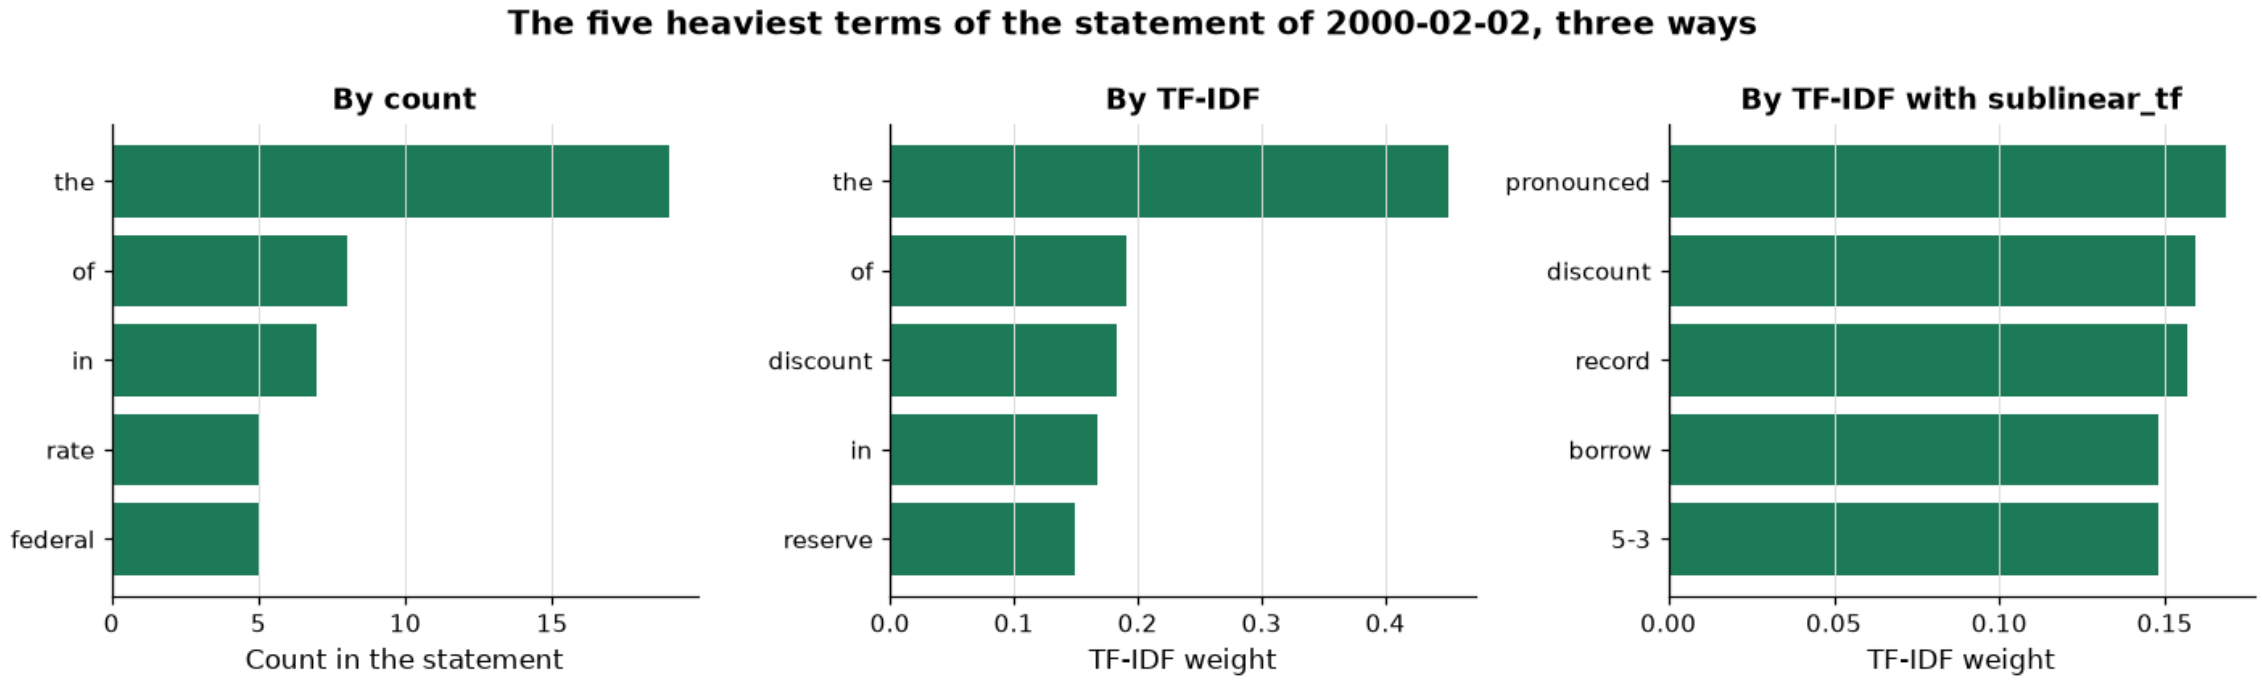

"the" 19 times leads by count and by plain TF-IDF. With 1 + ln(tf), "pronounced" leads. Rows of length 1, equal to TfidfVectorizer within 1e-12.

One setting at a time

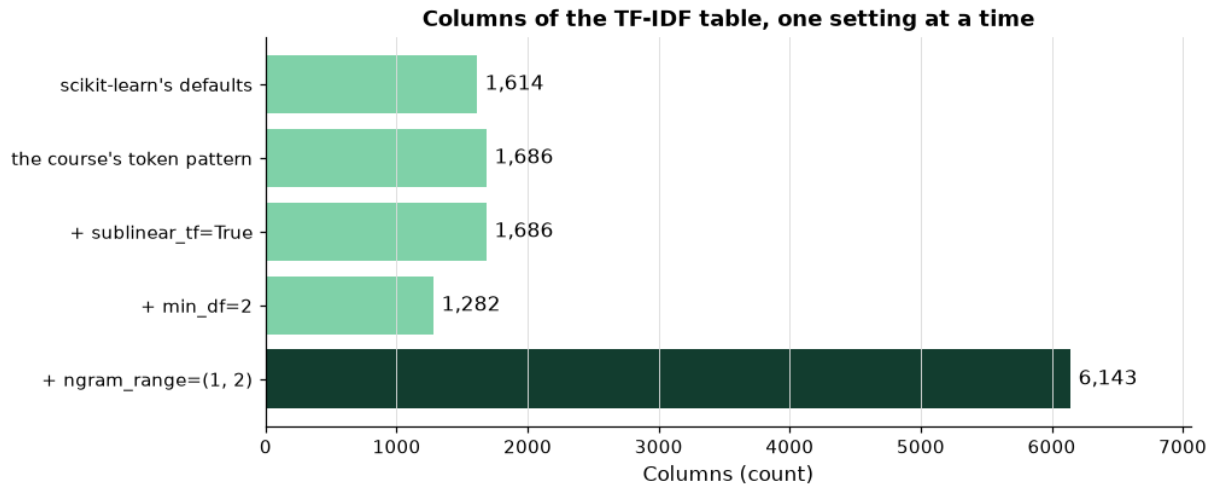


What each one changes

Default pattern: splits at hyphens, drops one-character tokens. Sublinear: weights only. min_df=2: drops terms in one statement. Bigrams: pairs of neighbours.

From 1,614 columns with the defaults to 6,143 with the course's setting, the dark bar.

Cosine similarity

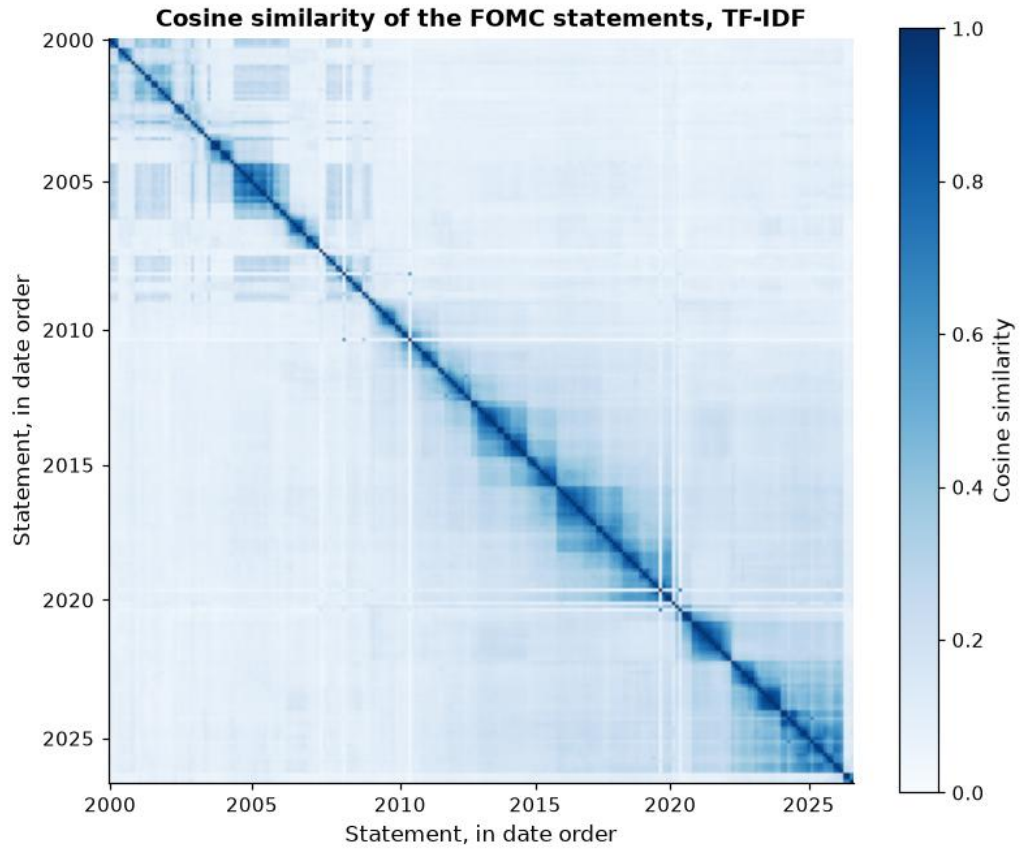

With the course's setting

Most alike: 2024-01-31, 2024-03-20 0.9699

Least alike: 2004-03-16, 2010-05-09 0.0241


Median with the next statement: 0.7731

Median of all pairs: 0.1129

Least like the rest: 3 unscheduled releases

A cosine measures shared words. It is not a probability.

A statement and the next one

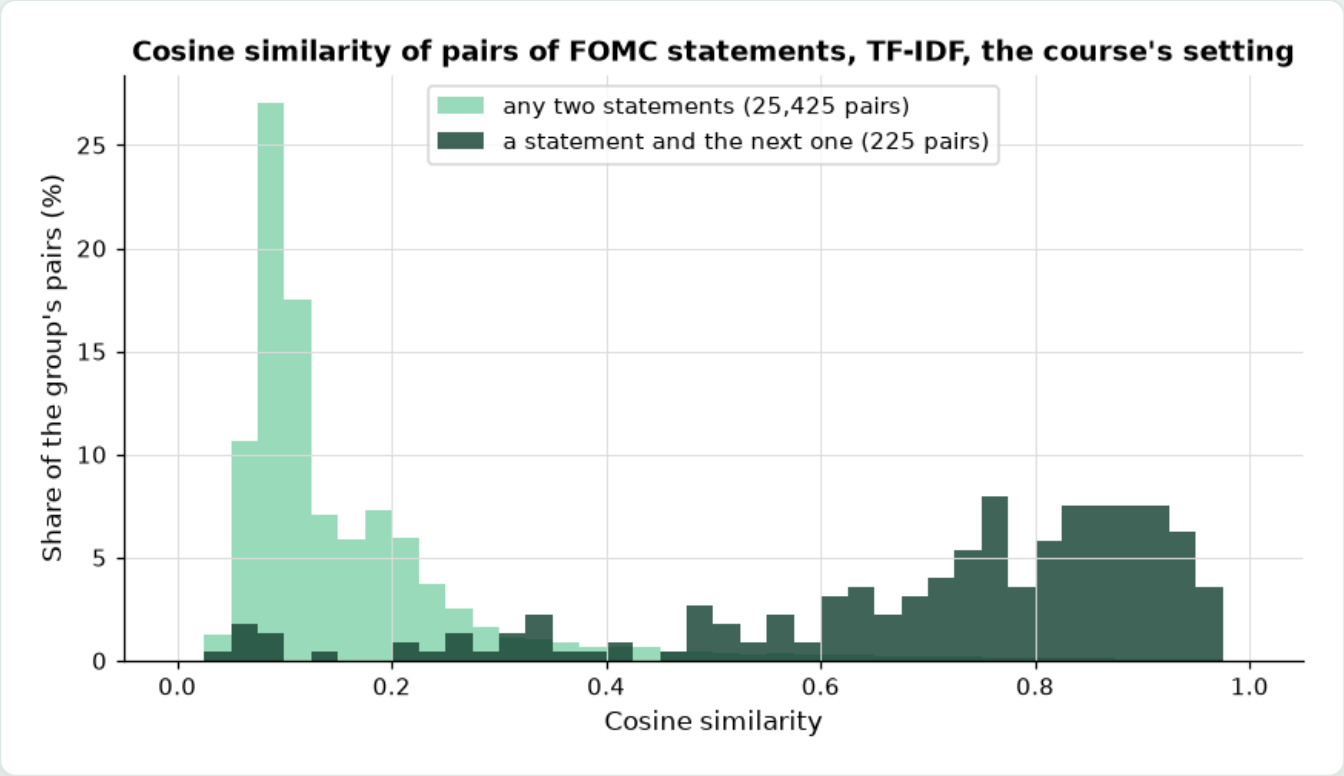

	Any two	The next one
Pairs	25,425	225
10th percentile	0.0731	0.3434
Median	0.1129	0.7731
90th percentile	0.2913	0.9239

Two humps, far apart: wording carries over from one statement to the next.

Distinctive terms by year

Year	The three most distinctive terms
2008	to growth, housing contraction, labor markets
2013	asset, purchases, a highly
2014	asset, asset purchase, purchase program
2021	by at, percent for, on vaccinations
2022	war, demand imbalances, imbalances related
2026	at 3-1, 3-3, 3-3 4

How it is computed

Mean TF-IDF in the year's statements minus the mean in all others; the three largest, ties by term.

Words the statements wrote in those years, nothing more. 3-3 is 3-3/4 cut at the slash.

Article 4 as twenty documents

9 of 20

sections that hold "indebtedness"

1.7419

its idf (the largest possible: 3.3514)

67

times in 4.12, the most of any section


Section	and	Cosine
4.10	4.11	0.5688
4.12	4.15	0.5330
4.12	4.16	0.4663

What 4.10 and 4.11 share most

offer, notes or, or portions, portions: each section sets out an offer to the holders.


Source: Boyd Gaming Corporation, indenture for the 4.750% Senior Notes due 2031, Exhibit 4.1 to the 8-K filed 2021-06-08, accession 0001193125-21-185495.

Indebtedness, section by section

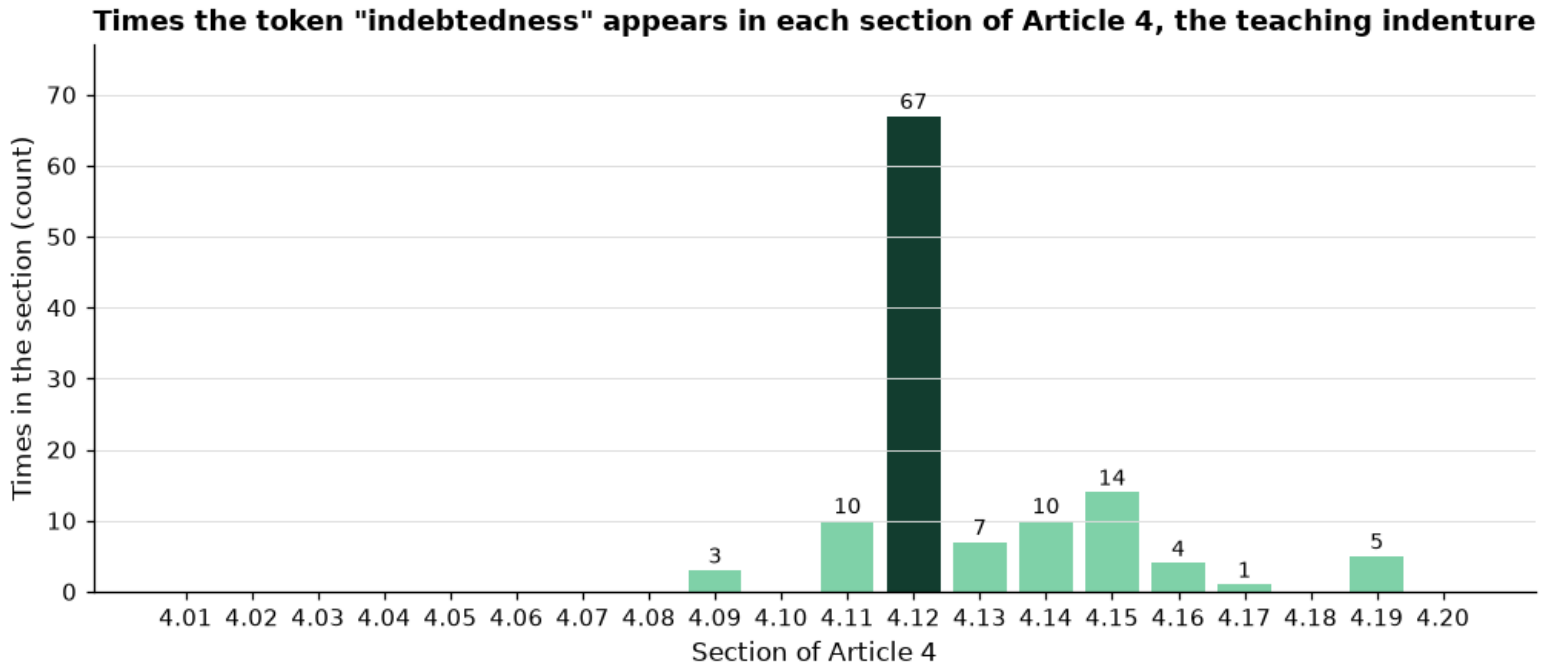

67 times in 4.12. The idf is the same in every section: the count makes 4.12's weight the largest.

Every pair of sections

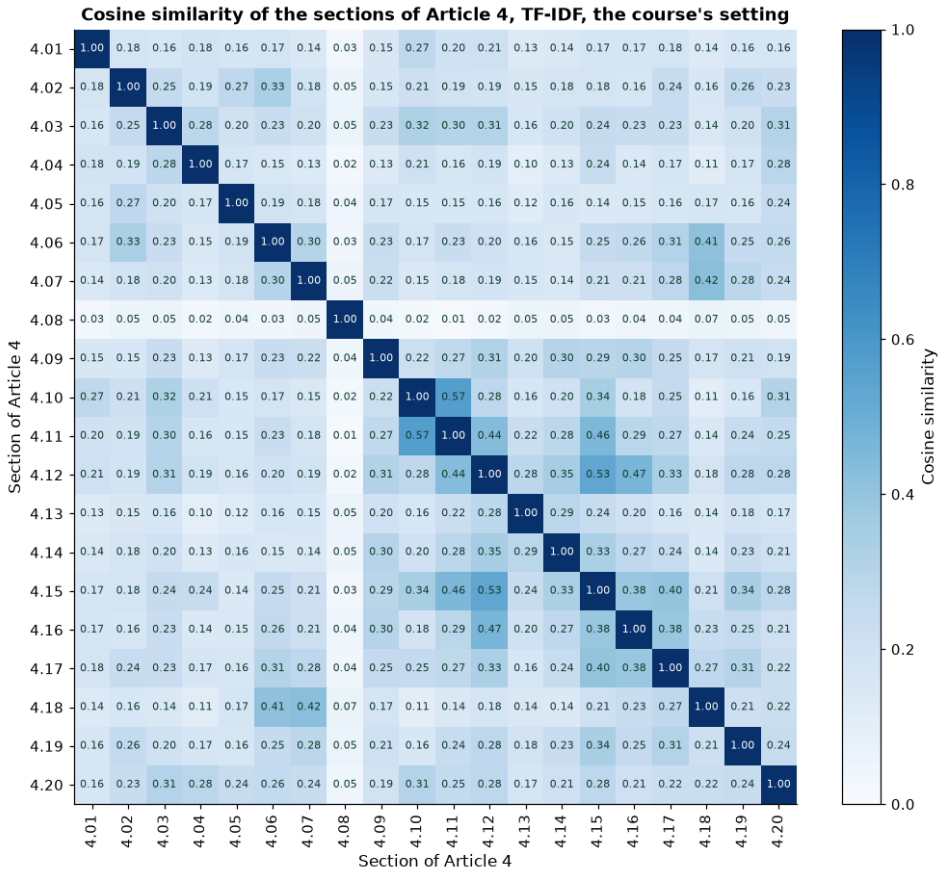


The five most alike pairs

4.10 and 4.11	0.5688
4.12 and 4.15	0.5330
4.12 and 4.16	0.4663
4.11 and 4.15	0.4554
4.11 and 4.12	0.4353

All five sit among 4.10 to 4.16. 4.08, reserved, is pale all the way across. Shared wording, nothing more.

Each section's own word

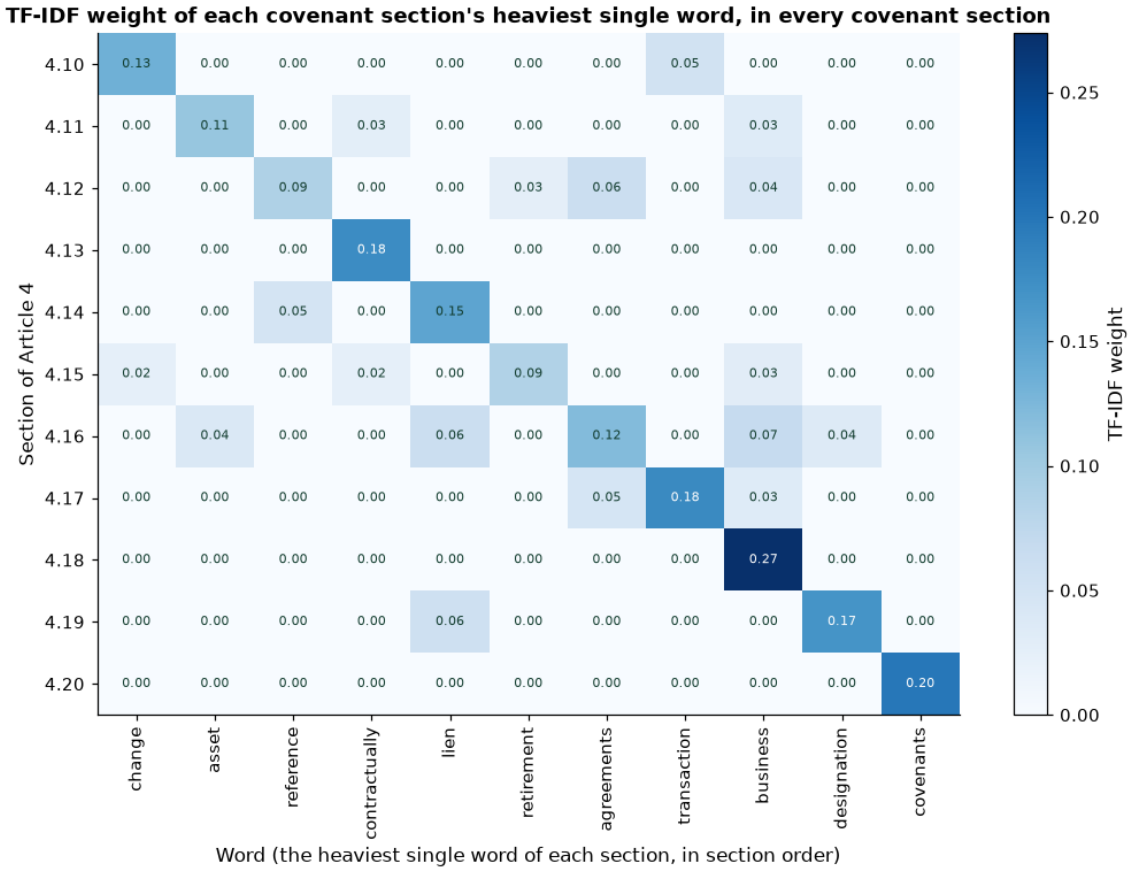

A document-by-term table

Rows: sections 4.10 to 4.20. Columns: each section's heaviest single word. Cells: its weight.

Each word weighs most in its own section; 93 of the 121 cells are 0.

What a bag of words loses

```
Leverage is less than 3.0 and coverage is not less than 2.0.
Leverage is not less than 3.0 and coverage is less than 2.0.
```

1.0000

cosine as bags of words

1.0000

with bigrams too

0.9512

with trigrams

Same words, opposite tests. A bag of words indexes what a text is about, not what it says.

Excel side by side

Excel side by side (tested in Excel)

`=COUNTIF(A2:A227,"*inflation*")`	205, as Python
`=COUNTIF(A2:A227,REPT("a",256))`	#VALUE!; 255: 0
`=LN((1+226)/(1+J2))+1`	within 1e-12 (123)
`=I2*K2`	TF times IDF
`=L2/SQRT(SUMSQ(L$2:L$124))`	within 1e-12
`=SUMPRODUCT(P1:P6143,Q1:Q6143)/(SQRT(SUMSQ(P1:P6143))*SQRT(SUMSQ(Q1:Q6143)))`	0.9699

No tokenizer and no TF-IDF in Excel: once the counts exist, it checks every step after them.

Save the day: read the diff

1. Morning

Commit textkit as day 1 left it

2. Lesson

Four functions, four appends

3. Diff

2 files, 150 lines added, none removed

4. Commit

Today's two files

```
174bf98 Add term_counts, idf, tfidf_by_hand, cosine_similarity_matrix, 14 tests
2e635be Start of day 2: textkit as day 1 left it, 7 tests
```

pytest: 14 passed. Fragments only append: a minus line is the first thing to read.

The AI check

The docstring is the prompt. The code that comes back runs, and its number looks fine.

1

Docstring

Units, conventions, and what the function must never do: what you asked for.

→

2

Code back

Written for the course in the style of an AI answer. Read it.

→

3

Test first

Assert what the docstring promises. Run it: it fails.

→

4

Fix

Find the rule it broke, fix it, run the test again.

Today: IDF as log10(n / df): 5 terms weigh 0, and the top term moves from "the" to "pronounced".

Code that runs is not the same as code that is right.

What you can do now

- Count tokens into a bag of words, by hand and with CountVectorizer
- Compute scikit-learn's smooth IDF and TF-IDF by hand, to 1e-12
- Measure how alike two documents are with a cosine
- Find what sets a year, or a covenant section, apart
- Do every step after the counts in Excel

Week 1, Day 3 Classifying 8-K items with TF-IDF