



Python for Fixed Income

COURSE 6 · NEURAL NETWORKS

Windows and Walk-Forward on the Yield Curve

WEEK 3 · DAY 1

Created by **Jeff Lenamon**

This course is educational content created in a personal capacity. Nothing here is investment advice or a recommendation to buy or sell any security. All portfolio data is synthetic.

The sequence model, framed

The question, in the past tense

For each date in the development years: how close to that date's 10 Yr change, in bp, could a model fitted only on earlier dates get, from the 20 changes before it?

Inside the file

Every fitted value is for a date in the file, from earlier dates only; nothing after its last date.

One baseline

The last value carried forward: for changes, a change of zero.

Not evidence

A walk-forward error describes past dates, not any later date.

Allowed names

fitted change in bp

walk-forward error

the last value carried forward

Never called

a forecast or a prediction

tomorrow's move or a call

an outlook or a view on rates

Development years and held-out years, set first

2,001 development dates

2015-01-02 to 2022-12-30: fit, score, choose

939 held out

day 14, once

Why cut, when walk-forward is past-only


Every run of a walk-forward score is a chance to choose. Enough choices find a winner by luck; the held-out years are the dates nobody chose against.

Course 4 used these dates

Day 11: the same day's 30 Yr from the same day's 2 Yr and 10 Yr. Day 14: PCA. No row held out. Course 6 asks a new question, so it cuts its own.

Of the held-out years only the count and the first and last dates are read: 2023-01-03 to 2026-10-02.

Windows: the days before each date

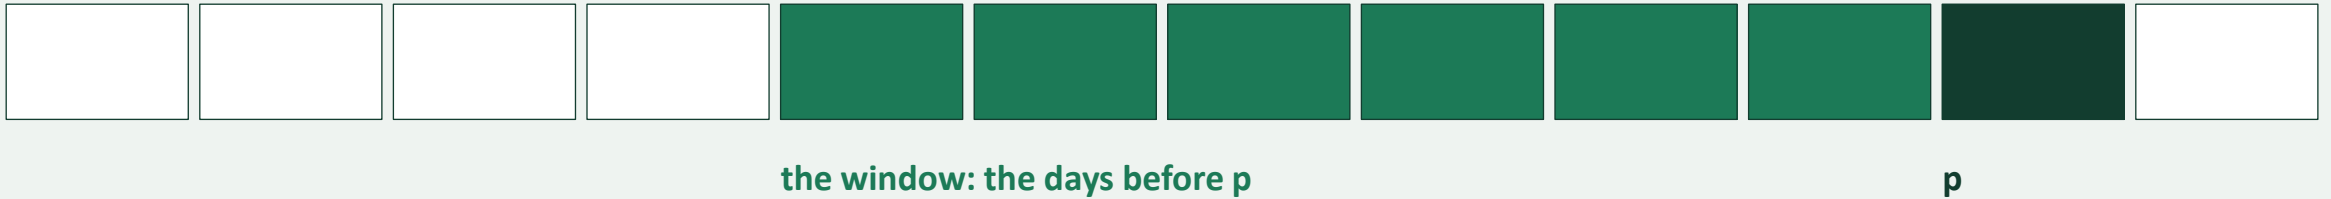

```
inputs = np.stack([rows[p - window:p] for p in positions]) # stops before p
```

(1980, 20, 1)

inputs: samples, steps, channels

2015-02-03

first target date; its window is the 20 trading days before it

A window that held its own date's change would hand the model its answer.

Two rules to beat, by fold

Fold	Test dates	Zero change	Training mean
fold 1	2017-02-07 to 2018-02-07	2.72	2.74
fold 2	2018-02-08 to 2019-02-12	2.76	2.79
fold 3	2019-02-13 to 2020-02-14	3.44	3.46
fold 4	2020-02-18 to 2021-02-18	3.53	3.53
fold 5	2021-02-19 to 2022-02-17	3.59	3.59

MAE in bp, mean of 5 folds

Zero change 3.21; training mean 3.22.
Fitting one number did not beat fitting nothing.

504 dates to fit, then 252 at a time. The last 216 dates, from 2022-02-18, fit no sixth year.

One fold by hand: four doors closed

Flatten -> Dense(16, relu) -> Dense(1): 353 weights and biases, fitted on the standardized change

1. Scaler

fitted on the rows inside the training windows only

2. Target

standardized on the training dates, back to bp at the end

3. Stopping rows

the last fifth of the training windows, in date order

4. Windows

each ends the day before its date

2.87 bp

fold 1, network: 404 windows fitted, 100 to stop

2.72 bp

fold 1, zero change, same dates

walk_forward_network over five folds

Fold	Network	Zero change	Training mean	Best epoch
fold 1	2.87	2.72	2.74	50
fold 2	2.90	2.76	2.79	28
fold 3	3.64	3.44	3.46	25
fold 4	3.70	3.53	3.53	11
fold 5	3.62	3.59	3.59	8

3.35 bp

dense network, mean of 5 folds

3.21 bp

zero change, mean of 5 folds

0 of 5

folds below zero change

The 20 changes before a date held nothing this network could fit that beat the last value carried forward. Reported, not tuned away.

Levels instead of changes

Fold	Network	Last value	Best epoch	Outside range
fold 1	3.69	2.72	50	16
fold 2	4.22	2.76	1	177
fold 3	10.77	3.44	3	0
fold 4	6.02	3.53	50	247
fold 5	11.16	3.59	1	0

7.17 bp

network on levels

3.21 bp



last value carried
forward

Course 4's reason, checked

Most levels outside the training range was not the worst fold.

The last value gets the copy for free. The network has to learn it, and did not on any fold.

Fold by fold

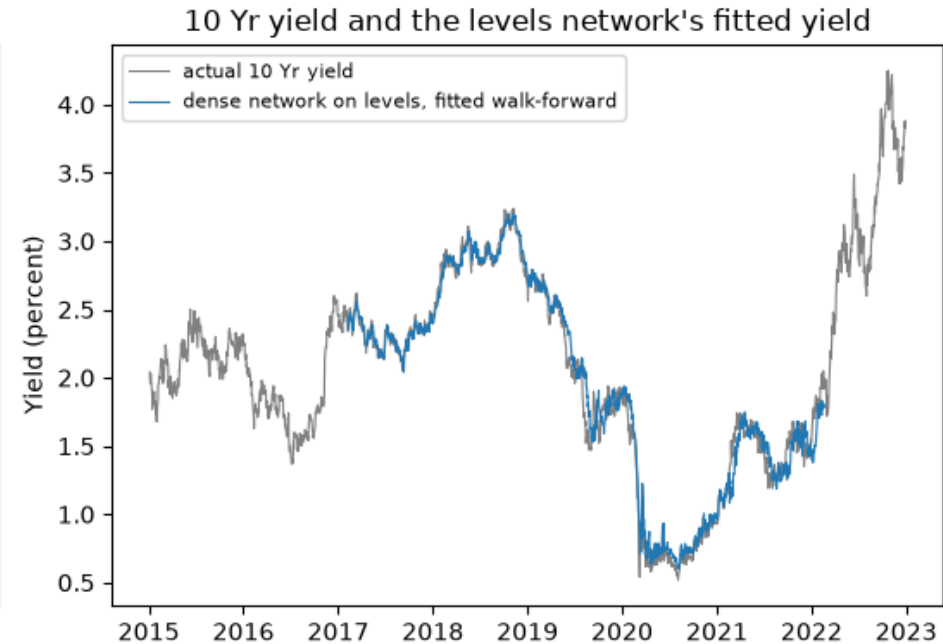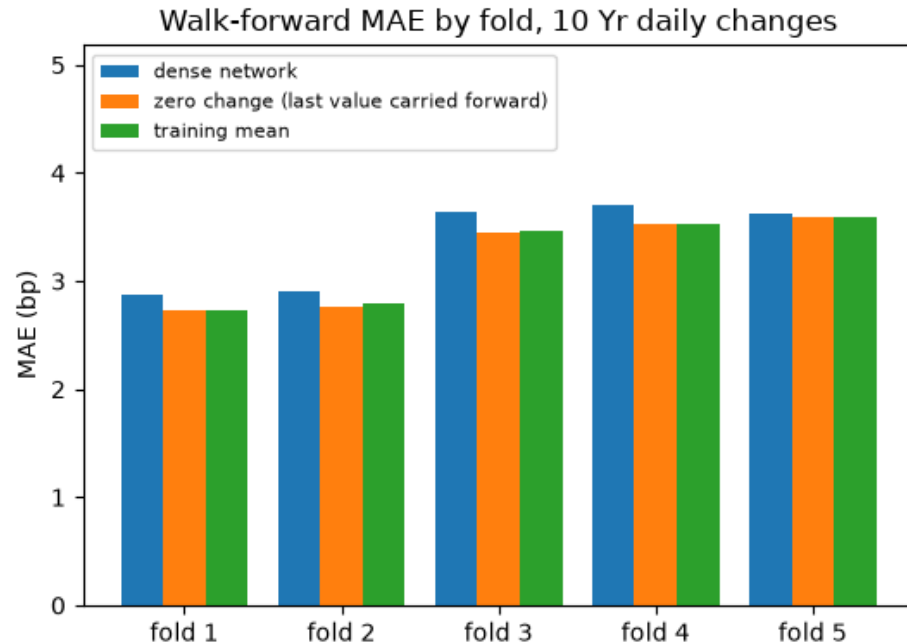

All three rise in folds 3 to 5: the 10 Yr moved more on an average day then. The rules did not change.

What this shows, and what it does not

What it shows

On 1,260 past dates the network was further from the actual change than zero change, on every fold.

What it does not

That no model could do better; or anything about a date outside the folds.

Why report it

Each change tried is a choice on these folds. Enough choices find a winner by luck.

A walk-forward error on past dates is not evidence about any later date, and not a view on rates.

Excel side by side

Excel side by side (tested in Excel)

`=(B3-B2)*100`

`=AVERAGE(OFFSET(C23,-20,0,20,1))`

`=INDEX(OFFSET(C23,-20,0,20,1),20)`

`=AVERAGE(ABS(curve!C527:C778))`

`=AVERAGE(ABS(curve!C527:C778-AVERAGE(curve!C23:C526)))`

`=AVERAGE(ABS(curve!C527:C778-curve!F527:F778))`

change in bp, C3 filled down

the window's mean; first -2.2000

the window's last day: the row above

zero change, fold 1: 2.7222

training mean: 2.7362

network: 2.8715

No walk-forward routine and no network training in Excel. Every number above equals Python's within 1e-12.

Save the day: git blame and the sequence log

```
git blame -s --root -L "/def fit_arrays/,+1" -L "/def make_windows/,+1" netkit.py
b8632891 110) def fit_arrays(transformer, X_fit, *others) -> tuple:
53d8ed2d 574) def make_windows(values, target, window: int, positions)
```


Two hashes: fit_arrays came in the morning commit, make_windows in today's. A pattern keeps working when lines above it move.

```
model,channels>window,rows,folds,mae_bp,zero_change_mae_bp,folds_below_zero_change
zero_change,1,20,development,5,3.2087,3.2087,0
training_mean,1,20,development,5,3.2216,3.2087,0
dense_16_changes,1,20,development,5,3.3472,3.2087,0
dense_16_levels,1,20,development,5,7.1715,3.2087,0
```

The sequence log: one row per rule or network, on the development years' folds.

The AI check

The docstring is the prompt. The code that comes back runs, and its number looks fine.

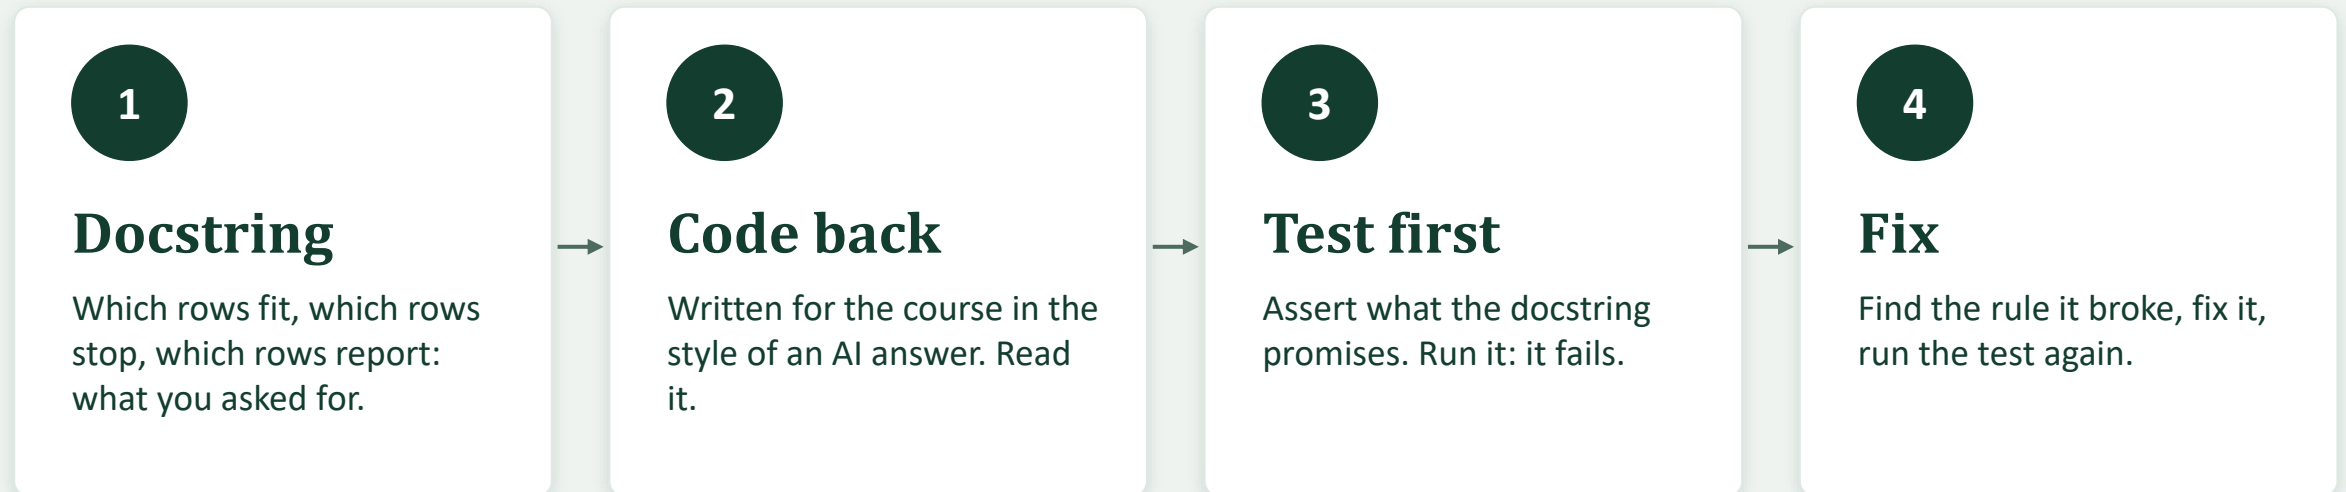

Today: windows end on the date they are scored on: fold 1 MAE 0.84 bp against 2.87 bp; the test flags 1,912 windows.

Code that runs is not the same as code that is right.

What you can do now

- State a sequence question in the past tense
- Cut development and held-out years first
- Build windows that end before their date
- Score zero change and the training mean by fold
- Fit walk-forward folds with nothing leaking in

Week 3, Day 2 Recurrent networks: LSTM and GRU, on the same folds