


Actividad 4 — Separación de funciones

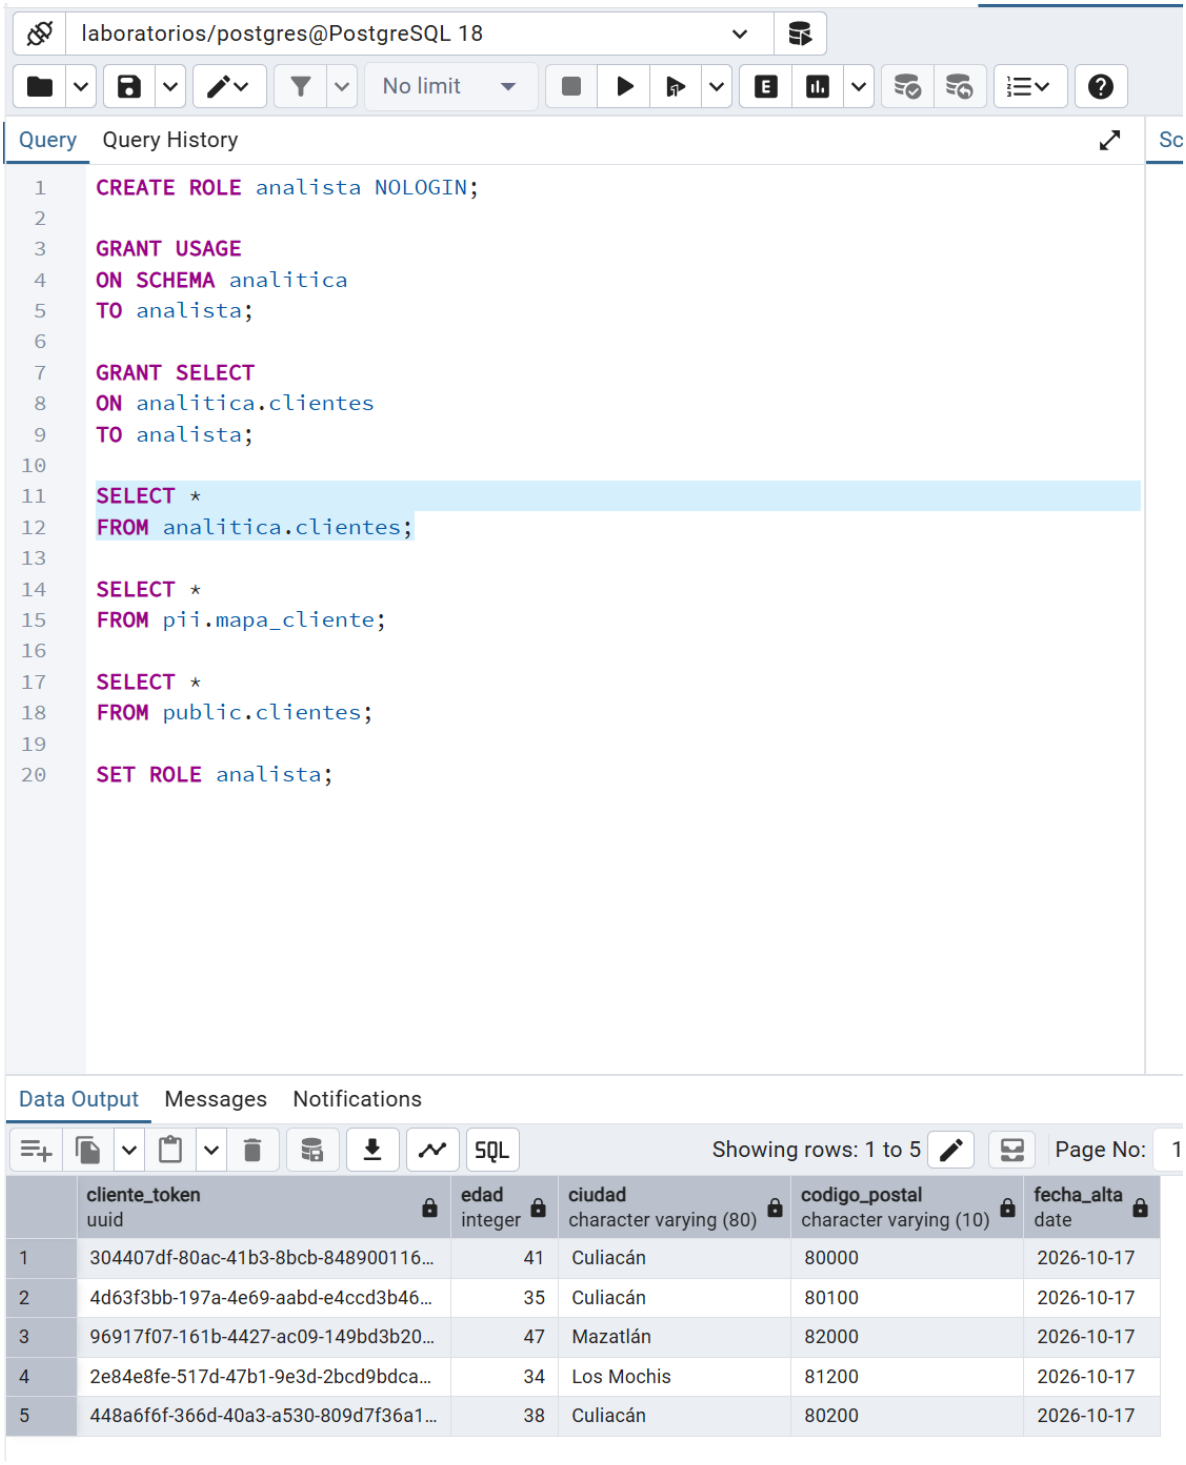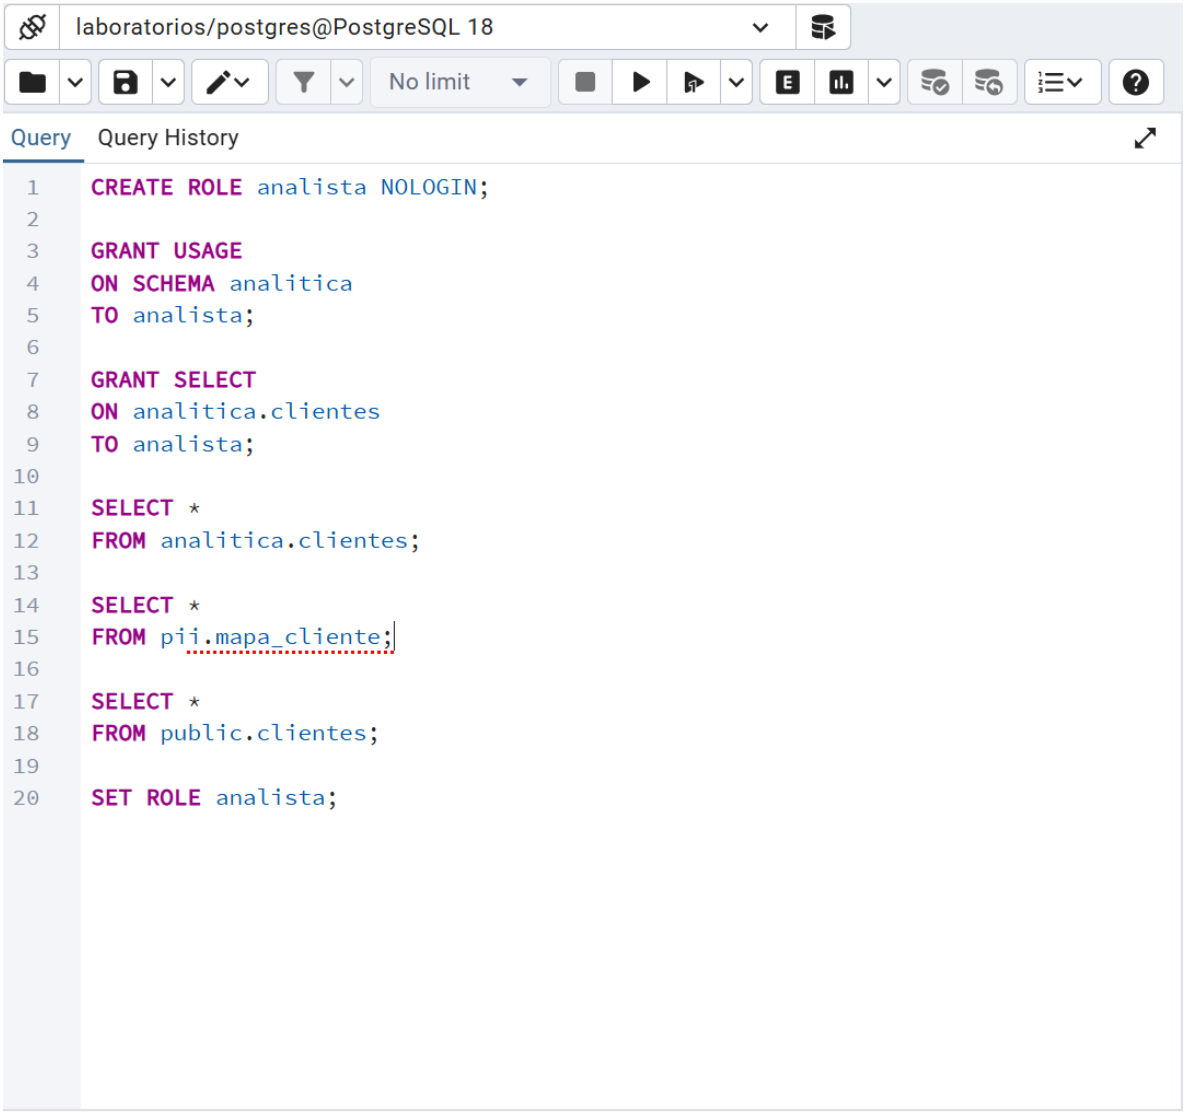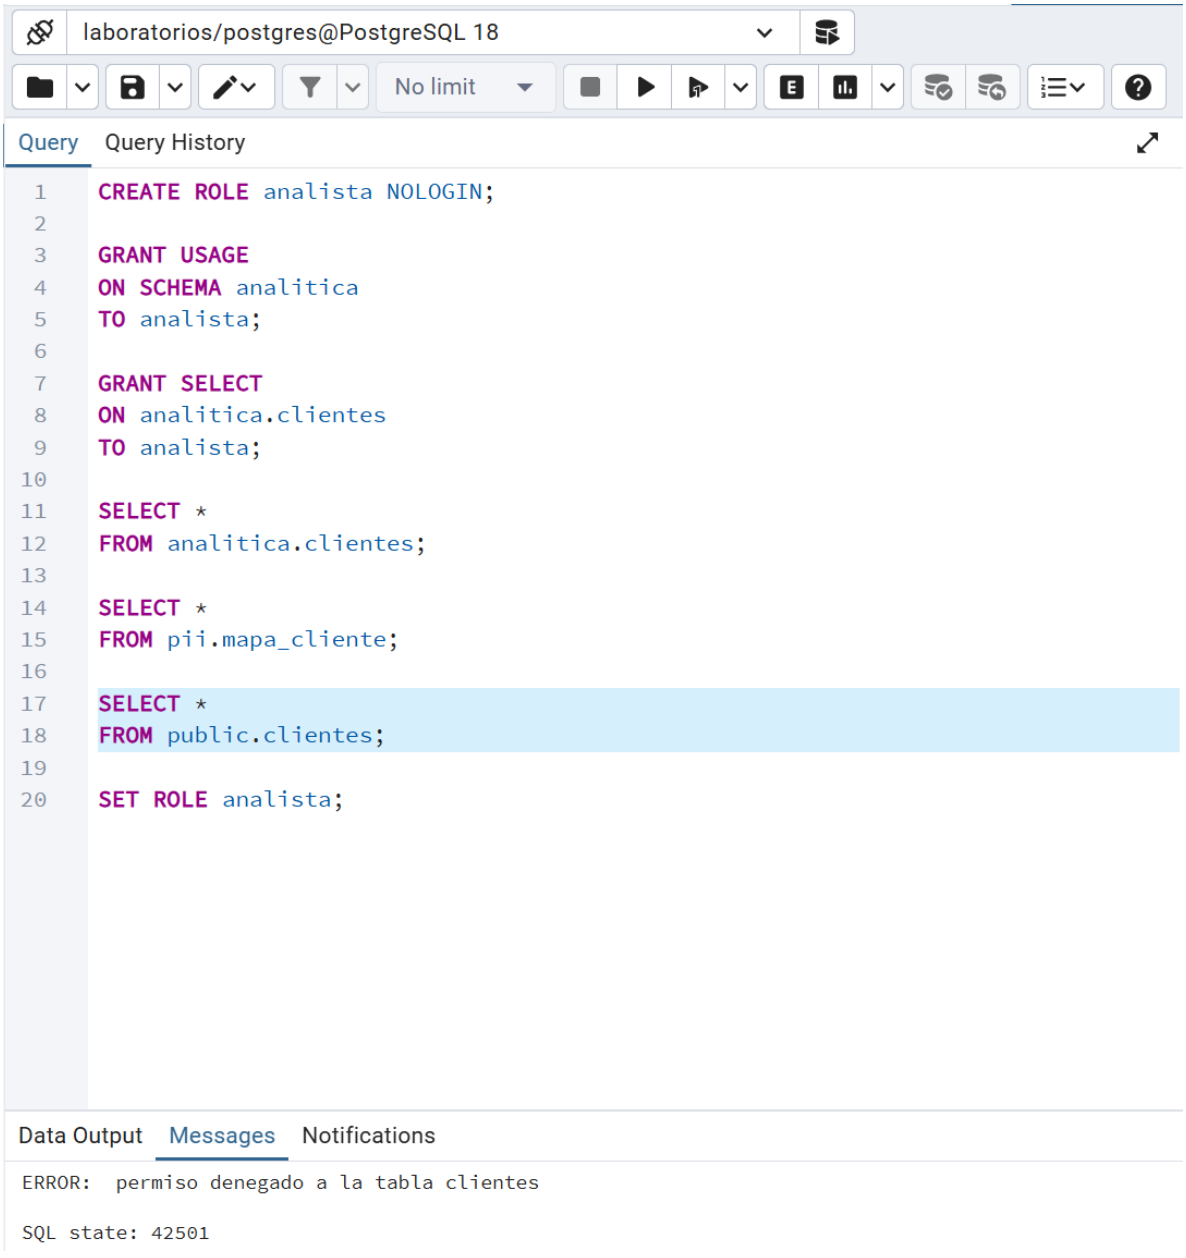

	cliente_token uuid	edad integer	ciudad character varying (80)	codigo_postal character varying (10)	fecha_alta date
1	304407df-80ac-41b3-8bcb-848900116…	41	Culiacán	80000	2026-10-17
2	4d63f3bb-197a-4e69-aabd-e4ccd3b46…	35	Culiacán	80100	2026-10-17
3	96917f07-161b-4427-ac09-149bd3b20…	47	Mazatlán	82000	2026-10-17
4	2e84e8fe-517d-47b1-9e3d-2bcd9bdca…	34	Los Mochis	81200	2026-10-17
5	448a6f6f-366d-40a3-a530-809d7f36a1…	38	Culiacán	80200	2026-10-17


laboratorios/postgres@PostgreSQL 18
No limit
Query
Query History
1 CREATE ROLE analista NOLOGIN;
2
3 GRANT USAGE
4 ON SCHEMA analitica
5 TO analista;
6
7 GRANT SELECT
8 ON analitica.clientes
9 TO analista;
10
11 SELECT *
12 FROM analitica.clientes;
13
14 SELECT *
15 FROM pii.mapa_cliente;
16
17 SELECT *
18 FROM public.clientes;
19
20 SET ROLE analista;
Data Output
Messages
Notifications
ERROR: permiso denegado al esquema pii
LINE 2: FROM pii.mapa_cliente;
^
SQL state: 42501
Character: 16


laboratorios/postgres@PostgreSQL 18
No limit
Query
Query History
1 CREATE ROLE analista NOLOGIN;
2
3 GRANT USAGE
4 ON SCHEMA analitica
5 TO analista;
6
7 GRANT SELECT
8 ON analitica.clientes
9 TO analista;
10
11 SELECT *
12 FROM analitica.clientes;
13
14 SELECT *
15 FROM pii.mapa_cliente;
16
17 SELECT *
18 FROM public.clientes;
19
20 SET ROLE analista;
Data Output
Messages
Notifications
ERROR: permiso denegado a la tabla clientes
SQL state: 42501

Actividad 5 — Anonimización (anonymization)


Query | Query History

```sql
SELECT
    CASE
        WHEN edad BETWEEN 18 AND 30 THEN '18-30'
        WHEN edad BETWEEN 31 AND 45 THEN '31-45'
        ELSE '46+'
    END AS rango_edad,
    COUNT(*) AS total
FROM clientes
GROUP BY 1;
```

Data Output | Messages | Notifications

Showing rows: 1 to 2 | Page No:

	rango_edad text	total bigint
1	31-45	4
2	46+	1

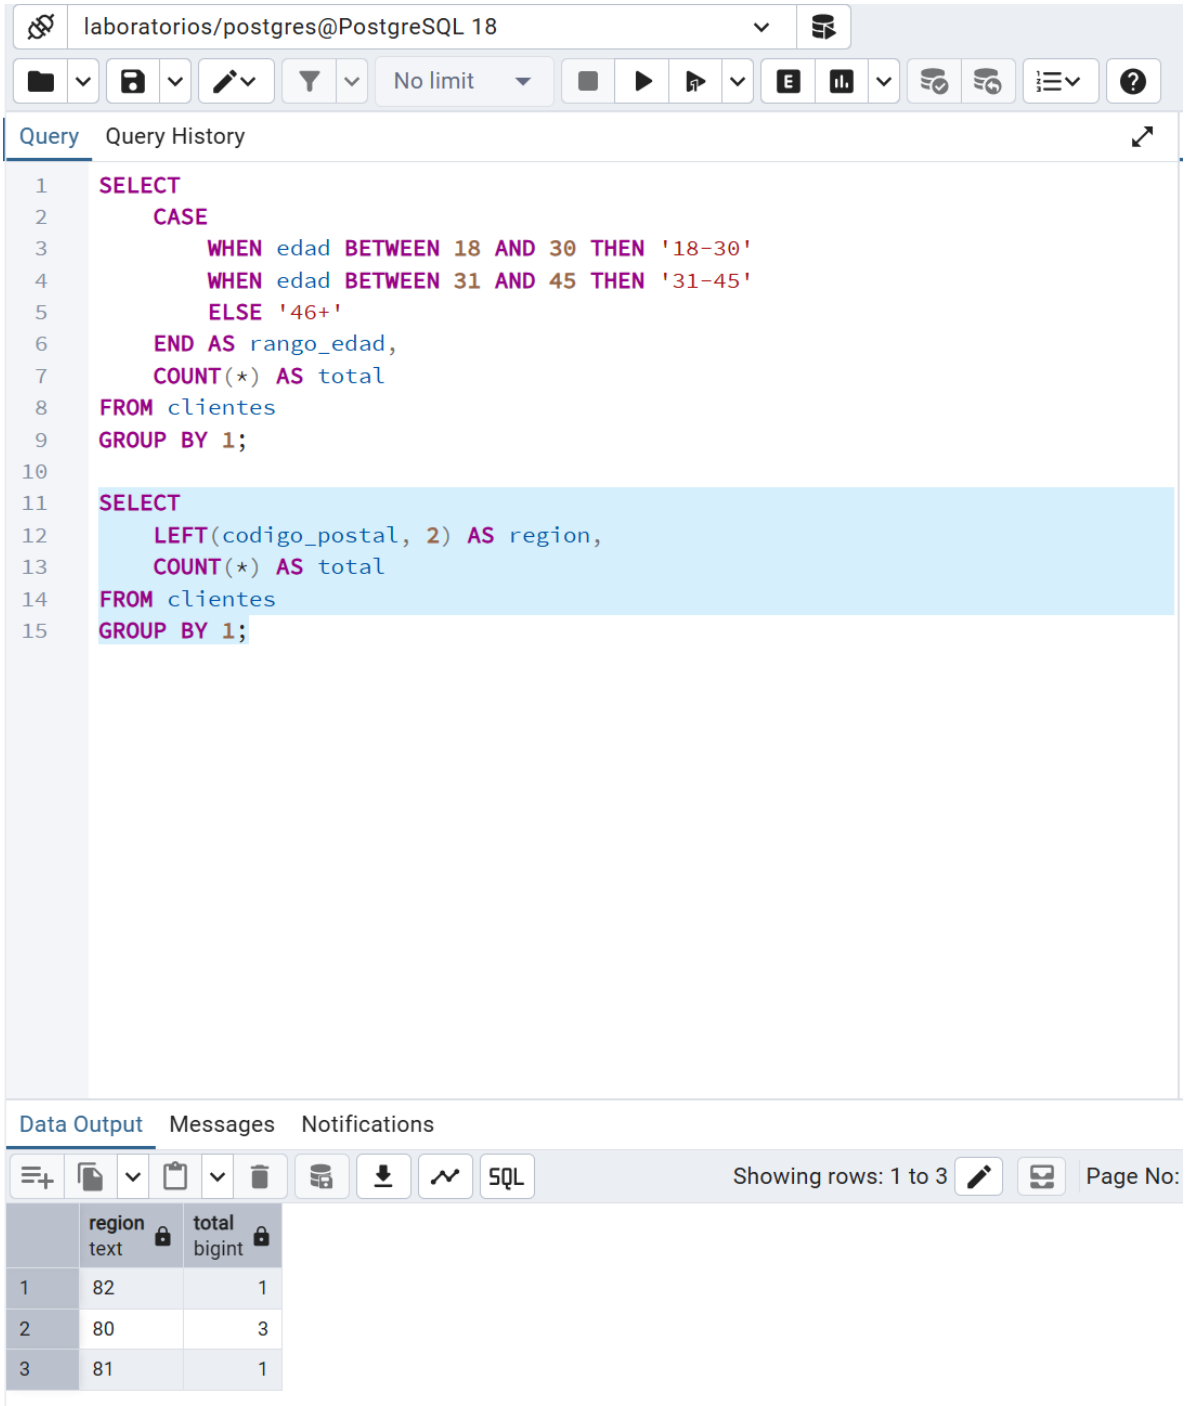
laboratorios/postgres@PostgreSQL 18
No limit
Query
Query History
SELECT
CASE
WHEN edad BETWEEN 18 AND 30 THEN '18-30'
WHEN edad BETWEEN 31 AND 45 THEN '31-45'
ELSE '46+'
END AS rango_edad,
COUNT(*) AS total
FROM clientes
GROUP BY 1;
SELECT
LEFT(codigo_postal, 2) AS region,
COUNT(*) AS total
FROM clientes
GROUP BY 1;
Data Output
Messages
Notifications
SQL
Showing rows: 1 to 3
Page No:
region text
total bigint
1 82 1
2 80 3
3 81 1

Query | Query History

```
    CASE
        WHEN edad BETWEEN 18 AND 30 THEN '18-30'
        WHEN edad BETWEEN 31 AND 45 THEN '31-45'
        ELSE '46+'
    END AS rango_edad,
    COUNT(*) AS total
FROM clientes
GROUP BY 1;

SELECT
    LEFT(codigo_postal, 2) AS region,
    COUNT(*) AS total
FROM clientes
GROUP BY 1;

SELECT
    CASE
        WHEN edad BETWEEN 18 AND 30 THEN '18-30'
        WHEN edad BETWEEN 31 AND 45 THEN '31-45'
        ELSE '46+'
    END AS rango_edad,

    LEFT(codigo_postal, 2) AS region,

    COUNT(*) AS total


FROM clientes

GROUP BY 1, 2;
```

Data Output | Messages | Notifications

Showing rows: 1 to 3 | Page No:

	rango_edad text	region text	total bigint
1	31-45	81	1
2	46+	82	1
3	31-45	80	3

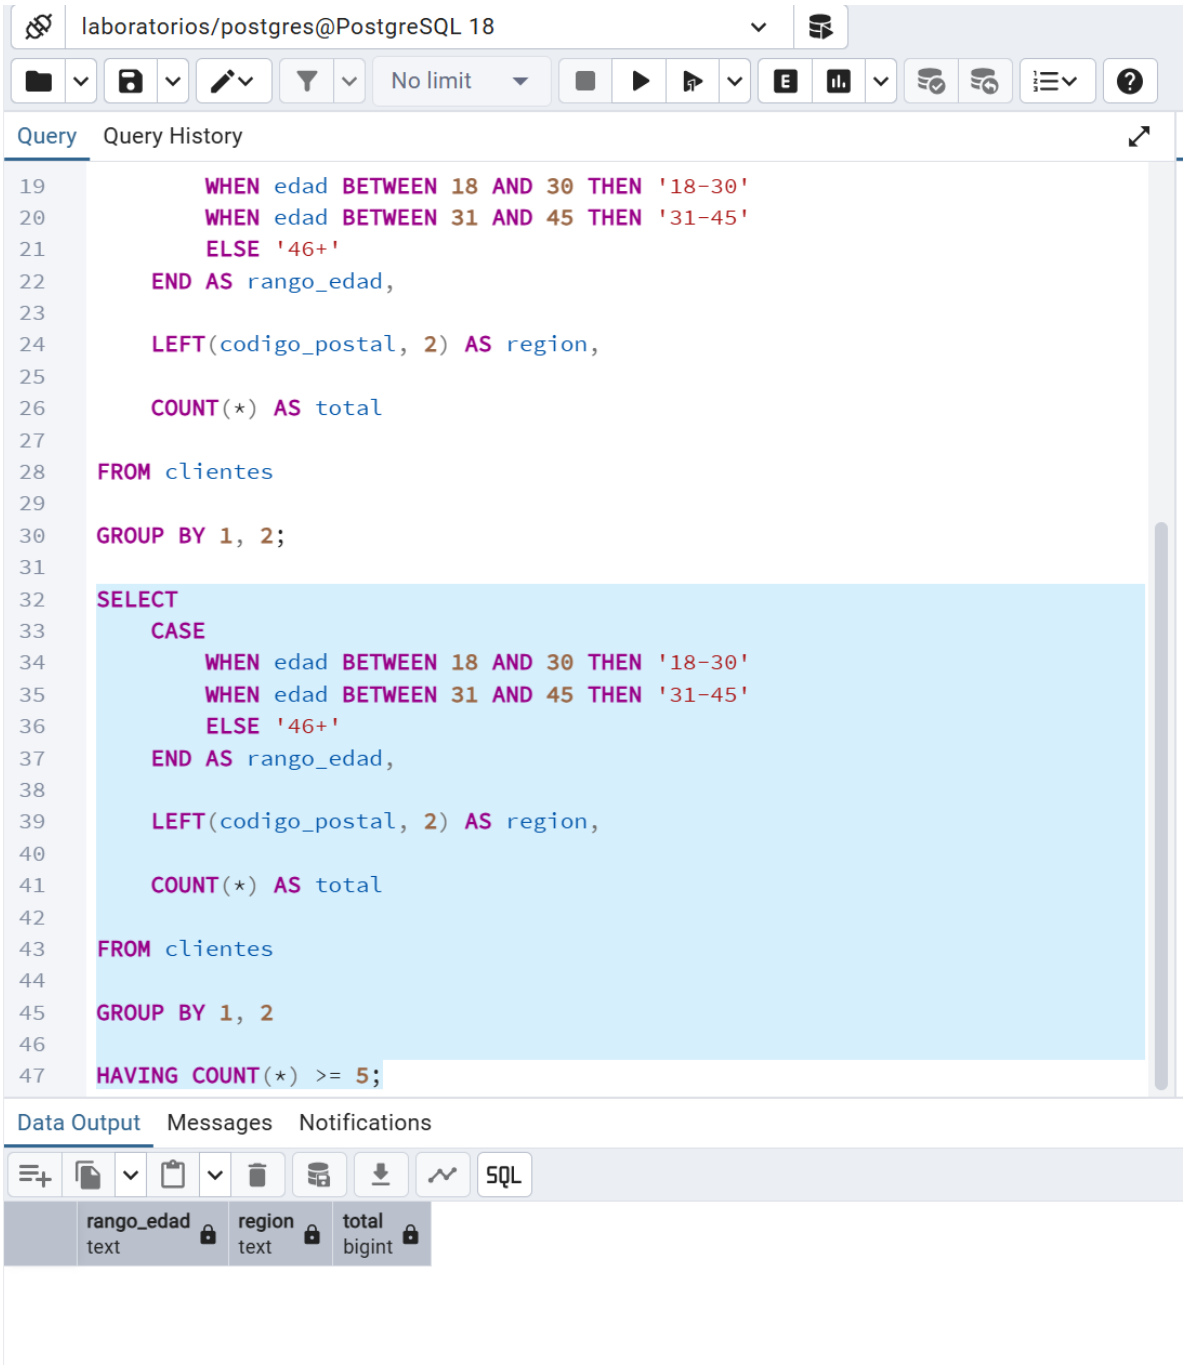
laboratorios/postgres@PostgreSQL 18
No limit
Query
Query History
19 WHEN edad BETWEEN 18 AND 30 THEN '18-30'
20 WHEN edad BETWEEN 31 AND 45 THEN '31-45'
21 ELSE '46+'
22 END AS rango_edad,
23
24 LEFT(codigo_postal, 2) AS region,
25
26 COUNT(*) AS total
27
28 FROM clientes
29
30 GROUP BY 1, 2;
31
32 SELECT
33 CASE
34 WHEN edad BETWEEN 18 AND 30 THEN '18-30'
35 WHEN edad BETWEEN 31 AND 45 THEN '31-45'
36 ELSE '46+'
37 END AS rango_edad,
38
39 LEFT(codigo_postal, 2) AS region,
40
41 COUNT(*) AS total
42
43 FROM clientes
44
45 GROUP BY 1, 2
46
47 HAVING COUNT(*) >= 5;
Data Output
Messages
Notifications
SQL
rango_edad text
region text
total bigint