147

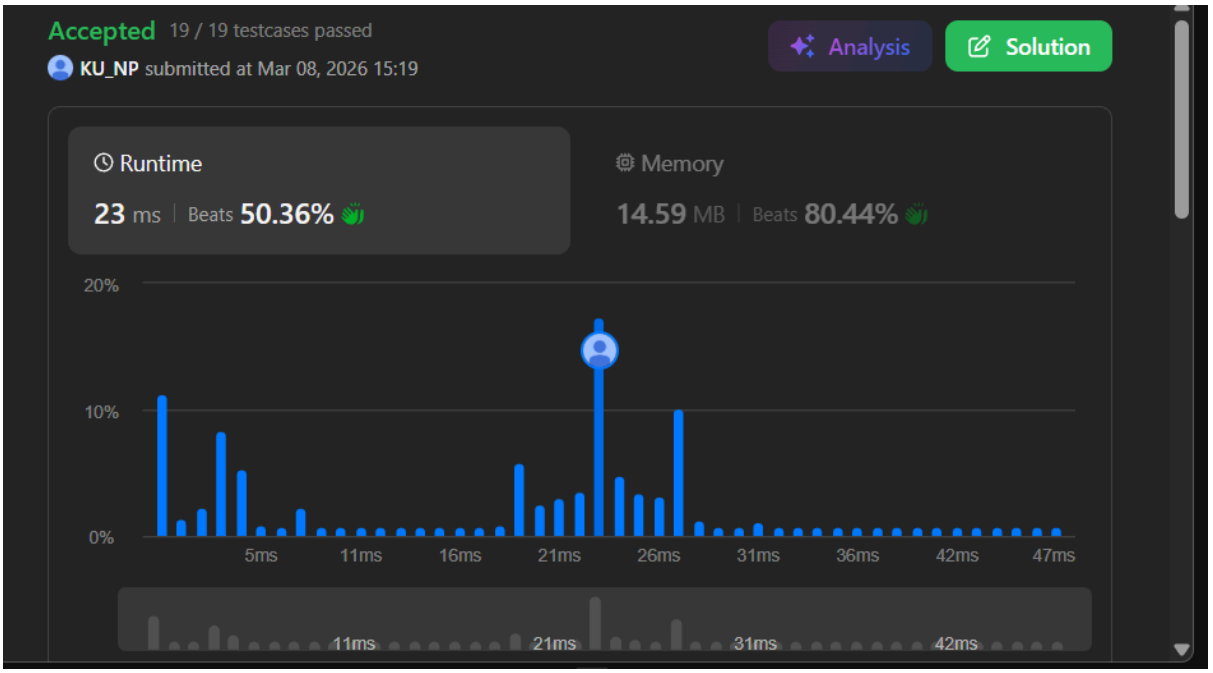

148

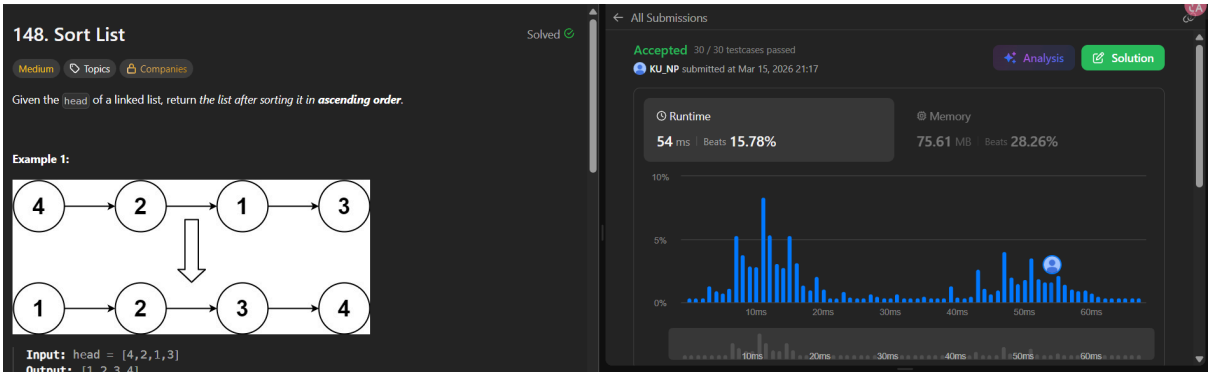

167

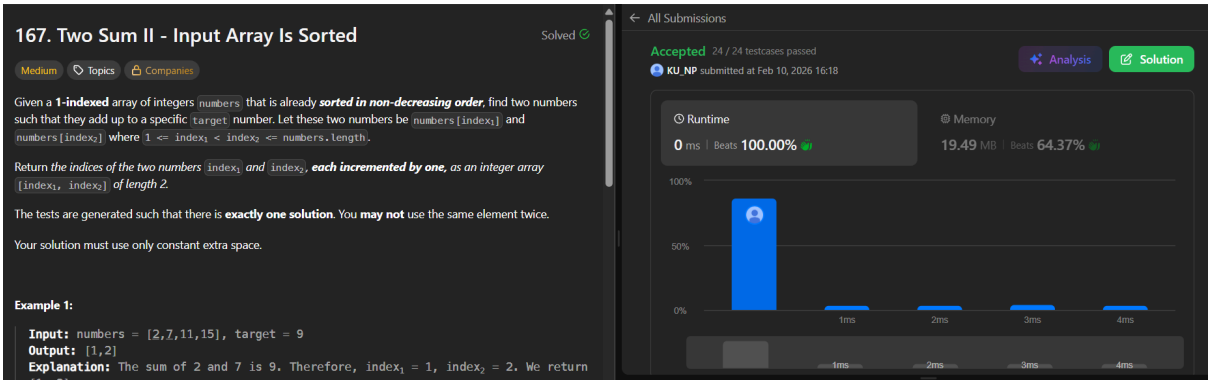

2090

2090. K Radius Subarray Averages

Solved

Medium | Topics | Companies | Hint

You are given a **0-indexed** array `nums` of `n` integers, and an integer `k`.

The **k-radius average** for a subarray of `nums` **centered** at some index `i` with the **radius** `k` is the average of **all** elements in `nums` between the indices `i - k` and `i + k` (**inclusive**). If there are less than `k` elements before **or** after the index `i`, then the **k-radius average** is `-1`.

Build and return *an array* `avgs` *of length* `n` *where* `avgs[i]` *is the* ***k-radius average*** *for the subarray centered at index* `i`.

The **average** of `x` elements is the sum of the `x` elements divided by `x`, using **integer division**. The integer division truncates toward zero, which means losing its fractional part.

- For example, the average of four elements `2`, `3`, `1`, and `5` is `(2 + 3 + 1 + 5) / 4 = 11 / 4 = 2.75`, which truncates to `2`.

All Submissions

Accepted 40 / 40 testcases passed

KU_NP submitted at Jan 23, 2026 16:14

Analysis | Solution

Runtime: 0 ms | Beats 100.00%

Memory: 134.28 MB | Beats 85.20%

215

215. Kth Largest Element in an Array

Solved

Medium | Topics | Companies

Given an integer array `nums` and an integer `k`, return *the* k^{th} *largest element in the array.*

Note that it is the kth largest element in the sorted order, not the kth distinct element.

Can you solve it without sorting?

Example 1:

```
Input: nums = [3,2,1,5,6,4], k = 2
Output: 5
```

Example 2:

```
Input: nums = [3,2,3,1,2,4,5,5,6], k = 4
Output: 4
```

All Submissions

Accepted 45 / 45 testcases passed

KU_NP submitted at Mar 15, 2026 16:25

Analysis | Solution

Runtime: 4 ms | Beats 96.31%

Memory: 59.41 MB | Beats 69.57%

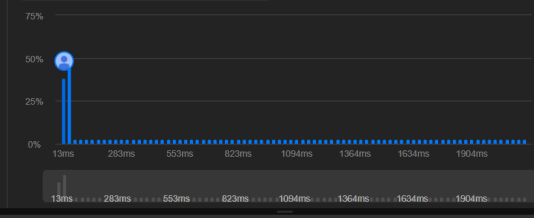

567

567. Permutation in String

Solved

Medium | Topics | Companies | Hint

Given two strings `s1` and `s2`, return `true` if `s2` contains a permutation of `s1`, or `false` otherwise.

In other words, return `true` if one of `s1`'s permutations is the substring of `s2`.

Example 1:

```
Input: s1 = "ab", s2 = "eidbaooo"
Output: true
Explanation: s2 contains one permutation of s1 ("ba").
```

Example 2:

```
Input: s1 = "ab", s2 = "eidboaoo"
Output: false
```

All Submissions

Accepted 110 / 110 testcases passed

KU_NP submitted at Mar 16, 2026 22:27

Analysis | Solution

Runtime: 0 ms | Beats 100.00%

Memory: 9.84 MB | Beats 88.36%

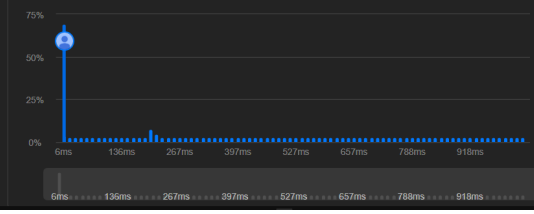

912

912. Sort an Array

Solved

Medium | Topics | Companies

Given an array of integers `nums`, sort the array in ascending order and return it.

You must solve the problem **without using any built-in** functions in `O(nlog(n))` time complexity and with the smallest space complexity possible.

Example 1:

```
Input: nums = [5,2,3,1]
Output: [1,2,3,5]
Explanation: After sorting the array, the positions of some numbers are not
changed (for example, 2 and 3), while the positions of other numbers are changed
(for example, 1 and 5).
```

Example 2:

```
Input: nums = [5,1,1,2,0,0]
```

All Submissions

Accepted 21 / 21 testcases passed

KU_NP submitted at Mar 03, 2026 22:43

Analysis | Solution

Runtime: 52 ms | Beats 68.12%
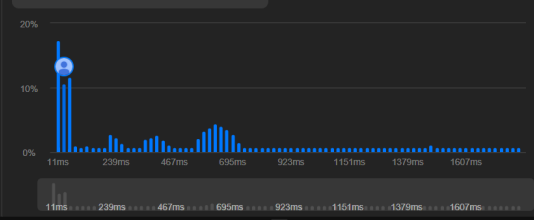
Memory: 73.04 MB | Beats 61.64%