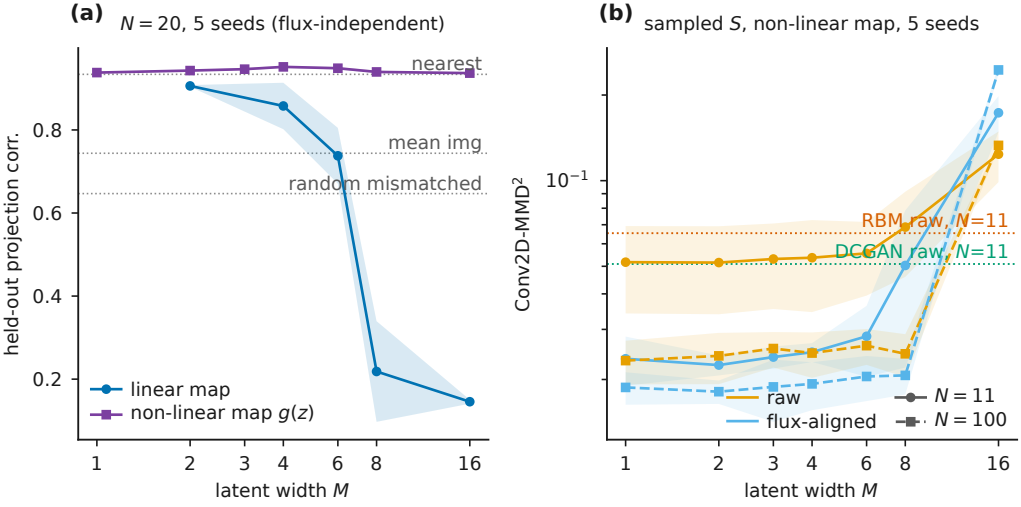
(a)
N = 20, 5 seeds (flux-independent)
nearest
mean img
random mismatched
held-out projection corr.
0.8
0.6
0.4
0.2
linear map
non-linear map g(z)
1
2
3
4
6
8
16
latent width M
(b)
sampled S, non-linear map, 5 seeds
Conv2D-MMD²
10⁻¹
RBM raw, N=11
DCGAN raw, N=11
raw
flux-aligned
N = 11
N = 100
1
2
3
4
6
8
16
latent width M