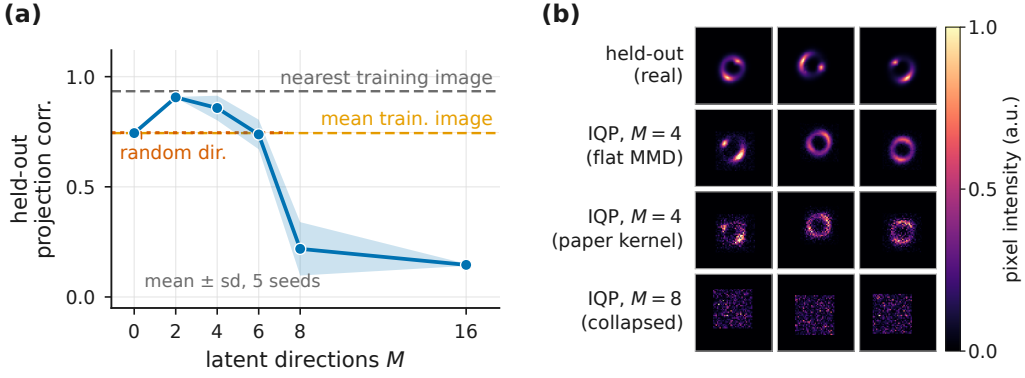
(a)
held-out
projection corr.
1.0
0.5
0.0
nearest training image
mean train. image
random dir.
mean ± sd, 5 seeds
0
2
4
6
8
16
latent directions M
(b)
held-out
(real)
IQP, $M = 4$
(flat MMD)
IQP, $M = 4$
(paper kernel)
IQP, $M = 8$
(collapsed)
1.0
0.5
0.0
pixel intensity (a.u.)