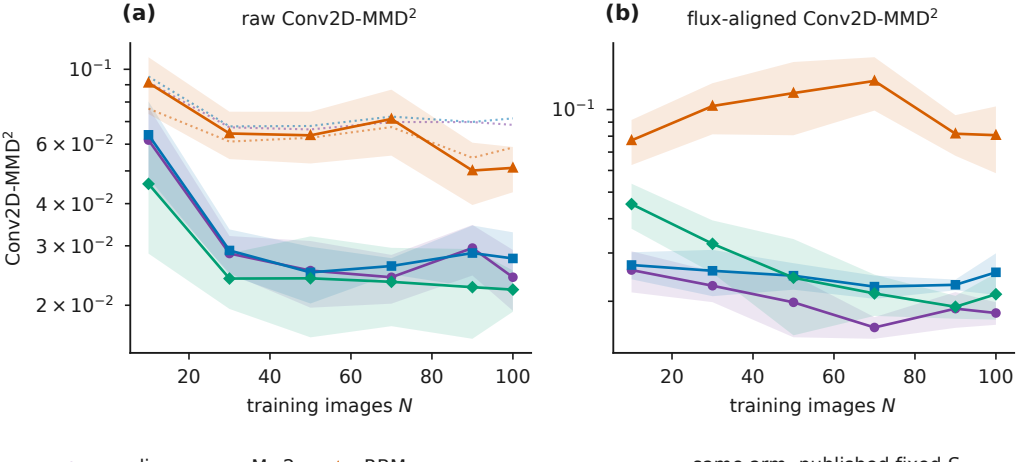
(a)
raw Conv2D-MMD²
(b)
flux-aligned Conv2D-MMD²
Conv2D-MMD²
10^{-1}
6×10^{-2}
4×10^{-2}
3×10^{-2}
2×10^{-2}
20
40
60
80
100
training images N
non-linear map, M=2
linear map, M=4
RBM
DCGAN (learns its own flux)
same arm, published fixed S