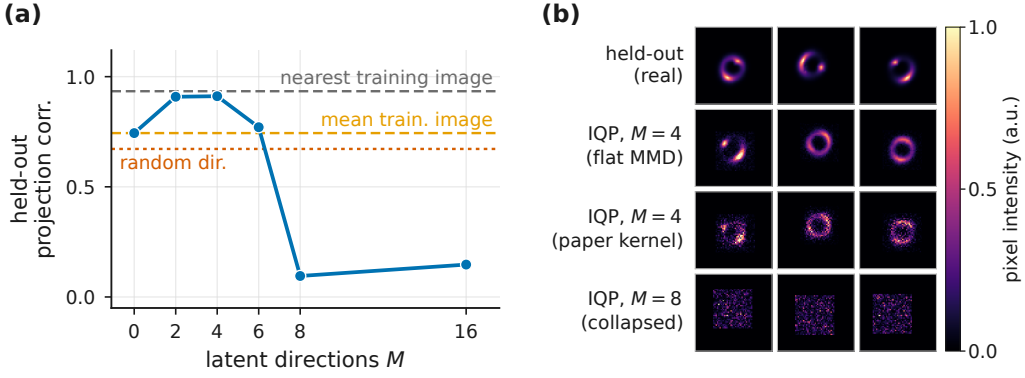
(a)
held-out projection corr.
1.0
0.5
0.0
nearest training image
mean train. image
random dir.
0
2
4
6
8
16
latent directions M
(b)
held-out (real)
IQP, $M = 4$ (flat MMD)
IQP, $M = 4$ (paper kernel)
IQP, $M = 8$ (collapsed)
1.0
0.5
0.0
pixel intensity (a.u.)