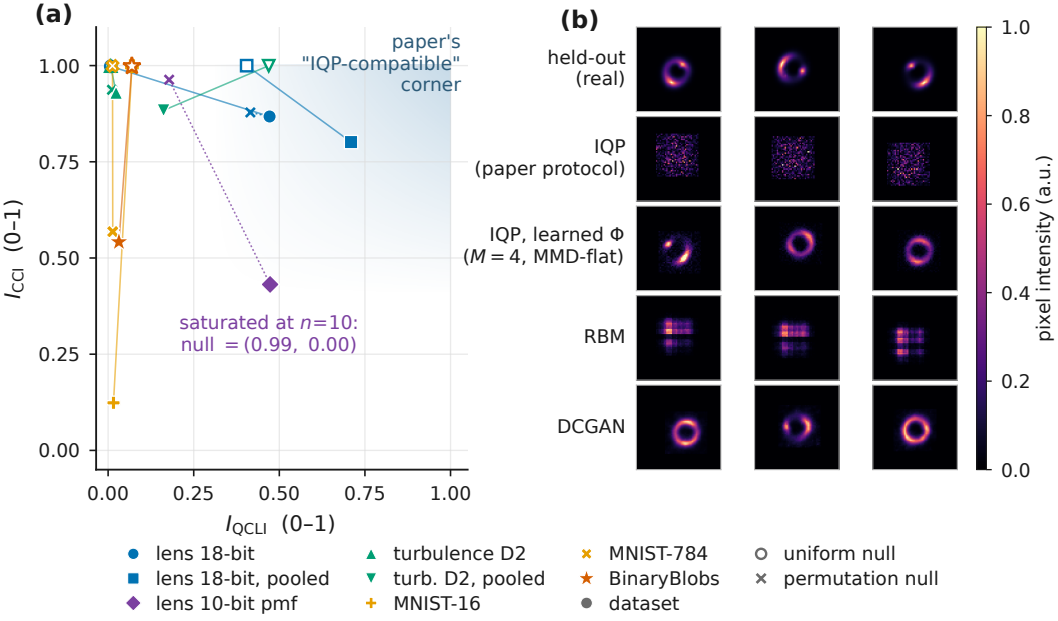

(a)
paper's
"IQP-compatible"
corner
saturated at n=10:
null = (0.99, 0.00)
I_{CCI} (0–1)
I_{QCLI} (0–1)
0.00
0.25
0.50
0.75
1.00
(b)
held-out
(real)
IQP
(paper protocol)
IQP, learned Φ
($M = 4$, MMD-flat)
RBM
DCGAN
pixel intensity (a.u.)
lens 18-bit
lens 18-bit, pooled
lens 10-bit pmf
turbulence D2
turb. D2, pooled
MNIST-16
MNIST-784
BinaryBlobs
dataset
uniform null
permutation null