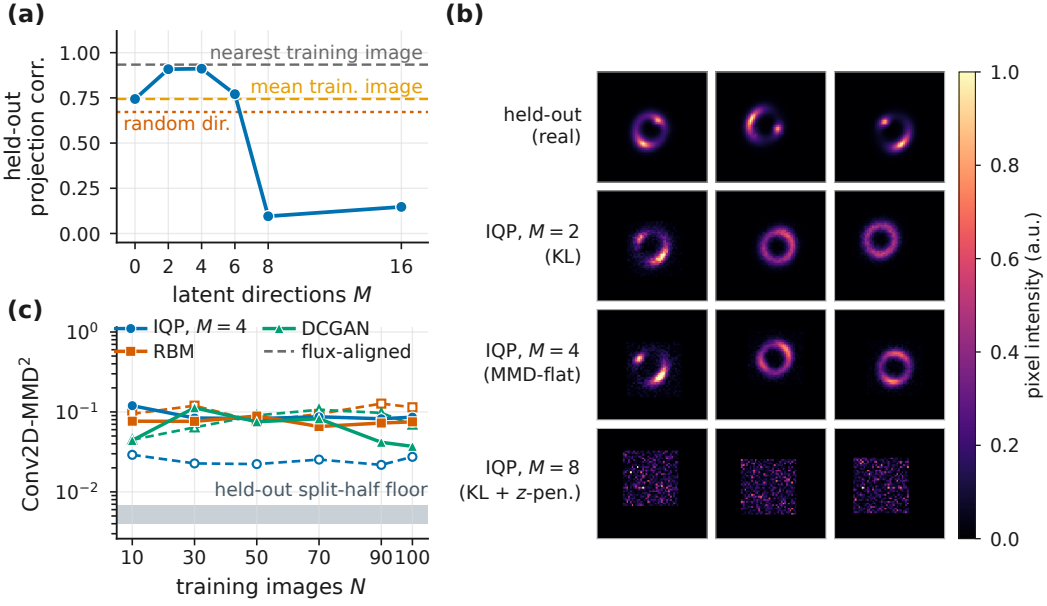

(a)
held-out projection corr.
1.00
0.75
0.50
0.25
0.00
nearest training image
mean train. image
random dir.
0
2
4
6
8
16
latent directions M
(b)
held-out (real)
IQP, $M = 2$ (KL)
IQP, $M = 4$ (MMD-flat)
IQP, $M = 8$ (KL + z-pen.)
1.0
0.8
0.6
0.4
0.2
0.0
pixel intensity (a.u.)
(c)
IQP, $M = 4$
DCGAN
RBM
flux-aligned
Conv2D-MMD^2
10^0
10^{-1}
10^{-2}
held-out split-half floor
10
30
50
70
90
100
training images N