Autoregressive rollout keeps a fixed-size two-resolution memory

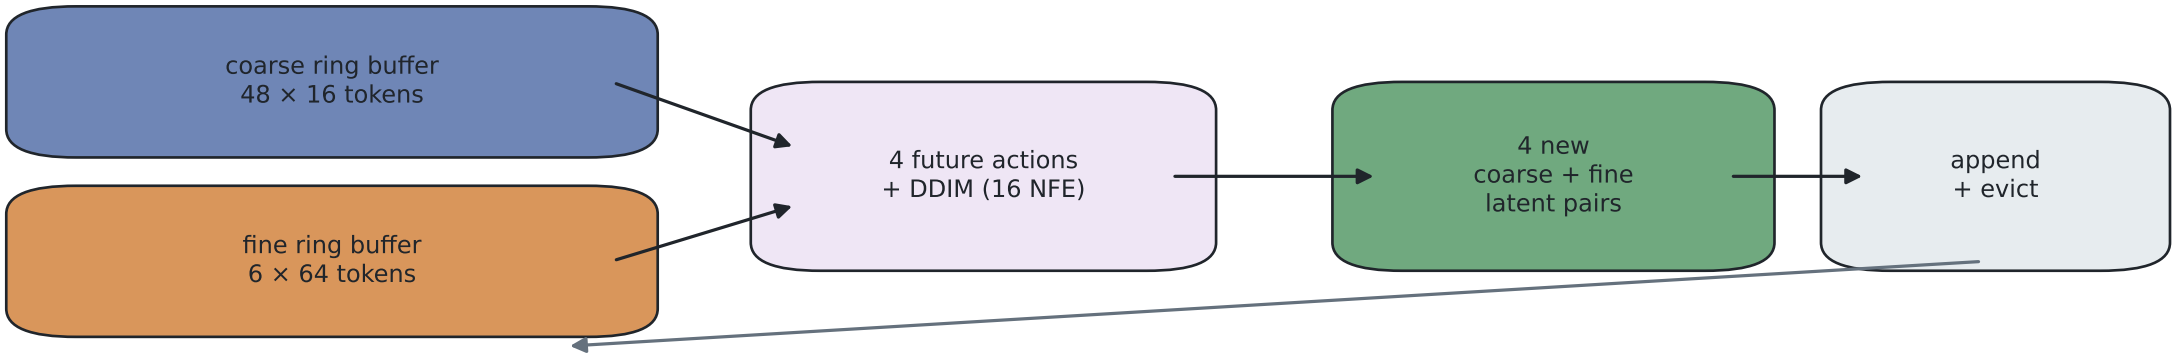

advance pointer by 4; training and rollout use the same consecutive buffer layout

memory state = 48×256 + 6×1024 = 18,432 latent numbers, independent of rollout length