Reverse replay reconstructs one local differentiation graph at a time

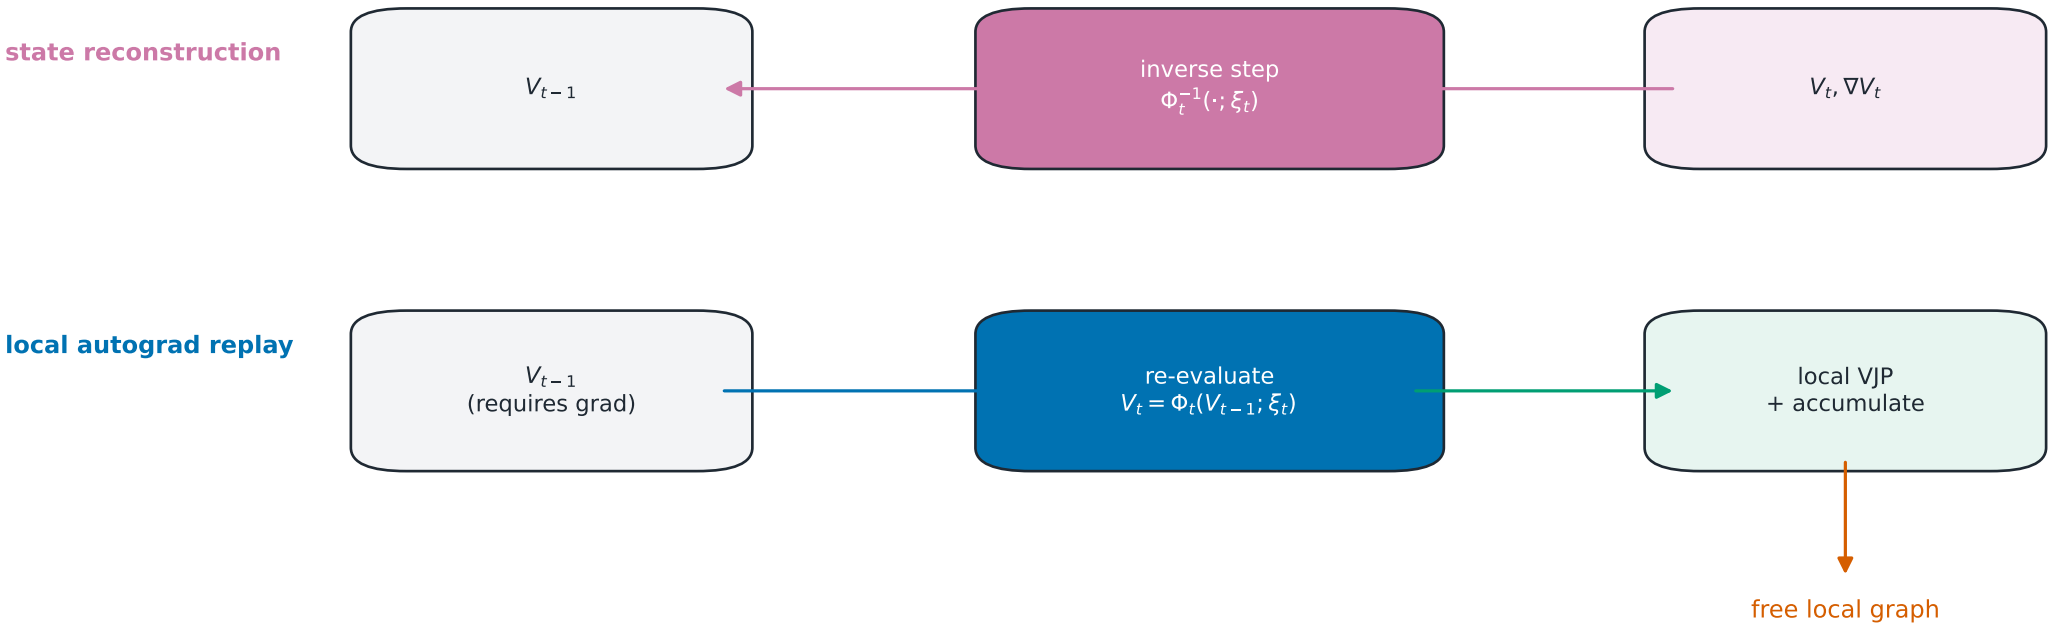

Activation tape/local graph: $O(1)$ in T. Stored replay signal: up to $O(TD_\xi)$ unless regenerated from a reproducible RNG state.