DISSERTATION MANUSCRIPT

Systems Analysis and Intelligent Technologies for Consistent Modeling of Hierarchical Video Data Generation Processes

Reach-efficient context memory and activation-efficient temporal optimization

Leonid Ruslanovych Kulyk · VNTU · 2026

English review edition · 3 August 2026

Front Matter

1. Title Page

- **Topic (UA, approved, verbatim — fixed):** «Системний аналіз та інтелектуальні технології консистентного моделювання процесів ієрархічної генерації відеоданих»
- **Topic (EN):** *Systems Analysis and Intelligent Technologies for Consistent Modeling of Hierarchical Video Data Generation Processes*
- Candidate: Kulyk Leonid Ruslanovych. Specialty 124 «System Analysis», field 12 «Information Technologies». Supervisor: Prof. O. B. Mokin, Dr. Sc. (Eng.). VNTU, Vinnytsia — 2026.
- UDC: 004.054:[004.032.26+004.85] **[AUTHOR: confirm the UDC classification and the title-page wording against the approved institutional record.]**

2. Abstract

Kulyk L. R. *Systems Analysis and Intelligent Technologies for Consistent Modeling of Hierarchical Video Data Generation Processes*. — Qualifying scientific work submitted as a manuscript.

The dissertation addresses the scientific and technical problem of modelling long multi-step video processes under bounded computational resources. A video generator must retain memory-relevant history, preserve task-relevant visual detail, and support differentiation through long temporal computations. Treating these requirements as one undifferentiated “memory” problem obscures which resource is limiting and which intervention is appropriate.

The work develops a systems methodology that separates total training and inference memory into parameter, optimizer, context/state, activation, and transient components:

$$M_{\text{system}} = M_{\text{parameters}} + M_{\text{optimizer}} + M_{\text{context/state}} + M_{\text{activations}} + M_{\text{transient}}.$$

Two complementary resource axes are investigated. Hierarchical or multirate context packaging acts on $M_{\text{context/state}}$ by retaining distant history at reduced spatial resolution or temporal density. Reversible temporal computation acts on $M_{\text{activations}}$ by reconstructing intermediate states during reverse replay. Their savings were measured separately and are not assumed to multiply automatically.

The dissertation develops methods for entropy-guided adaptive decomposition of video data, N-dimensional rotary positional encoding, reversible optimization of long temporal processes, and multi-stream latent video generation. The final hierarchical predictor uses a frozen two-level continuous latent representation, a shared joint-attention backbone, v-parameterized window diffusion, and autoregressive rollout. A purpose-built panning-world instrument provides exact geometric observability when content leaves and re-enters the viewport. Context packages are compared at explicit context-

token budgets, and inference is based on paired clip-cluster resampling with simultaneous max-statistic intervals for registered comparison families.

On a hash-pinned untouched holdout, hierarchy is confirmed where a token-matched flat full-resolution window cannot reach the relevant re-entry past. The registered 14-to-48-frame reach-band effects are +0.0980 and +0.0914 across two training seeds. The simultaneous tested frontier confirms hierarchy at 896 and 1,152 context tokens, leaves 1,792 unresolved, and confirms flat full-resolution context at 2,432 and 3,072. In the frozen interface, 48 fine frames require 3,072 context tokens, while 48 coarse frames plus a two- or six-frame fine tail require 896 or 1,152. Thus the confirmed hierarchical packages provide the same nominal 48-frame addressable reach with 2.67–3.43 times fewer context tokens; this is a reach-efficiency result, not a claim of equal information or equal prediction error.

The principal directions persist across registered sampler allocations and an independently trained codec, although the upper inversion is less precise under alternate sampler or codec conditions. A preregistered long-rollout study confirms an early hierarchy benefit at three training seeds but fails to replicate a seed-0 late inversion; no stable trust boundary is claimed. A protected persistent-object 48-to-300 Moving-MNIST study provides a mixed external boundary: hierarchy better preserves spatial support and trajectory continuity, whereas flat context better preserves digit identity. Both systems remain difficult in absolute terms.

The reversible-computation strand independently demonstrates algebraic reverse replay, numerical state reconstruction within reported tolerances, and an approximately horizon-independent peak activation-tape footprint in the tested recurrence. Replay noise or equivalent reproducibility metadata remains a separately accounted horizon-dependent input. Gradient checkpointing is the appropriate practical comparator, and the measured applicability analysis identifies cases in which reversibility does not pay. The dissertation therefore contributes an integrated systems methodology and research software toolkit, not one experimentally validated end-to-end model that combines every strand.

The practical design rule is conditional: compress long-lived state when distant reach is the binding constraint; preserve dense detail when fidelity is limiting; reconstruct activations when the training tape dominates; and evaluate storage, addressing, and self-fed reuse as distinct failure modes.

Keywords: systems analysis; hierarchical video generation; long-horizon video prediction; context packaging; memory horizon; temporal consistency; reversible computation; activation memory; diffusion transformer; autoregressive prediction; geometric observability; clip-cluster inference.

3. Applicant's Publications

The following stable labels are used throughout the dissertation:

- **[A1]** — Kulyk L. R., Mokin O. B. “Scaling Video Prediction with Spatio-Temporal Patches,” *Visnyk of Vinnytsia Politechnical Institute*, 2025, No. 5, pp. 129–139, DOI 10.31649/1997-9266-2025-182-5-129-139.
- **[A2]** — Kulyk L. “Temporal modeling with reversible transformers” (TempVerseFormer), *Neural Computing and Applications*, 2026, Vol. 38, article 30, DOI 10.1007/s00521-025-11707-3, sole author, Scopus-indexed.
- **[A3]** — Kulyk L. R., Mokin O. B. “Methods for Ensuring Consistent Generation in Diffusion Models,” *Visnyk of Vinnytsia Politechnical Institute*, 2024, No. 4, pp. 75–85, DOI 10.31649/1997-9266-2024-175-4-75-85.
- **[A4]** — the fourth article, *When Does Hierarchical Video Memory Pay? Reach–Fidelity Trade-offs under Fixed Context Budgets*, in finalization. **[AUTHOR: supply target venue and status at submission/defence.]**
- Six conference theses. **[AUTHOR: supply the six verified bibliographic entries.]**

Publication-administration facts that cannot be established from the scientific repository are collected in `docs/dissertation/AUTHOR_INPUT_CHECKLIST.md`; they must not be inferred.

4. Symbols and Abbreviations

Abbreviation	Expansion
VNTU	Vinnytsia National Technical University
AE	Autoencoder
AR	Autoregressive
BPTT	Backpropagation Through Time
CI	Confidence Interval
CRN	Common Random Numbers
DDIM	Denoising Diffusion Implicit Models
DDPM	Denoising Diffusion Probabilistic Models
DiT	Diffusion Transformer
EBM	Energy-Based Model
EBT	Energy-Based Transformer
EMA	Exponential Moving Average
FID	Fréchet Inception Distance
FVD	Fréchet Video Distance

Abbreviation	Expansion
fg-MSE	Foreground Mean Squared Error
GPU	Graphics Processing Unit
LPIPS	Learned Perceptual Image Patch Similarity
MCMC	Markov Chain Monte Carlo
MSE	Mean Squared Error
NFE	Number of Function Evaluations
OOM	Out of Memory
RoPE-ND	N-dimensional Rotary Positional Embedding
SSIM	Structural Similarity Index Measure
V-BLT	Video Byte-Latent Transformer
VAE	Variational Autoencoder

5. Table of Contents

The submission document must generate this list as a live table of contents with page numbers and cross-references:

1. Introduction.
2. Chapter 1. Systems Analysis of Hierarchical Video Generation and Its Consistency Criteria.
3. Chapter 2. Mathematical Methods for Uncertainty Estimation and Resource-Efficient Modelling of Multi-Step Video Processes.
4. Chapter 3. A Hierarchical Mathematical Model for Video Generation with Long Multi-Stream Context.
5. Chapter 4. Experimental Evaluation and Practical Application.
6. General Conclusions.
7. References.
8. Appendices: applicant publications; implementation acts; registered experimental configurations; supplementary evidence tables; and reproduction information.

Introduction

Relevance and Justification of the Research Topic

Video generation and prediction are multi-step processes in which spatial appearance, object identity, motion, scene geometry, and control signals must remain mutually consistent over time. Recurrent prediction, stochastic latent modelling, transformer-based generation, and diffusion have progressively improved short-horizon visual quality [1] [2] [3] [4]. Long-horizon use, however, introduces a systems problem: the generator must preserve information that may disappear from the current viewport, decide which detail should remain accessible, and propagate learning signals through an increasingly long computation.

From the viewpoint of systems analysis, a generative video model is a complex dynamic system with partially observed state, interacting representation levels, stochastic transitions, bounded resources, and multiple performance criteria. The relevant uncertainties are not only probabilistic. They include informational uncertainty about hidden content, structural uncertainty about the appropriate decomposition of state, algorithmic uncertainty about the generation mechanism, computational uncertainty about feasible horizons, and target uncertainty about which notion of consistency the task requires [5, 6, 7] [8, 9, 10, 11].

A common engineering response is to enlarge a flat spatio-temporal context. Standard dense self-attention has quadratic arithmetic in sequence length, while stored attention state and key–value caches grow with the number of retained tokens; memory-efficient implementations reduce data movement but do not make the choice of retained history irrelevant [12, 13] [14, 15, 16, 17, 18, 19]. Long-context video models therefore face an allocation problem: a fixed state budget can preserve many low-detail or sparse historical observations, or fewer dense high-detail observations [20] [21] [22, 23, 24].

Long self-fed rollout creates a second difficulty. A model trained predominantly on ground-truth-conditioned histories is evaluated on its own imperfect outputs; errors alter later inputs and can accumulate over time [25, 26] [27]. Extending the training horizon by ordinary backpropagation through time also stores intermediate activations whose memory grows with the differentiated process length [28] [29]. Gradient checkpointing trades recomputation for reduced activation storage, while reversible networks reconstruct intermediate states instead [30, 31] [32].

These pressures are often described collectively as a “memory problem,” but they act on different terms. The dissertation uses the conceptual decomposition

$$M_{\text{system}} = M_{\text{parameters}} + M_{\text{optimizer}} + M_{\text{context/state}} + M_{\text{activations}} + M_{\text{transient}}.$$

Hierarchical or multirate context packaging acts primarily on $M_{\text{context/state}}$: it changes how much historical state can be addressed under a fixed context budget. Reversible temporal computation acts primarily on $M_{\text{activations}}$: it reconstructs intermediate states during reverse replay instead of retaining the full activation tape. These mechanisms are complementary but separately measured. The dissertation does not assume that their savings multiply, and the final video predictor is not presented as an end-to-end combination of every dissertation strand. The shared systems principle is:

Compress what must be remembered; reconstruct what need not be stored.

This principle is used as an organising systems formulation rather than as a claim that every method was optimized jointly. Let $\mathcal{R}$ denote the representation and allocation rule, $\mathcal{P}$ the retained context package, and $\mathcal{A}$ the method used to differentiate through a temporal computation. The dissertation studies components of the constrained design problem

$$min_{\mathcal{R},\mathcal{P},\mathcal{A}}\mathbb{E}[\mathbf{L}_{\text{cons}}]\text{subject to}B_{\text{ctx}}(\mathcal{P}) \leq B, M_{\text{act}}(\mathcal{A}) \leq M, C_{\text{train/infer}} \leq C.$$

The vector $\mathbf{L}_{\text{cons}}$ collects the task-appropriate consistency endpoints rather than reducing every failure to one aggregate score. The representation strand informs $\mathcal{R}$, the context-packaging strand manipulates $\mathcal{P}$, the reversible-computation strand studies $\mathcal{A}$, and the criteria strand supplies the measurement and decision layer. These links are methodological. Their evidence remains study-specific; the dissertation therefore presents an integrated systems methodology, not one experimentally validated end-to-end model.

Four kinds of connection are distinguished throughout the dissertation. **Problem-level integration** means that all strands address resource-constrained modelling of long multi-step visual processes. **Methodological integration** means that each strand acts on a named resource, representation, or measurement term. **Evidentiary separation** means that every result retains its own population, comparator, and limitation. **Executable integration** is claimed only for components actually present in the Chapter 3 predictor. This vocabulary permits a coherent systems methodology without implying an unmeasured end-to-end model.

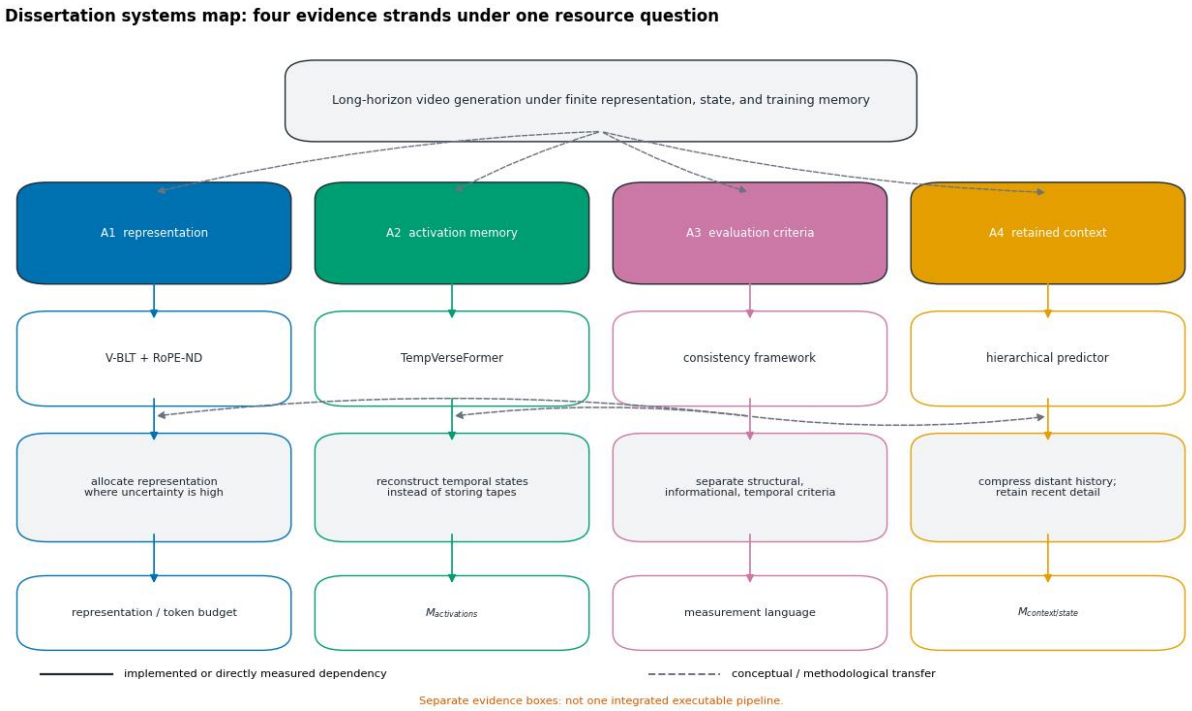


Figure I.1 — Dissertation systems map and evidence boundaries. A1 allocates representation capacity, A2 reconstructs temporal computations, A3 supplies the measurement language, and A4 allocates retained context. Solid links identify implemented or directly measured dependencies; dashed links identify conceptual or methodological transfer. The separate evidence boxes make explicit that the four strands answer one systems question without constituting one experimentally validated executable pipeline. Source: author's dissertation-level synthesis of [A1]–[A4].

The state-memory question also contains an information trade-off. A coarse, subsampled, or hierarchical package may extend addressable temporal reach but discard fine detail. A dense flat package may preserve identity and texture but cover a shorter history. Existing hierarchical and memory-augmented video models demonstrate that long history can be represented in several ways [33] [34] [20, 35, 36] [37], but cross-paper score comparisons do not isolate whether a difference is caused by reach, fidelity, target interface, sampler allocation, or evaluation population.

This dissertation therefore treats context packaging as a controlled design space and introduces a memory-horizon measurement instrument in which geometric observability at viewport re-entry is known exactly. The resulting empirical rule is deliberately conditional:

> **Hierarchy buys reach; flat context buys fidelity.**

The hierarchy is confirmed at tested budgets where a flat full-resolution window cannot address the relevant past. Flat context recovers at larger tested budgets and better preserves digit identity in a

persistent-object boundary study. This is not a universal architecture ranking; it locates operating regions and failure modes.

The relevance of the research follows from the need for methods that jointly:

1. decompose a complex video-generation process into measurable state, resource, and consistency components;
2. retain memory-relevant history under bounded context/state resources;
3. reduce the activation cost of long temporal optimization;
4. distinguish storage, addressing, fidelity, and self-fed reuse experimentally; and
5. provide an auditable software and evidence chain for claims about complex generative systems.

Relationship to Research Programmes, Plans and Topics

The dissertation was carried out in accordance with the research plans of Vinnytsia National Technical University, including the following state-budget research topics:

- Research topic No. **[AUTHOR: research-project number 1]**, *Development of Information Technologies and Mathematical Methods for Intelligent Analysis of Spatio-Temporal Data in Complex Systems* (2021–2023), within which the applicant developed adaptive estimation of spatio-temporal uncertainty and entropy-based tokenization of video data.
- Research topic No. **[AUTHOR: research-project number 2]**, *Systems Analysis and Modelling of Multi-Step Processes under Resource Constraints and Uncertainty* (2024–2026), within which the applicant developed reversible temporal optimization and the hierarchical video-generation model.

[AUTHOR: verify both approved project titles, numbers, dates, and the applicant's role against the official project reports.]

Aim and Research Tasks

The aim of the dissertation is to improve the resource efficiency and temporal and spatial consistency of hierarchical video-data generation processes through systems-analysis methods, mathematical models, and intelligent information technologies that separate context/state memory, activation memory, and task-dependent fidelity.

The following seven tasks are solved:

1. Analyze video-data generation as a complex dynamic system; classify its informational, structural-algorithmic, computational, and target uncertainties; and identify the resource and consistency limitations of flat long-context modelling.

2. Improve the criteria apparatus for generative processes by extending the taxonomy of conceptual, hierarchical, and trajectory consistency and by operationalizing trajectory consistency through measurable self-fed rollout and re-entry-stratified endpoints.
3. Develop a method for estimating spatio-temporal uncertainty through adaptive entropy-based decomposition and multidimensional rotary positional encoding.
4. Develop a reversible method for optimizing long multi-step temporal processes, extend it to stochastic multi-level recurrences, and delimit its applicability relative to backpropagation through time and gradient checkpointing.
5. Develop a mathematical model of multi-stream latent video generation whose context streams retain history at different temporal rates and spatial resolutions over a shared joint-attention backbone.
6. Create a research software toolkit and intelligent information technology for systems analysis of hierarchical video generation, including adaptive representation, reversible optimization, context packaging, provenance controls, the memory-horizon testbed, and re-entry-stratified evaluation. The modules are integrated at the methodology and software environment level; no claim is made that every module forms one measured end-to-end predictor.
7. Experimentally evaluate the developed methods on controlled and open datasets; compare generation mechanisms and context packages under declared budgets; measure memory use, uncertainty, consistency, and robustness; and determine the operating regions and limitations of the resulting methods.

The tasks correspond directly to the principal results and General Conclusions. The fourth article addresses the context-packaging part of Tasks 5–7; [A1], [A2], and [A3] support the representation, reversible-optimization, and consistency-criteria strands.

Contribution and Evidence Crosswalk

The contribution strands are connected at the problem and methodology levels, while their experimental evidence remains separate. The following crosswalk is the authoritative scope map used by the later chapters.

Strand	**Research problem**	**Intervention**	**System or resource term**	**Evidence and principal result**	**Boundary**	**Used in the final Chapter 3 predictor?**
[A1] V-BLT	non-uniform information density	entropy-guided adaptive decomposition	representation and capacity allocati	resources are allocated using measured spatio-temporal information structure	entropy is an informative proxy, not an automatically calibrated uncertainty estimate	no

Strand	Research problem	Intervention	System or resource term	Evidence and principal result	Boundary	Used in the final Chapter 3 predictor?
			on			
[A1] RoPE-ND	multi-axis positional structure	independent rotary coordinates	representation-coordinate interface	preserves explicit horizontal, vertical, and temporal coordinates in the tested variable-patch system	does not guarantee correct semantic routing or consistency	no
[A2] TempVerseFormer and dissertation extension	activation growth through long temporal differentiation	reversible temporal replay	activation-tape memory	reconstructs local states/graphs and keeps the measured activation-tape frontier approximately flat with horizon	replay noise/metadata and numerical stability remain separate costs; checkpointing is the practical comparator	no
[A3] consistency criteria	an overloaded and weakly operationalized notion of consistency	conceptual, hierarchical, and trajectory criteria	measurement and decision layer	trajectory consistency is operationalized through self-fed, re-entry, support, identity, miss/extra, and coverage endpoints	semantic proxies and architectural conditioning do not guarantee causal understanding or cross-level coherence	methodologically consumed by Chapters 3–4
[A4] hierarchical predictor	retaining distant evidence under a fixed context budget	flat, spatially hierarchical, and temporally sparse packages	context/state memory	establishes the tested reach–fidelity operating regions and external support–identity boundary	synthetic instruments, modest seed panels, and no universal hierarchy ranking	yes
Dissertation synthesis	auditable operating-region decisions	exact observability, clip-cluster inference, registered families, and provenance controls	evidence and system-control layer	links each claim to a population, intervention, uncertainty level, and decision boundary	an integrated methodology and toolkit, not one jointly validated executable pipeline	toolkit level

Object and Subject of Research

The object of research is the processes of systems analysis, mathematical modelling, and control of complex multi-level video-data generation systems under structural, informational, and computational uncertainty.

The subject of research is the mathematical models, methods, criteria, algorithms, and intelligent information technologies for uncertainty estimation, resource-efficient temporal optimization, hierarchical context representation, and consistency evaluation in generative video systems.

Research Methods

The research uses:

- systems-analysis and hierarchical-decomposition methods to define the system boundary, interacting state levels, uncertainty classes, resource terms, and evaluation criteria;
- information theory and entropy estimation for adaptive spatio-temporal decomposition;
- probability theory and stochastic-process models for diffusion, autoregressive rollout, and uncertainty analysis;
- tensor algebra, optimization, attention mechanisms, and deep learning for model construction and parameter identification;
- reversible computation, backpropagation through time, and checkpointing analysis for temporal activation-memory optimization;
- common random numbers, paired clip-level cluster bootstrap, training-seed summaries, and simultaneous max-statistic inference for registered comparison families;
- criteria-based decision rules, protected holdouts, content-addressed run specifications, and immutable artifacts for outcome-independent experimental control.

The statistical sampling unit is the clip. Frames remain inside a resampled clip because rollout errors are temporally dependent. Clip-cluster intervals condition on a trained model; training seeds form a separate uncertainty level. Null intervals are not interpreted as equivalence without a justified smallest effect of interest.

Scientific Novelty

The scientific novelty is scoped to the developed methods and controlled demonstrations rather than to the invention of hierarchical video models as a class.

1. **A controlled methodology for systems analysis of memory-dependent re-entry in budgeted video prediction is developed.** It combines a purpose-built memory-horizon testbed with exact geometric observability, pair-specific reach-differential populations, complete false-positive-sensitive endpoints, matched context-token comparisons, protected holdouts, and simultaneous

clip-cluster inference. Unlike aggregate evaluation, the methodology isolates records for which the longer package can address relevant history that the comparator cannot.

2. **A fixed-budget operating-region account of hierarchical video memory is established for the tested system.** Hierarchical packages are confirmed at 896 and 1,152 context tokens, the 1,792-token point is unresolved, and flat full-resolution packages are confirmed at 2,432 and 3,072. At equal nominal 48-frame reach, the confirmed hierarchical packages use 2.67–3.43 times fewer context tokens. The contribution is the controlled reach–fidelity measurement and tested bracket, not a universal hierarchy law or a unique continuous crossing.
3. **The dissertation's temporal-optimization line is extended with an algebraically reversible stochastic recurrence, stored-noise replay, and a three-axis applicability taxonomy.** The recurrence is reconstructed within reported numerical tolerances and its reverse-replay gradients are compared with BPTT in the tested stochastic multi-level process. The taxonomy distinguishes reversibility across depth, time, and computation and identifies checkpointing as the relevant practical comparator.
4. **The criteria apparatus for generative systems is improved** by formalizing conceptual, hierarchical, and trajectory consistency and connecting trajectory consistency to self-fed-rollout, object-support, re-entry, identity, miss/extra, and coverage endpoints.
5. **The entropy-based adaptive decomposition method is improved** through N-dimensional rotary positional encoding and spatio-temporal entropy maps, enabling resource allocation to high-information regions while preserving multi-axis positional structure.

Practical Significance

The practical result is a research software toolkit and evidence-controlled workflow that implements:

- entropy-guided adaptive decomposition and RoPE-ND experiments;
- reversible temporal blocks, reverse replay, and memory measurement;
- flat, hierarchical, and temporally sparse context packages;
- a shared latent diffusion-transformer predictor and regression/energy controls;
- the LoopMom memory-horizon generator, persistent-object Moving-MNIST generator, and complete frame/object metrics;
- fail-closed experiment authorization, content-addressed run specifications, dataset-purpose logging, immutable evidence artifacts, and generated tables.

The toolkit supports research and education in the modelling of long spatio-temporal processes. Its present evidence establishes controlled synthetic and benchmark boundaries; it does not by itself establish deployment effectiveness in medical, environmental, or safety-critical monitoring.

The reported implementation acts concern the reversible-transformer and entropy-tokenization strands:

- ORNETIKA LLC, Kyiv, implementation act dated 14 October 2025;

- the VNTU educational process for the disciplines *Information Technologies for Monitoring and Analysing the State of Complex Systems* and *Internet of Things and Intelligent Data Analysis*, implementation act dated 19 September 2025.

The final submission should reproduce the wording of those acts exactly in the appendices.

Reliability and Validation of the Results

Reliability is supported by analytical derivations, controlled synthetic instruments, protected and purpose-locked holdouts, multiple training seeds where registered, common-random-number paired evaluation, clip-cluster resampling, simultaneous inference, independent codec and sampler interventions, negative-replication reporting, hash-pinned datasets and artifacts, and executable CPU validation.

The central hierarchy result is limited to the tested representation, predictor family, budgets, and datasets. LoopMom is a mechanistic synthetic instrument rather than natural-video evidence. Persistent-object Moving-MNIST is a valid external synthetic boundary, not a replication of LoopMom's exact geometry. The reversible-memory result is independently measured and is not claimed as the cause of the context-package effects.

Personal Contribution of the Applicant

The applicant's contribution is separated by publication strand:

- In **[A1]**, the applicant developed and implemented entropy-based adaptive decomposition of spatio-temporal data, RoPE-ND, and the corresponding video-data experiments.
- In **[A2]**, a sole-author article, the applicant developed and mathematically substantiated TempVerseFormer and time-agnostic backpropagation based on reversible transformations.
- In **[A3]**, the applicant developed the consistency-criteria treatment used in the dissertation's systems-analysis framework.
- In **[A4]** and the associated dissertation programme, the applicant developed the controlled context-packaging study, hierarchical latent predictor, LoopMom instrument, pair-specific reach populations, persistent-object evaluation, experiment-control system, and the complete reach–fidelity evidence chain.
- The algebraically reversible stochastic recurrence, numerical replay validation, and applicability taxonomy are dissertation developments connected to, but separately scoped from, the published TempVerseFormer result.

For co-authored works, the final institutional version must reproduce the formally approved contribution statements.

Approbation and Publications

The main provisions and results were reported at six scientific conferences:

- 50th Scientific and Technical Conference of VNTU Departments, Vinnytsia, 2021;
- 51st Scientific and Technical Conference of VNTU Departments, Vinnytsia, 2022;
- *Problems of Higher Mathematical Education: Contemporary Challenges*, VNTU, Vinnytsia, 2022;
- 52nd Scientific and Technical Conference of VNTU Departments, Vinnytsia, 2023;
- 53rd Scientific and Technical Conference of VNTU Departments, Vinnytsia, 2024;
- Dynamical System Modeling and Stability Investigation (DSMSI-2023), Kyiv, 2023.

[AUTHOR: verify every event, date, contribution, and corresponding publication against the applicant's records.]

The dissertation currently records four article strands—[A1], [A2], [A3], and the fourth article [A4]—plus six conference theses. **[AUTHOR: supply the target venue/status of [A4], the six conference entries, and the institutionally approved publication count and categories.]**

Dissertation Structure and Volume

The dissertation consists of an Introduction, four chapters, chapter conclusions, General Conclusions, references, and appendices.

- **Chapter 1** analyses video generation as a complex hierarchical system, classifies its uncertainties and consistency criteria, reviews flat, hierarchical, memory-augmented, and energy-based approaches, and states the research tasks.
- **Chapter 2** develops entropy-based adaptive decomposition, RoPE-ND, reversible temporal transformations, time-agnostic backpropagation, the stochastic reversible recurrence, and the applicability boundary relative to checkpointing.
- **Chapter 3** develops the compact two-level latent state, joint-attention multi-stream predictor, v-parameterized window diffusion, autoregressive rollout, token-cost model, LoopMom instrument, complete endpoints, and clip-cluster inference.
- **Chapter 4** evaluates mechanism selection, untouched reach confirmation, the tested reach–fidelity frontier, package shape, robustness, negative replication, explicit access, the persistent-object boundary, practical implementation, and limitations.

Article [A4] is the empirical culmination of the dissertation's context-state and measurement arc: it connects the systems decomposition, the multi-stream context model, exact observability, trajectory-consistency endpoints, and operating-boundary inference. It is not the culmination by virtue of executing V-BLT, RoPE-ND, and reversible temporal training inside one predictor; those methods remain separately validated parts of the systems methodology.

The final page, figure, table, reference, and appendix counts must be inserted after institutional typesetting. **[AUTHOR: supply the final pagination and confirm the appendix set.]**

Chapter 1 — Systems Analysis of Hierarchical Video Generation and Its Consistency Criteria

1.1 Generative video models as complex control systems

The development of artificial-intelligence and machine-learning methods over the last decade has produced new classes of mathematical models capable of solving complex problems of data analysis, prediction, and synthesis. A special place among them is occupied by generative models, which have transformed from simple statistical tools into extremely complex multi-level information systems. Large generative models — including systems operating on spatio-temporal video data — can contain billions of parameters and require substantial computational resources [38]. Despite impressive visual results, their long-horizon state, resource, and failure behaviour is often difficult to characterize from aggregate output quality alone. Their learned components can be difficult to interpret, which complicates analysis of stability, predictability, and resource efficiency [39, 40].

To address these problems it is necessary to change the paradigm of perceiving generative algorithms and to consider them as open complex dynamic systems. In this formulation the process of video data generation is not merely a mathematical transformation of information but a purposeful process of changing the state of a complex system under control actions and the influence of the external environment. Iterative generative models — diffusion models [2], autoregressive systems, and energy-based models employing Markov chain Monte Carlo — can usefully be analysed as complex dynamic systems with state, inputs, outputs, feedback, and resource constraints.

A complex system controlling the process of video data generation is characterized by input actions, a state space, and output data. The input actions of such a system are the initial noise distribution, which plays the role of an entropy source, and a set of conditioning vectors (for example, textual descriptions, semantic masks, previous frames of the video sequence, or recorded control/action tracks), which play the role of control signals. The state space is the multidimensional latent or pixel space in which the system resides at every discrete moment of time. The output data is the final generated object, which must satisfy the specified criteria of quality and consistency. The scheme of a modern generative video model as an example of an open complex dynamic control system is shown in Fig. 1.1.

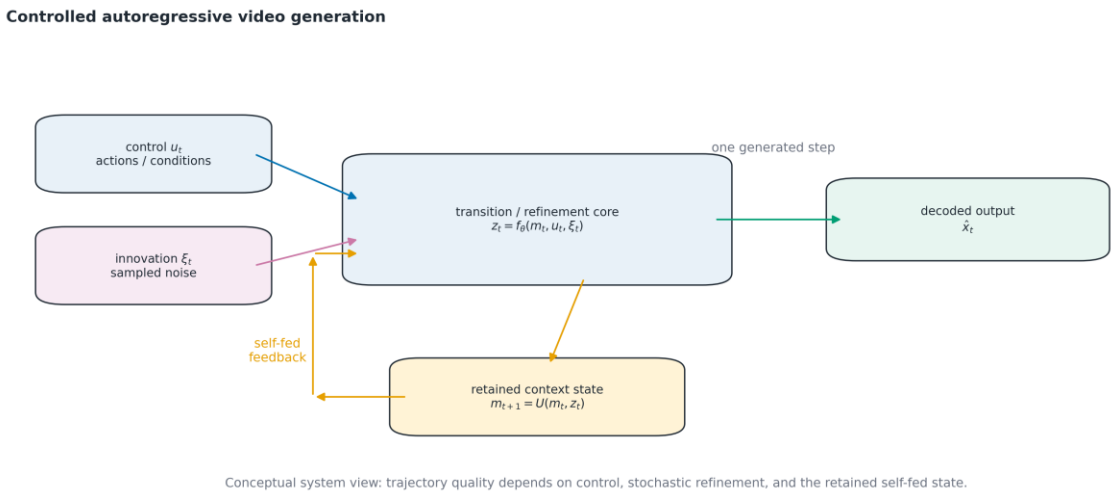


Figure 1.1 — Video generation as an open dynamic control system. Noise acts as an entropy source, previous frames and actions as control signals, and autoregressive feedback makes output quality a property of the complete self-fed trajectory. Source: author's schematic.

In accordance with classical systems theory [41], the object under study is characterized by a large number of interrelated elements, nonlinear interactions, emergence, and a hierarchical structure. In the context of computer vision the elements of the system are individual pixels or latent features (tokens). Their interaction is provided by attention mechanisms and convolutional operations, which model spatio-temporal correlations. Nonlinearity is achieved through nonlinear activation functions in the artificial neural networks that form the core of the system.

An important characteristic of such a system is the iterative nature of its state transitions. Unlike common GAN [42] or VAE [43] decoders, which synthesize an output through one feed-forward inference path, iterative models such as denoising diffusion probabilistic models (DDPM) [2] explicitly decompose sampling into many state transitions. This approach fundamentally changes the mathematical nature of the system: the state evolves in time (or in the pseudo-time of optimization steps), and every next state depends on the previous one, the current parameters, and the control action.

Mathematically, the evolution of the state of such a system can be written as a controlled Markov transition:

$$z_{s+1} = f_\theta(z_s, a_s, c, \xi_s) \tag{1.1}$$

where z_s is the system state (a multidimensional tensor of video data or its latent representation) at a generic transition index s; a_s is an admissible decision or scheduled control action; c is fixed exogenous conditioning; θ denotes the learned parameters; ξ_s is a stochastic input; and f_θ is the nonlinear state-

transition map. The generic index s is used here deliberately. In the temporal decomposition below, t is reserved for physical video time and k for refinement or sampling pseudo-time.

When the stochastic component ξ_s is present, the transition samples from a conditional distribution; deterministic samplers correspond to a fixed or zero stochastic term. Systems methodology under risk and uncertainty [5, 6] motivates tracking how initial state, conditioning, sampling, and feedback affect later outputs. In generative video, failures can appear as visual artifacts, temporal discontinuities, or violations of the intended scene dynamics.

Complex systems can be decomposed into interacting levels of detail or abstraction [7]. For video generation, a useful analytical decomposition distinguishes a **macro level** of scene composition and global relations, a **meso level** of geometry and object structure, and a **micro level** of high-frequency appearance, lighting, and pixels. This is a modelling choice used to expose cross-level consistency requirements; it is not a claim that every implemented model contains three explicit modules.

Meaningful video depends on spatial and temporal relations across these descriptive scales. A failure of cross-scale coherence may, for example, place plausible texture on an inconsistent shape. Hierarchical consistency is therefore one component of stable generation, alongside temporal, trajectory, conceptual, and object-level criteria developed later in the chapter.

1.1.1 Generation as an optimal-control problem

Increasing model capacity and training data can improve generation, but it also raises training and inference cost and does not by itself identify which state or trajectory constraint is violated. This motivates a complementary control formulation of the generation trajectory.

Consider the generation path through the analytical lens of an optimal-control problem. At the initial control step $s = 0$, the state z_0 may be sampled from a noise distribution. At the final step $s = S$, the induced state z_S should satisfy the target and conditioning requirements. This is a systems-level abstraction: a trained sampler usually executes a learned transition under a fixed schedule rather than solving a new optimal-control problem online for every sample.

The formalization of this process requires a systemic criteria apparatus. Let $\mathbf{z} = (z_0, \dots, z_S)$ be an admissible state trajectory and $\mathbf{a} = (a_0, \dots, a_{S-1})$ its control sequence under fixed condition c. A **consistency criterion functional** can combine terminal and path costs. The corresponding constrained problem optimizes the controls and their induced trajectory, not an unconstrained terminal tensor:

$$(\mathbf{z}^*, \mathbf{a}^*) \in argmin_{\mathbf{z},\mathbf{a}} J(\mathbf{z}, \mathbf{a}; c) = argmin_{\mathbf{z},\mathbf{a}} [\Phi(z_S; c) + \sum_{s=0}^{S-1} \ell_s(z_s, a_s; c)] \text{subject to} z_{s+1} = f_\theta(z_s, a_s, c, \xi_s), (z_s, a_s) \in \mathcal{Z} \times \mathcal{A}. \quad (1.2)$$

Equation (1.2) is conditional on a fixed realization of ξ; a stochastic-control formulation instead minimizes the corresponding expected cost (or optimizes a feedback policy). Smaller values indicate lower measured inconsistency under the chosen functional; they do not by themselves establish perceptual realism or make every evaluation endpoint a training objective.

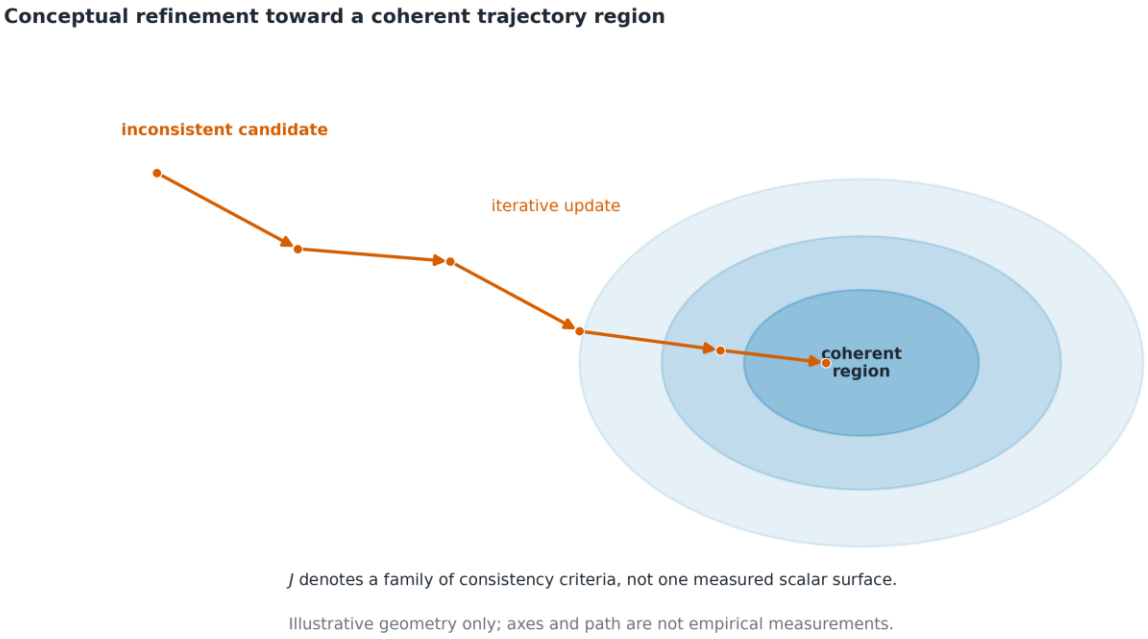


Figure 1.2 — Conceptual multi-step generation on the landscape of a consistency criterion. The trajectory moves from a high-criterion noise state toward a structured low-criterion region. This is a systems-level abstraction; only energy-based models instantiate the landscape as an explicit learned scalar energy. Source: author's schematic.

In the context of the intelligent information technology being developed, it is important to clearly delimit the roles of two fundamental system concepts: the **global consistency criterion** and **entropy**. The global criterion (1.2) is trajectory-level: it is a functional used to assess or design the entire multi-step generation trajectory; in this dissertation it is operationalized not by a learned scalar energy but by the measurable consistency criteria of §1.4—in particular the re-entry-stratified rollout metrics of §1.4.5, which evaluate the hierarchical model of Chapter 3 without being its direct training loss. Entropy, by contrast, acts as a **local diagnostic indicator**: the predictive entropy of a model-provided categorical distribution measures how dispersed that distribution is at specific spatio-temporal coordinates. In the reported V-BLT setting, entropy maps highlight locations that the model predicts less decisively and can therefore guide non-uniform allocation of limited computational resources (Chapter 2). Predictive entropy is not automatically a calibrated estimate of data uncertainty and can mix ambiguity, model

error, and miscalibration [44, 45]. It is therefore used here as an allocation proxy, not as evidence that the system "understands" the scene.

Controlling this system runs into **computational uncertainty** on two fronts. First, at the stage of parameter identification (training): a vanilla implementation of backpropagation through a long neural computation retains the intermediate activations needed by the reverse pass, so its activation tape grows with trajectory length. Checkpointing and reversible replay change this storage–recomputation schedule; Chapter 2 measures their operating regions rather than treating one method as universally required. Second, at the stage of operation (inference): extending the temporal context of a flat attention mechanism inflates its key–value memory linearly and its computation quadratically with context length (analyzed quantitatively in §1.3.1). Chapter 2 studies reversible replay as one storage–recomputation policy for the first front, alongside checkpointing. Chapter 3 studies hierarchical and sparse context packages as alternatives for the second front. The interventions act on different memory terms and are measured separately.

1.1.2 Applied domains

Beyond its theoretical significance, understanding generative video models as complex control systems has enormous practical importance for various applied fields. The tasks solved by such systems intertwine closely with the objects of study of the specialty "System Analysis".

The first important application domain is medical imaging and the development of intelligent systems for supporting clinical decision-making. Complex multidimensional spatial data (MRI, CT) can require reconstruction, super-resolution, or cross-modal generation. Distribution-matching reconstruction can add or suppress diagnostically relevant structures, so generated outputs need task-specific validation, uncertainty reporting, and clinical oversight rather than an assumed guarantee of structural faithfulness [46].

The second domain is ecological and technical monitoring using remote sensing data. Satellite data can contain gaps due to cloud cover or technical failures, motivating spatial or temporal imputation and forecasting. In applications such as fire-spread analysis, physical and terrain constraints are important evaluation or conditioning information; their satisfaction must be measured for the particular task and is not implied by visual plausibility alone [47, 48, 49].

The third domain is the creation of educational and training simulators (for example, for autonomous vehicle control systems). Training robots requires millions of hours of synthetic video data with diverse scenarios (including extreme ones). The requirement imposed on the generative system is long-term temporal coherence: objects cannot suddenly disappear, deform over time, or violate the logic of physical interactions. In particular, an object that leaves the camera's field of view should reappear in a

consistent state and position when the camera returns to it. In a controlled setting where the missing state cannot be inferred from recent frames alone, this requires retained or retrievable evidence spanning the relevant absence (§1.3.1 and §1.4.5).

The analysis of the listed practical domains shows that modern generative systems are subject to the following strict systemic requirements:

1. High visual quality and detail of the target data distribution;
2. Controllability of the system and the ability to respond to control actions;
3. Representations that preserve the cross-scale information needed by the task, whether learned implicitly or encoded through an explicit hierarchy;
4. Measured control of spatial, temporal, and logical anomalies — including over long horizons, when content leaves and re-enters the field of view;
5. Resource efficiency under constraints of computational memory;
6. Interpretability of the process.

Summarizing, empirical architecture search alone does not expose which state, resource, or trajectory constraint causes a failure. A complementary treatment of generative algorithms as complex dynamic systems therefore motivates a corresponding mathematical apparatus: methods of decomposition, identification of uncertainty types, explicit formalization and operationalization of consistency criteria, and creation of algorithms for optimal resource control. The following subsections of this research are devoted precisely to these questions.

1.2 Decomposition of the video generation system

The principal instrument of systems analysis in the study of complex systems is the method of decomposition — the division of an integral system into interrelated subsystems, elements, and couplings, with the aim of simplifying analysis and revealing deep properties and sources of uncertainty. For the multidimensional system controlling the process of video data generation it is expedient to apply several orthogonal kinds of decomposition: structural (functional), hierarchical (semantic), and temporal.

1.2.1 Structural decomposition

Structural (functional) decomposition treats the generative system as a set of functional information-processing blocks. In most modern architectures, irrespective of their mathematical basis, three basic macro-subsystems are distinguished [50].

The first subsystem is the **Encoder** — the block of condition preprocessing and encoding. Its function is to transform "raw" control signals (for example, a textual description, semantic masks, or the pixels of context video frames) into a formalized multidimensional feature space.

The second subsystem, the **Iterative Generator / Denoiser**, is the central block of iterative transformation. It is the mathematical core of the system, directly executing the state-transition equation and performing optimization or denoising steps in the feature space. This subsystem is responsible for eliminating the entropy of the initial state and forming a consistent structure.

The third subsystem, the **Decoder**, is the block of decoding and reconstruction, which translates the optimized latent state of the system back into the space of human perception (the pixel space of an image or video stream).

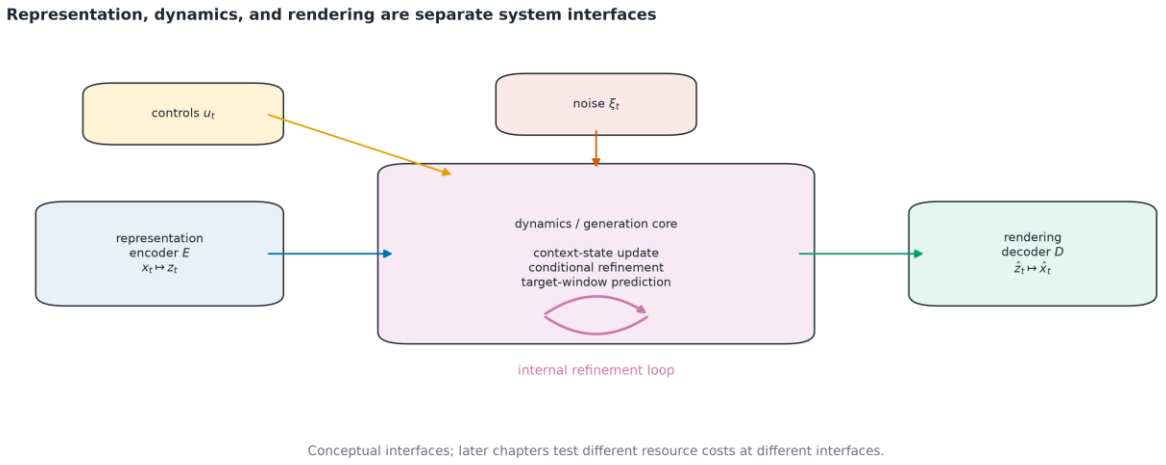


Figure 1.3 — Structural decomposition of the video-generation system. The encoder and decoder define the representation interface; the central predictor carries the controlled state transition and iterative refinement. Source: author's schematic.

Of greatest interest for systems analysis is the central subsystem, since it is where the state-control process takes place and the principal work of overcoming uncertainty is concentrated. Its detailed study requires the deeper kinds of decomposition that follow.

1.2.2 Hierarchical decomposition of the state space

Many complex systems admit useful descriptions at several spatial or semantic scales [7]. For video generation, an explicit macro/meso/micro decomposition is therefore a testable **inductive bias and resource-allocation strategy**, not a logical requirement: a single latent grid can learn multiscale features, while an explicit hierarchy makes the allocation between coarse reach and fine detail directly controllable.

At the **macro level** (the level of highest abstraction) the system operates with semantic vectors of low spatial resolution but high semantic saturation. Here the questions of conceptual composition are

decided: the presence of objects, their mutual arrangement, and correspondence to the specified condition.

At the **meso level** of abstraction (medium resolution) the system forms structural contours, geometry, and the spatial relations of object parts.

At the **micro level** (high resolution) the questions of local pixel organization are decided: the coherence of textures, lighting, and micro-details.

Many modern generative systems — for example, diffusion models built over variational autoencoders [3, 43] — operate on one explicit latent grid. Such a model can still learn multiscale internal features, but it offers no explicit interface for assigning different context horizons or token rates to those scales. Joint coarse and fine decisions can also conflict in practice; the brick-texture/wood-shape example below illustrates a failure mode, not a causal diagnosis that follows from using a flat grid.

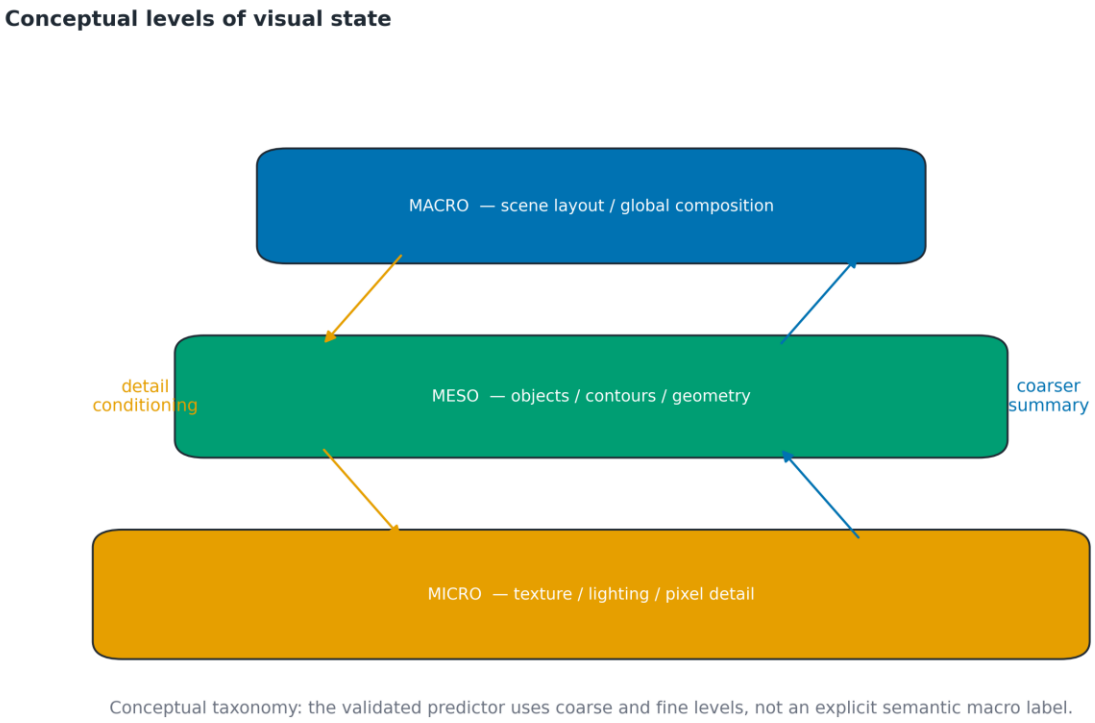


Figure 1.4 — Hierarchical decomposition of visual state. Macro denotes the highest abstraction and lowest spatial rate; micro denotes the pixel-proximal level and highest detail. Source: author's schematic.

The systems approach motivates mathematical models of explicit hierarchical decomposition with mechanisms that **bias and measure** coherence between these levels of representation. Such a model cannot guarantee coherence by structure alone. This decomposition is the core of the present

dissertation's topic. Moreover — a property central to the direction developed in Chapters 2–4 — an explicitly decomposed hierarchy allows the levels to run at *different temporal rates and context lengths*: a compact upper (coarse) level with a low information rate can afford to retain a long temporal context at the same memory budget for which a flat single-level representation affords only a short one, and can therefore serve as the carrier of the system's long-range temporal memory (quantified in §1.3.1 and developed in Chapter 3).

1.2.3 Temporal decomposition

A third useful analytical stratification is temporal decomposition. When modeling systems that generate video data, two distinct axes should be separated, creating a "two-dimensional temporal grid" for the analysis that follows.

The first dimension concerns the internal **pseudo-time** of the generation process — the partition of the continuous process of state change into discrete refinement steps $k = 1, \dots, K$ *per generated frame*: the steps of the reverse diffusion process, the token steps of an autoregressive decoder, or the descent steps of an energy-based sampler. Every such step is a micro-transition of the system in phase space. The algorithm is designed to move toward a more probable or lower-objective state, but monotonic entropy reduction or consistency improvement is not guaranteed for every realized trajectory.

The second dimension is introduced upon the transition to processing video sequences and reflects the **physical time axis** $t = 1, \dots, T$, where every discrete slice is a separate frame. The complexity of system control lies in the fact that the generative model must simultaneously ensure stability in both temporal dimensions: the system state must evolve correctly along the optimization axis k for every individual frame, and at the same time all generated frames must be spatio-temporally coherent along the physical axis t, forming smooth motion kinematics.

The physical axis, in turn, gives rise to a key quantitative characteristic of this dissertation: the **explicit context reach** — the maximal temporal distance Δt represented directly by an item in the configured context package. For a system whose central subsystem receives only a flat window of w preceding frames, this package-addressable reach is bounded by w. An event older than the window (for example, content that left the field of view and returns later) has no explicit source-frame token in that interface. This is not an information-theoretic inaccessibility claim: evidence may persist indirectly in recent observations, learned weights, or another recurrent or retrieved state if the architecture supplies one.

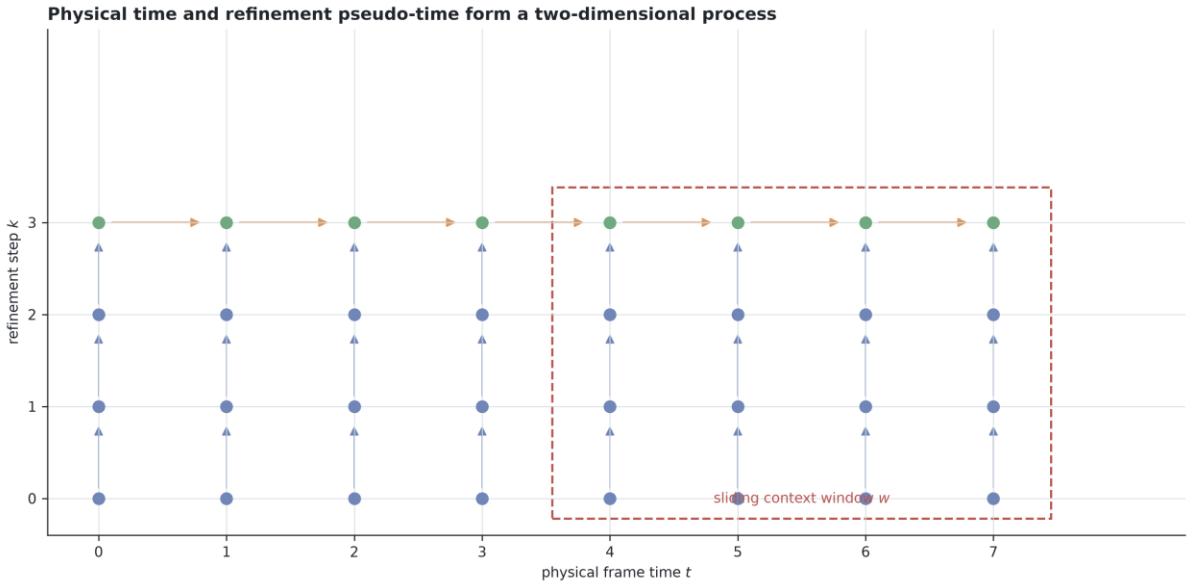


Figure 1.5 — Two-dimensional temporal decomposition of video generation. Horizontal transitions advance physical frame time, vertical transitions refine each predicted state, and the sliding context window bounds directly addressable history. Source: author's schematic.

1.2.4 Classification of uncertainty types

The performed decomposition of the complex system permits a classification of the kinds of uncertainty arising in it. In accordance with the theory of systems analysis of complex systems under risk [5, 6] and system methodology [5, 6], uncertainties are classified by source and nature. In the video generation system under study, four principal kinds of uncertainty are distinguished: informational, structural-algorithmic, computational, and target uncertainty.

Informational uncertainty is conditioned by the very nature of the iterative generative process, which begins from a state of pure noise (the state of maximal entropy). Moreover, informational uncertainty is commonly present in the control actions. For example, the textual description "a car drives along a road" or a coarse semantic mask is usually incomplete: it specifies only boundary macro-conditions, leaving a multitude of micro-details (the shape of the headlights, the texture of the asphalt, the lighting) undescribed. The task of the complex system is the correct and plausible resolution of this uncertainty during generation. If the system completes the missing information incorrectly, "hallucinations" and anomalies arise, rendering the result inconsistent [51].

Structural-algorithmic uncertainty is connected with limitations and inductive biases of the mathematical apparatus itself (the neural network). Implemented models have finite capacity. A separate manifestation of this uncertainty is the problem of spatio-temporal tokenization. Standard

transformer architectures (ViT, ViViT) partition the image into a regular grid of fixed-size patches, ignoring the fact that the visual signal has non-uniform information density.

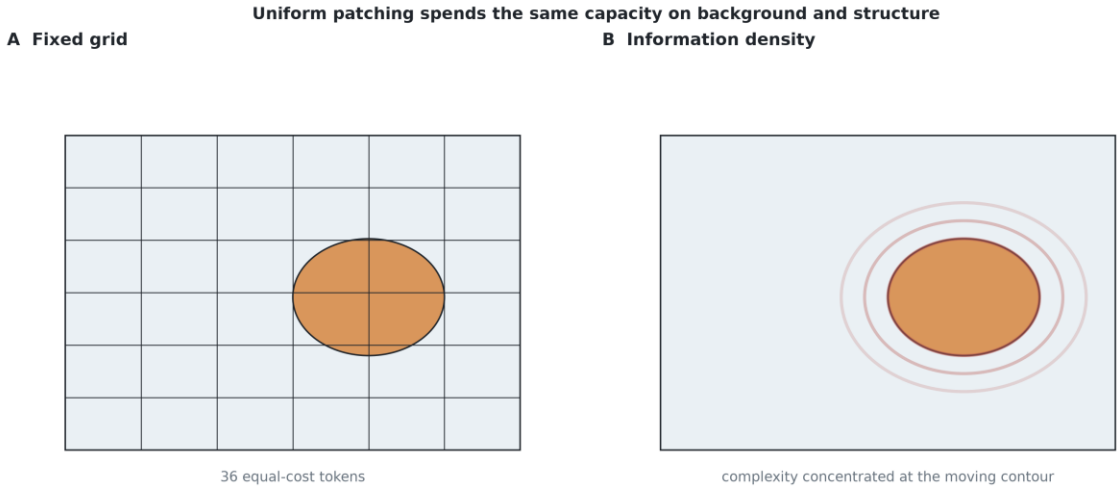


Figure 1.6 — Fixed-grid tokenization under non-uniform information density. Equal-size patches assign equal token cost to static background and to high-information moving contours. Source: author's schematic.

Uniform allocation can be inefficient when large low-variation regions and small high-detail moving regions have different representational requirements. This motivates—not logically requires—adaptive tokenization based on local entropy, developed and evaluated in Chapter 2.

Computational uncertainty is the most critical for iterative multi-step models. It arises on two fronts, corresponding to the two temporal axes of §1.2.3. On the training front, a vanilla autograd realization of backpropagation through time stores intermediate activations for the unrolled process; the resulting horizon-dependent activation tape can exceed available hardware memory. Checkpointing and reversible replay reduce this term through recomputation rather than changing the underlying gradient objective. Truncating the differentiated trajectory removes gradient paths beyond the selected horizon and may therefore impair learning of long-range effects. On the operation front, the flat attention context over the physical time axis inflates the key–value memory linearly and the computation quadratically with the number of context tokens (§1.3.1, eq. (1.7)), so the package-addressable reach of a dense flat interface is capped by its token and hardware budget precisely in the regimes where longer explicit history is required. Reducing memory consumption for gradient computation along deep trajectories and for context retention along long horizons is therefore an important design objective for multi-step generative systems.

Target uncertainty arises when the criterion optimized by the model during training does not coincide with the global goal during generation. For example, diffusion models optimize the local error of noise

prediction at one isolated step, but during generation these steps are chained into a long sequence in which errors accumulate. This local-versus-trajectory mismatch can leave terminal rollout quality only indirectly optimized.

The performed multidimensional decomposition of the video generation control system and the classification of the identified kinds of uncertainty form a clear methodological basis for the further research. This decomposition shows why improving one architectural element or one aggregate metric need not resolve the complete consistency problem.

The dissertation therefore investigates a combined methodological toolkit comprising: methods of adaptive entropy-based state estimation for resolving spatial uncertainty; resource-saving algorithms based on reversible computation for overcoming computational uncertainty; and the creation of a new **hierarchical control apparatus over compact continuous hierarchical latent state spaces** for measuring and reducing structural and target uncertainty.

The next subsection conducts a detailed critical analysis of existing approaches to the mathematical modeling of visual data — diffusion, hierarchical latent and autoregressive, and energy-based models — with the aim of identifying their strengths and their fundamental systemic limitations in the context of the requirements formulated above.

1.3 Analysis of existing approaches

To solve the posed problems of systems analysis and to construct an intelligent information technology of video data generation, a thorough critical review of the existing mathematical approaches to modeling complex multimodal spatio-temporal distributions is necessary. The modern scientific landscape offers several competing paradigms, each with its own architectural features, advantages, and limitations. This subsection reviews three classes of models **in the order dictated by the argument of this dissertation**: (i) diffusion models — one major route to high generation quality, with costly dense long-context variants; (ii) hierarchical latent and autoregressive approaches — a possible remedy direction, within which the choice between discrete and continuous latent spaces is examined; (iii) energy-based models — reviewed as literature together with the resource-efficiency methods they motivated. The focus criteria are systemic consistency and resource control.

1.3.1 Diffusion models: generation quality and the flat long-context barrier

Denoising diffusion probabilistic models (DDPM) [2] and deterministic/non-Markovian samplers such as DDIM [52] are major approaches to high-quality image and video generation. Unlike a GAN generator [42], which maps noise to data through one learned forward path, diffusion models use an explicitly iterative denoising process.

The mathematical basis of the diffusion approach rests on concepts of non-equilibrium thermodynamics. The modeling process is decomposed into forward corruption and a learned reverse process. In equations (1.3)–(1.6), k denotes diffusion pseudo-time; it must not be confused with the physical video-frame index t introduced in §1.2.3.

The forward diffusion stage is fixed and consists in the gradual addition of Gaussian noise to the original "clean" data sample x_0, progressively driving it to the state of random noise x_K. The process is modeled as a Markov chain:

$$q(x_k \mid x_{k-1}) = \mathcal{N}\left(x_k; \sqrt{1-\beta_k}x_{k-1}, \beta_k \mathbf{I}\right) \tag{1.3}$$

where β_k is a predetermined deterministic schedule of noise variance at step k. A mathematical advantage of this construction is the closed-form availability of the noised state at an arbitrary step directly from the original state:

$$q(x_k \mid x_0) = \mathcal{N}\left(x_k; \sqrt{\overline{\alpha}_k}x_0, (1-\overline{\alpha}_k)\mathbf{I}\right) \tag{1.4}$$

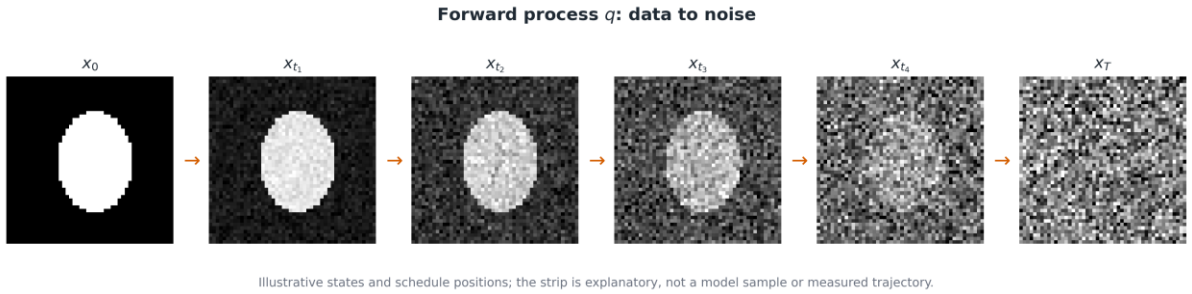


Figure 1.7 — Forward diffusion. Progressive Gaussian corruption destroys the information structure of a sample from x_0 toward x_K. Source: author's schematic.

At the reverse diffusion stage the system learns to invert this process, denoising the corrupted sample and restoring the data. Unlike forward diffusion, the reverse process constitutes a complex computational problem solved by deep neural networks:

$$p_\theta(x_{k-1} \mid x_k) = \mathcal{N}\left(x_{k-1}; \mu_\theta(x_k, k), \Sigma_\theta(x_k, k)\right) \tag{1.5}$$

In practice the model is optimized to predict the added noise ϵ via the simplified loss:

$$L_{\text{simple}} = \mathbb{E}_{x_0,\epsilon,k}\left[\left\|\epsilon - \epsilon_\theta(\sqrt{\overline{\alpha}_k}x_0 + \sqrt{1-\overline{\alpha}_k}\epsilon, k)\right\|^2\right] \tag{1.6}$$

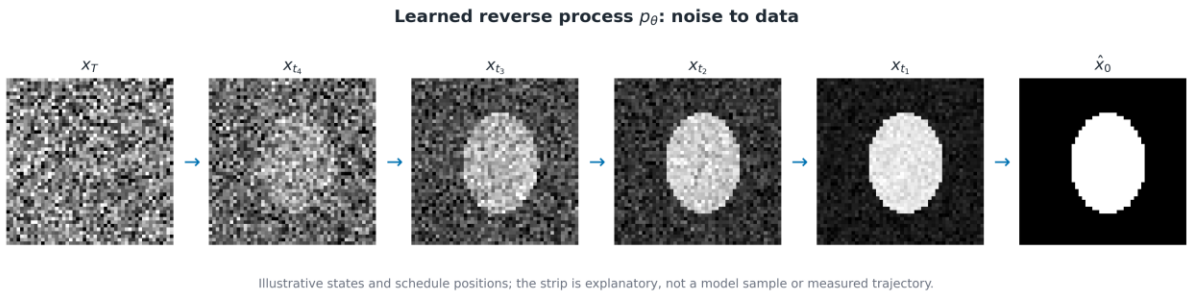


Figure 1.8 — Reverse diffusion. A learned denoising field iteratively restores structure from noise. The sequence is conceptual and does not depict an experimental sample. Source: author's schematic.

The forward–reverse construction supports high-quality synthesis by turning sampling into a sequence of denoising decisions. Pixel-space diffusion is expensive at high spatial resolution; latent diffusion models (LDM) [3] reduce this cost by operating in a compressed autoencoder space. Diffusion Transformers (DiT) [4] provide a transformer alternative to convolutional denoisers, and video systems such as Sora [53] operate on spatio-temporal latent patches at substantially larger data and model scales.

Modern video diffusion and token generators extend this lineage through spatio-temporal denoising, latent video diffusion, large-scale video pretraining, variable-length token generation, and masked video transformers [54, 55, 56, 57, 58, 59, 60, 61]. Interactive and autonomous world models further shift evaluation from isolated clips toward action-conditioned state prediction and control [62, 63, 64, 65, 66, 67]. These systems establish the scale and practical importance of the problem, but they do not remove the need to measure which historical information is retained under a bounded state interface.

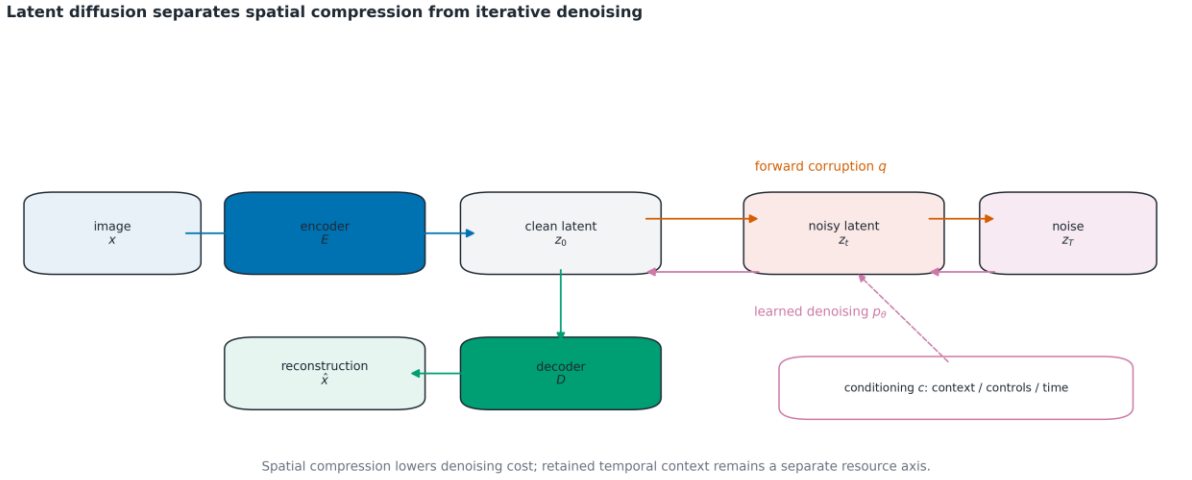


Figure 1.9 — Latent-space diffusion. Spatial compression reduces the per-step denoising cost, but it does not by itself solve the temporal-memory allocation problem. Source: author's schematic.

Despite their generation quality, dense-context diffusion video systems retain resource and long-horizon limitations that are the direct object of this dissertation's analysis. **The paradigm-level strengths of iterative refinement are not in question here**. Chapter 4 selects diffusion for the stochastic generative frontier because of its single-window coverage and sharp commitment under the controlled mechanism study. The same study also shows that regression is stronger in the deterministic best-of-1 self-fed rollout. The mechanism decision is therefore task-dependent; the context question studied later is *how temporal evidence is represented and scaled* within the selected generative evaluation programme.

One limitation of a **flat, single-level latent interface** is that global composition and local appearance share one token field. This does not make inconsistency inevitable, but it prevents explicit budget allocation and separate control across representation levels.

The second limitation is the **resource blow-up of flat long-context attention**. To lengthen the explicit history span of a flat video transformer without another memory mechanism, its spatio-temporal token context must grow. For a context of T_w frames tokenized at N_s spatial tokens per frame, the attention context length is $L = T_w \cdot N_s$, and the principal costs of the attention mechanism scale as

$$C_{\text{compute}} = O(L^2 \cdot D) = O(T_w^2 N_s^2 D), M_{\text{KV}} = O(L \cdot D) = O(T_w N_s D) \tag{1.7}$$

where D is the model width. For a standard dense attention layer, attention arithmetic grows quadratically with context length; when past keys and values are cached, cache storage grows linearly. Kernel improvements can reduce data movement and constants but do not remove the need to choose which historical tokens remain in the state interface.

The third limitation is the **degradation of long-horizon temporal consistency** even where a long flat context is affordable. Empirical evaluations of long-video generators and world models show that content which leaves the field of view is not restored consistently upon its return, and that consistency metrics degrade with the distance to the relevant past [68, 22, 24, 23]. In systems-analysis terms, the flat context window imposes a hard bound on explicit package reach (§1.2.3): source-frame tokens older than the window are absent from that context interface. This does not rule out indirect evidence in recent frames, model weights, or a separate state mechanism. Related to this is **target uncertainty**: during training the model optimizes the local error of one isolated step, while during generation errors accumulate along the whole autoregressive chain — the phenomenon of exposure bias [25, 26].

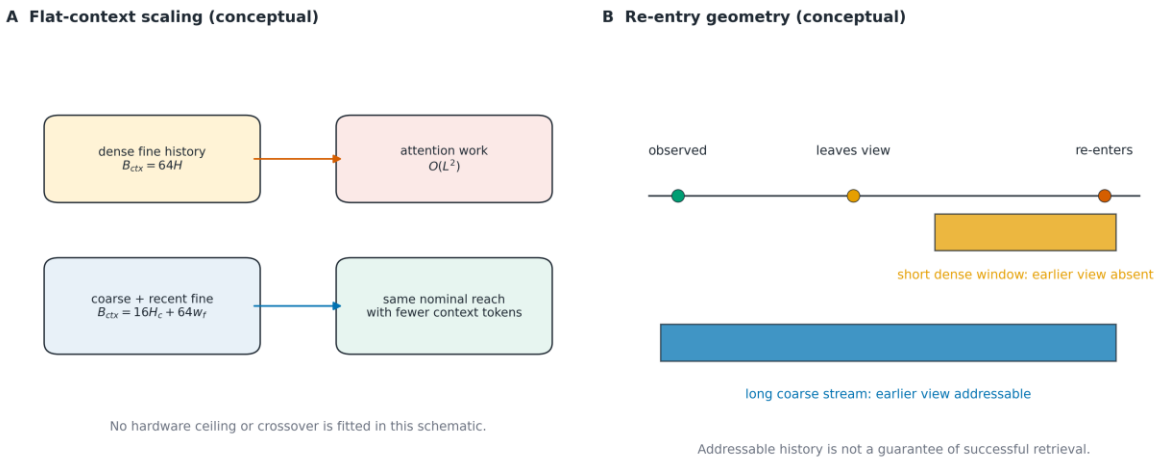


Figure 1.10 — Flat long-context resource and re-entry barrier. Panel A is schematic rather than a hardware benchmark: key–value memory grows linearly and attention work quadratically with sequence length. Panel B shows why a low-rate long-memory stream can remain addressable after the relevant content has left a short flat window. Source: author's schematic.

1.3.2 Hierarchical latent approaches and autoregressive prediction

The remedy direction for the contradictions of §1.3.1 is formed by approaches that (i) treat video prediction autoregressively along the physical time axis and (ii) decompose the latent state space instead of flattening it. This subsection reviews the components of that direction: patch-based autoregressive transformers, discrete-token models, and hierarchical latent models — and motivates, by the author's own measurements, the choice of *continuous* hierarchical latent spaces made in this work.

Patch-based autoregressive transformers. This line of work originates in the transfer of natural-language-processing principles to computer vision. The standard approach, popularized by the Vision Transformer (ViT) [69] and its video adaptations ViViT [70] and Video Swin Transformer [71], partitions the video into a grid of non-overlapping spatio-temporal patches that are linearized and fed to a transformer. The principal advantage of transformer models is their capacity to model long-range dependencies between distant regions of the video; their principal cost is exactly the quadratic attention complexity (1.7). Although Video Swin partially mitigates it with local attention windows, the fundamental limitation — a single-level latent space with fixed patching — remains. Fixed-grid tokenization is a form of rigid, content-blind discretization: static low-information background and dynamic scene regions receive equal computational budgets, which §1.2.4 identified as a source of structural-algorithmic uncertainty. An analogous problem in language modeling was resolved by the Byte Latent Transformer (BLT) [72], which groups bytes into latent patches of variable size governed by information density (entropy). Transferring this paradigm to the visual modality resolves the rigid-

tokenization component of structural uncertainty; the V-BLT architecture developed in this dissertation realizes that transfer and is presented in Chapter 2.

Discrete-token autoregressive models. A prominent branch of autoregressive video modeling operates over *discrete* latent spaces: a vector-quantized autoencoder (VQ-VAE) [73] compresses frames into grids of codebook indices, over which an autoregressive transformer learns the video distribution — the VideoGPT line [74] and its successors, including long-video architectures with compressed memory [36]. The attraction of this paradigm is genuine: discrete tokens give a clean autoregressive likelihood, natural compatibility with language-model tooling, and strong compression.

Discrete bottlenecks also introduce specific optimization risks—straight-through assignment, codebook underutilization, dead codes and level collapse—that are documented in the VQ literature [73, 74]. The implemented fourth-article system therefore uses **compact continuous hierarchical latent state spaces**, in which both levels are end-to-end differentiable and independently decodable. This is an implementation choice, not an empirical conclusion that continuous representations are universally superior: the present repository contains no controlled hierarchical-VQ-versus-continuous comparison and makes no such claim. Representation sensitivity is instead tested within the continuous-codec family by the pre-registered alternate-codec-seed study in Chapter 4.

Hierarchical latent variables are themselves a broad prior lineage, including deep vector-quantized and variational hierarchies [75, 76, 77, 78]. The dissertation therefore assigns novelty to its systems methodology and controlled video-memory demonstration, not to the general idea of arranging latent variables at multiple levels.

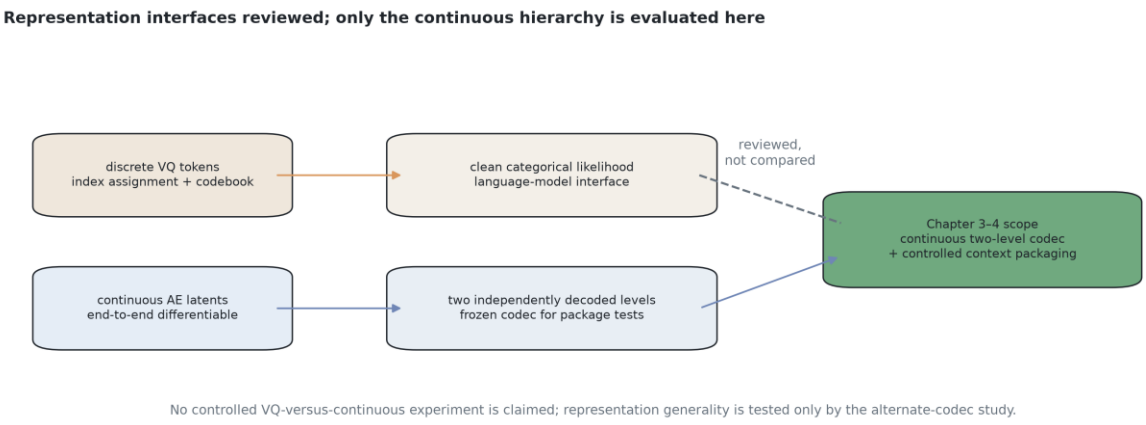


Figure 1.11 — Representation interfaces and the evidence boundary of this dissertation. Discrete VQ models are reviewed as an important autoregressive family; the controlled experiments use a continuous two-level codec. The dashed path denotes a comparison not performed here. Source: author's schematic.

Hierarchical latent video models. The direct remedy for the flat-latent limitation is the class of models whose latent state space is explicitly multi-level, with distinct temporal or spatial rates per level. Early representatives use multi-rate recurrent latents — clockwork variational hierarchies [20] — where upper levels tick more slowly and thereby retain longer temporal context. The modern form of this idea in the diffusion family is the hierarchical latent video diffusion model of the MilliVid class [37]: a compact hierarchy of continuous latents (a low-rate *coarse* level and a high-rate *fine* level, each independently decodable to pixels), a diffusion core that denoises the levels jointly with cross-level attention, and autoregressive rollout along physical time. The systemic significance of this spatial construction follows directly from eq. (1.7): because the coarse level carries far fewer tokens per frame than the fine level, a *heterogeneous* context — long in coarse tokens, short in fine tokens — covers a memory horizon many times longer than a flat context of the same total token budget. Hierarchy therefore reduces the rate at which token count grows with temporal reach and can cover more frames at fixed L; it does **not** change the $O(L^2 D)$ asymptotic cost of dense self-attention in the retained token count. The coarse level is an economical carrier of long-range temporal evidence because its per-frame token slope is smaller. Temporal subsampling provides a distinct route to the same span and is compared directly in Chapter 4. *(Chapter 3 develops the spatial form with a two-level continuous latent interface, asymmetric long-range history allocation, and bidirectional joint attention between target levels; Chapter 4 treats it as one point in the broader context-packaging design space.)*

Recent work broadens the design space beyond hierarchical latent state. WorldPack compresses and retrieves trajectory memory; CaR/SceneFly and MemLearner study implicit or learned retrieval; GIM-World introduces geometry-aware memory; and MBench and MemoBench construct explicit long-memory evaluation tasks [23, 79, 80, 81, 82, 83, 22]. These papers make architecture-level novelty untenable for generic “video memory.” The dissertation’s novelty is instead the controlled package-by-budget intervention, exact LoopMom observability, pair-specific reach populations, tested lower and upper inversions, and outcome-independent simultaneous inference.

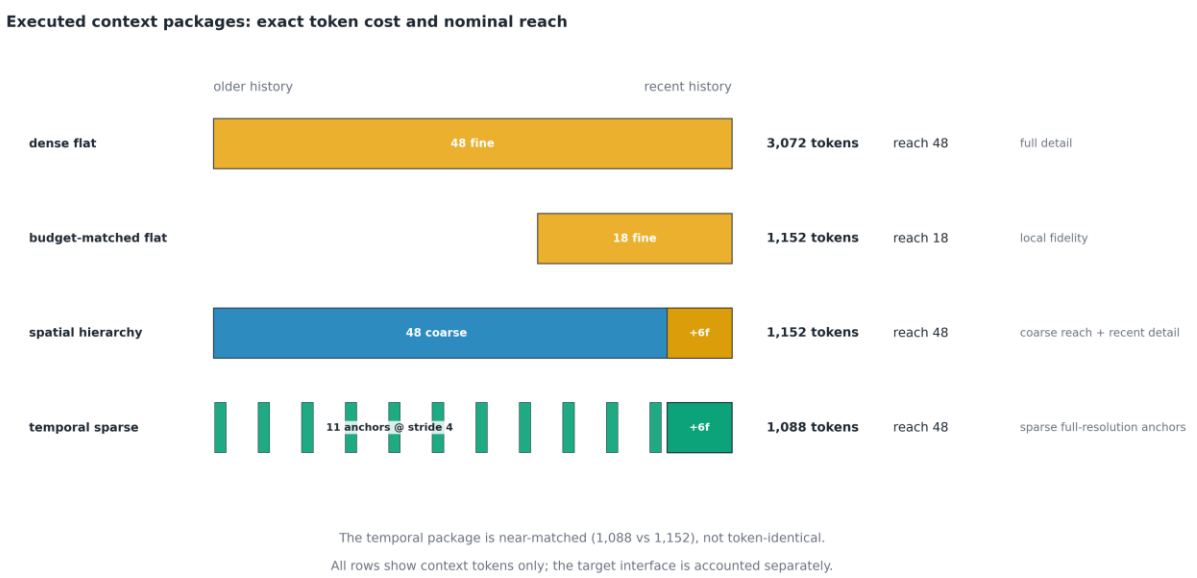


Figure 1.12 — Context packages allocate equal capacity differently across reach and fidelity. Flat contiguous, spatially hierarchical and temporally strided packages feed the same predictor family; the exact experimental token counts and target interfaces are reported in Chapters 3–4. Source: author's schematic. Formally, the hierarchical factorization of the video distribution replaces the flat conditional $p_\theta(x_t \mid x_{t-w:t-1})$ with a level-decomposed conditional of the form

$$p_\theta\left(z_t^c, z_t^f | z_{t-w_c:t-1}^c, z_{t-w_f:t-1}^f, u_t\right), w_c \gg w_f \tag{1.8}$$

where z^c and z^f are the coarse- and fine-level latent states, w_c and w_f their context windows, and u_t the control signals; the asymmetry $w_c \gg w_f$ at a matched token budget $w_c N_s^c + w_f N_s^f \approx \text{const}$ is what extends the explicit context reach without the flat blow-up (1.7).

Methodology for comparing hierarchical configurations. The canonical comparison methodology of this class is the Clockwork-VAE benchmark [20]: one configuration table over several datasets and metrics, quality-retention curves over long open-loop rollouts, and level-content probes (an upper level following its prior while lower levels see the context). The dissertation adopts this *format* in §4.4 while tightening three controls the original lacks — a systems-analysis point in its own right. First, capacity: the compared CW-VAE-class models differ in parameter count (their RSSM baseline 5M vs CW-VAE 12M; only the NoTmpAbs ablation is matched), whereas in the token-stream architecture of Chapter 3 depth adds tokens to a shared backbone with only per-level I/O heads (+1.4% parameters, disclosed) — the depth axis is backbone-capacity neutral. Second, context cost: a recurrent state has no token-budget axis, so hierarchy-versus-flat comparisons in the recurrent family cannot hold context cost fixed; the token interface makes every configuration's cost an exact count, enabling matched-budget comparison. Third, metrics: the CW-VAE evaluation aggregates SSIM/PSNR over full frames, and the author's own

measurement (§3.4.3) shows a constant all-black frame outperforming a trained CW-VAE on such aggregates on sparse-foreground video — hence the foreground-masked, re-entry-stratified protocol of §3.4. It is also noted that the CW-VAE paper's depth evidence is an information-allocation (KL-per-level) analysis rather than a prediction-quality dose–response; the quality-per-depth cells are measured directly in §4.4.5. The temporal-abstraction relatives — VTA [34] (whose lower level resets when the upper level ticks) and the clockwork recurrent lineage [33] — complete the review of hierarchy *shapes*: spatial and temporal abstraction, depth and budget allocation are four axes of the design space. Which form of hierarchy pays and where is therefore a measurement question (§4.4), not a postulate.

Summarizing the hierarchical-latent review: this paradigm inherits the generation quality of the diffusion core (§1.3.1) while remedying its two systemic limitations — the flat latent space and the flat context window — and, per the author's measured finding, its *continuous* form is the one trainable at practically reachable scale. It is therefore adopted as the base paradigm of this dissertation.

1.3.3 Energy-based models and resource efficiency

The third class of the review is that of energy-based models (EBM). The EBM paradigm originates in statistical physics [84, 85]. Its basic principle is that the probability of a data configuration x is defined by the Gibbs/Boltzmann distribution:

$$p_\theta(x) = \frac{\exp(-E_\theta(x))}{Z(\theta)} \tag{1.9}$$

where $E_\theta(x)$ is a scalar energy function parameterized by a neural network and $Z(\theta)$ is the partition function. Under a calibrated model, lower energy corresponds to higher model density; it does not automatically imply semantic or temporal consistency.

An important theoretical bridge connects EBM to diffusion models through score matching [86, 87]: the score function approximated by a diffusion model is the negative gradient of an (implicit) energy,

$$\nabla_x \log p(x) = -\nabla_x E(x) \tag{1.10}$$

For the deterministic conditional descent mechanism evaluated later in this dissertation, the sampling pseudo-trajectory is written with its own state y_k:

$$y_{k+1} = y_k - \eta_k \nabla_y E_\theta(y_k; c), k = 0, \dots, K-1, \tag{1.11}$$

where c is the conditioning input and η_k is the prescribed step size. Equation (1.11) describes the tested gradient-descent sampler; it is not a claim that all EBM inference or training uses this deterministic chain.

From the standpoint of systems analysis, the attraction is that the energy supplies an explicit scalar criterion and its input gradient defines an inference direction. This does not guarantee convergence,

calibrated probabilities, or anomaly detection: those properties depend on the learned landscape and sampler. Transformer-parameterized realizations such as Energy-Based Transformers (EBT) [88] expose the number of descent steps as an inference-compute control. This dissertation evaluates that mechanism for conditional video prediction without attributing that task or result to the original EBT publication.

The particular **differentiable-through-descent** formulation studied here has an important computational limitation. If a training loss is differentiated through all K updates of (1.11), the reverse pass must differentiate the input gradient $\nabla_y E_\theta$ and therefore evaluate Hessian–vector and mixed parameter–state derivative terms (often called "double backward"). A vanilla unroll retains a layer-by-step graph whose activation storage grows with K and network depth [89, 90]. This cost characterizes the tested unrolled-descent formulation; it is not an inherent requirement of every EBM objective, sampler, or training algorithm.

Approaches to this barrier constitute the resource-efficiency toolbox of multi-step systems. Gradient checkpointing [30, 31] trades computation for memory by storing only a subset of activations and recomputing the rest; a balanced segment schedule can achieve a square-root memory trade-off in trajectory length. Neural ODE adjoints [91] can avoid retaining the full forward tape but introduce reconstruction and numerical-accuracy concerns. Discrete reversible neural networks—RevNet [32] and RevViT [92]—instead reconstruct layer inputs algebraically. This apparatus forms the core of TempVerseFormer in Chapter 2. It is **not** used to train the final Chapter 3 hierarchical predictor through its rollout; the two resource strands are synthesized methodologically and measured separately.

A scoped forward reference completes this review. In the present research the energy-based mechanism was not adopted a priori but *examined experimentally* under controlled conditions: the matched-capacity regression–diffusion comparison and explicit NFE-sensitivity study of Chapter 4 (§4.2) are reported separately from a two-sided capability study of Energy-Based Transformers, run with the official published implementation and both published training recipes at the largest scale reachable on the available hardware. Its outcome is a **characterized negative** at that scale: one published recipe converges to a stably *mis-ordered* energy landscape (the mean of the data attains lower energy than the true target); the other recipe repairs the ordering — the true target becomes the energy minimum among probed candidates — yet gradient descent from the prescribed initialization still does not reach structured outputs, and inference-time computation does not buy the capability back. This EBM evidence comes from a separate 14.66 M-parameter official-code capability study, not from a third matched-capacity cell. In the shared-interface comparison, the closely matched 7.53 M diffusion and 7.27 M regression cores instead show regime-dependent strengths: diffusion gives better best-of-8 stochastic coverage, whereas regression gives better deterministic best-of-1 rollout. The study is scoped explicitly: it tests a capability the EBT publication does not claim at a scale it did not run, and contradicts

none of the published claims. For this dissertation its systemic significance is that the choice of the per-frame generation core in Chapter 3 is made *by controlled measurement, not by paradigm preference* — and the measurement selects diffusion.

Summarizing the critical analysis of existing approaches: diffusion models are a strong generation mechanism, but a dense flat realization incurs rapidly growing long-context cost; fixed-patch transformers can capture global context, while entropy-guided adaptation offers one way to allocate their tokens non-uniformly; hierarchical latent models make cross-scale and cross-rate allocation explicit; and energy-based models offer an attractive scalar criterion but did not provide usable descent generation at the scale tested in Chapter 4. These observations define an **integrated systems methodology with evidentiary separation**. Chapter 2 studies how representational capacity can follow an uncertainty proxy and how long differentiation tapes can be reconstructed. Chapter 3 independently studies how retained context can be packaged across scales and rates, while Chapters 3–4 turn the Chapter 1 criteria into a measurement instrument. Only the components explicitly specified in Chapter 3 belong to the executed predictor; the other strands share the resource problem and decision framework, not an unmeasured architectural dependency.

1.4 Consistency criteria and methods

In the theory of complex systems one of the fundamental notions is the stability of a system [93] — its capacity to maintain a specified state or target trajectory under external disturbances and internal stochasticity. In the context of generative video models the notion of stability is most closely tied to the term "consistency" (coherence, non-contradiction). Traditionally, the evaluation of generation results in machine learning reduces to the subjective criterion of visual attractiveness or to statistical metrics of proximity to the training sample, such as FID [94]. From the standpoint of systems analysis such an approach is severely limited.

Systems analysis requires the transition from abstract aesthetic evaluation to a formalized criteria apparatus. The generative model is treated as a system transforming the input information signal of the condition u into the output state x. If the state x contains internal logical, spatial, or physical contradictions, it is classified as anomalous. Accordingly, **consistency is operationalized as the absence or bounded severity of specified contradictions in the generated state and trajectory**. It is related to, but not synonymous with, software reliability or dynamical stability.

Since video data have a deep multidimensional structure, consistency cannot be described by one scalar parameter. It is a complex systemic phenomenon requiring an extended taxonomy. This subsection analyzes the classical kinds of consistency — spatial, object, and temporal — integrates the notion of

conceptual consistency, and formalizes hierarchical and trajectory consistency, which are critically important for hierarchical multi-step generative systems.

1.4.1 Spatial and object consistency

The basic level of coherence for any visual signal is **spatial consistency**. This criterion determines the structural integrity of the generated frame at the level of geometry and the mutual arrangement of elements. Its endpoints concern object proportions, boundaries, perspective, and lighting coherence; no single endpoint guarantees all of these properties.

The next level is **object consistency**. In many practical tasks the system must generate a series of states of one and the same object (from different viewpoints, under different lighting), preserving its unique identifying features. Modern generative algorithms approach this task in several ways.

The simplest method of achieving object consistency in diffusion models is generation by the image-to-image approach [95]: an existing reference image is used as the starting point to steer the generation toward a specified result. The diffusion model transfers the information of the image into its latent space, subtly influencing the direction of the process.

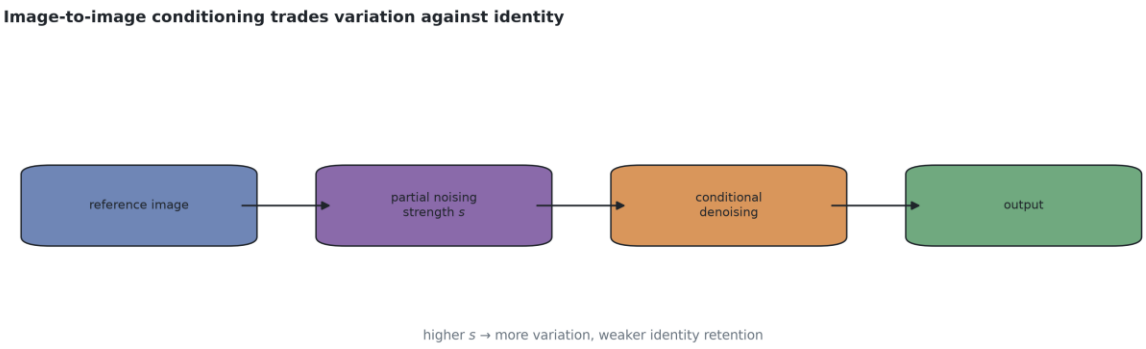


Figure 1.13 — Image-to-image conditioning. Increasing noising strength expands variation but weakens direct preservation of the reference identity. Source: author’s schematic.

This approach, however, has rigid systemic limitations — the difficulty of precise control: a higher degree of noising of the reference increases variability and loses the consistency of fine details (textures, scratches).

A deeper method is fine-tuning of the model itself by approaches of the DreamBooth family [96] and its low-rank variation LoRA [97]. This method uses a set of reference images of a specific object to adjust the internal representation (the weight coefficients θ) of the model. Although DreamBooth can secure the consistency of specific features (for example, facial features or the texture of a particular object), it is computationally heavy and works exclusively within the "learned" object.

For enforcing strict spatial consistency of shape there exists the ControlNet architecture [98], which injects a special control signal (depth maps, contours, segmentation masks) into the reverse diffusion process. Methods of the ControlNet type perform the function of hard boundary control of the admissible state space: the input image acts as a guiding form constraining the evolution of the system.

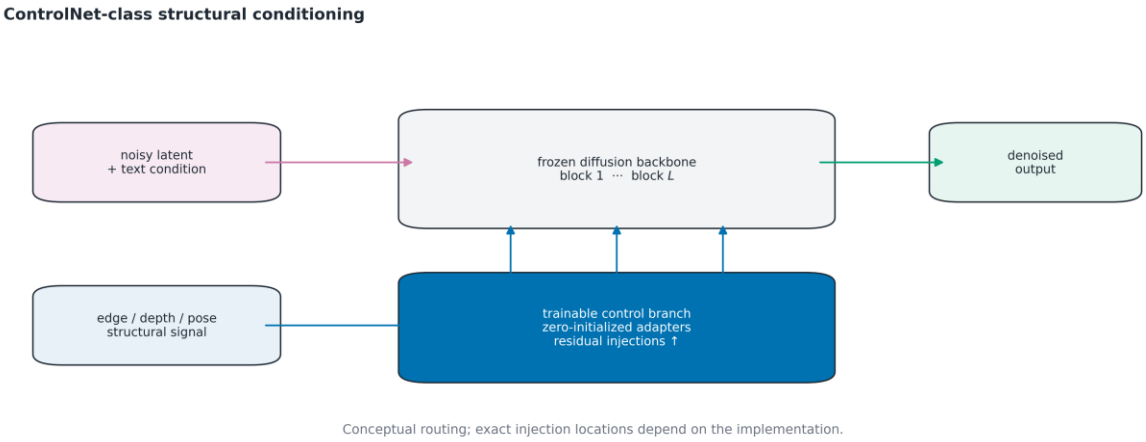


Figure 1.14 — Structural control with a ControlNet-class branch. A trainable branch maps edges, depth or segmentation into residual constraints for a frozen diffusion backbone. Source: author's schematic after the ControlNet architecture [98].

Despite the effectiveness of ControlNet, it is not a complete solution for object consistency, since it focuses on supplied structure rather than persistent internal identity. In autonomous prediction, retaining or retrieving earlier evidence is one possible mechanism when identity is not recoverable from the recent view. Chapter 3 tests coarse long-span context as such a carrier; Chapter 4 also records the boundary where fine full-resolution context preserves identity better.

1.4.2 Temporal consistency

Upon the transition from static images to video data the key criterion becomes **temporal consistency**. It requires that the sequence of generated states $x_1, x_2, \dots, x_T$ form a logical and smooth video stream. Anomalies of temporal consistency manifest as flicker, sudden background color changes, or deformation of objects during motion.

One local diagnostic of temporal consistency uses optical flow or a warping operator W: where the correspondence from frame $t-1$ to frame t is valid, the generated state x_t should agree with the warped previous state. Let $M_t(p) \in \{0,1\}$ select valid, non-occluded pixels p, and let $W_{t-1\to t}$ warp into frame t. A normalized masked pixelwise error is

$$L_{\text{temp}}(t) = \frac{\sum_p M_t(p)\|x_t(p) - W_{t-1\to t}(x_{t-1})(p)\|_2^2}{\sum_p M_t(p) + \varepsilon}, \varepsilon > 0. \tag{1.12}$$

The denominator makes values comparable across different valid-mask areas and ε handles a frame pair with no valid correspondence.

It must be emphasized, however, that the warp criterion (1.12) is **local**: it tests one adjacent-frame correspondence condition and does not certify even short-range temporal quality as a whole. It does not directly evaluate the long-range regime identified in §1.3.1: content that leaves the field of view exits the valid correspondence mask, so correct re-entry many frames later is not observed by the intervening local warp terms. Re-entry then depends on whatever context, recurrent state, learned dynamics, or prior carries the relevant evidence. Long-range temporal consistency is therefore operationalized separately, as part of trajectory consistency (§1.4.5), through metrics stratified by re-entry hardness. The dissertation studies several level-appropriate mechanisms: RoPE-ND and reversible temporal chaining in the separate [A1]/[A2] strands of Chapter 2, and learned window-relative embeddings, block-causal autoregressive recursion, and coarse long-span context in the executed Chapter 3 predictor. Their shared role is to expose or manage temporal structure; they are not all components of one implemented architecture.

1.4.3 Style and conceptual consistency

Besides object consistency, complex systems must maintain a unified **stylistic** appearance of a series of generated data. Modern approaches such as StyleAligned [99] solve this problem through intervention in the attention mechanism (shared attention): target images receive information about the reference image during generation, copying its global stylistic characteristics (color palettes, brushwork) without interfering with spatial geometry.

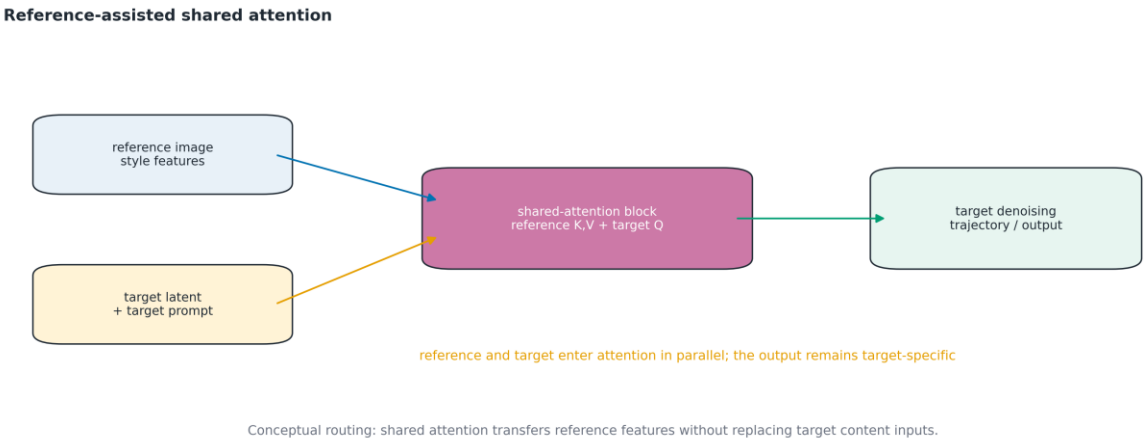


Figure 1.15 — Style consistency through shared attention. Reference attention features are shared across distinct target trajectories while their content conditions remain separate. Source: author's schematic after StyleAligned [99].

Article **[A3]** is the published basis for the dissertation-specific consistency-criteria apparatus. Its contribution is the explicit systems taxonomy and operationalization used here, not priority over earlier notions of semantic, conceptual, compositional, hierarchical, or temporal consistency. Within that scoped apparatus, **conceptual consistency** denotes the criterion defined below.

Marr's multi-stage account of visual representation — progressing from image evidence toward structured descriptions of the scene [100] — motivates a broad engineering analogy, but does not itself prescribe the taxonomy used here. The dissertation's narrower claim is that the traditional division into style and object alone is incomplete. Conceptual consistency is the capacity of the generative system for compositionality and extrapolation. It evaluates the ability of the model not merely to reproduce existing objects but to generate entirely new visual ideas (out-of-distribution), never encountered during training, while strictly observing the logic of the control conditions u.

For example, generating the image "a skyscraper built of skyscrapers" requires the system to perfectly disentangle the vectors of "shape" and "material". An anomaly of conceptual consistency is the loss of compositionality — when the system ignores part of the textual condition or generates objects side by side instead of combining them.

As the metric for evaluating conceptual consistency, the cosine similarity between the semantic vectors of the generated image and the textual condition in the joint space of a contrastive model (CLIP score) [101] is proposed. Let E_I be the visual encoder and E_T the textual encoder; then the measure of conceptual consistency is defined as:

$$C_{\text{concept}}(x, u) = \frac{E_I(x) \cdot E_T(u)}{\|E_I(x)\| \|E_T(u)\|} \tag{1.13}$$

High values of this indicator show alignment in the contrastive embedding space between the generated image and the textual condition. CLIP score is therefore used as a **semantic-alignment proxy**; it neither identifies causal relations nor guarantees compositional understanding, and must be interpreted together with task-specific and human evaluation [102, 103, 104].

1.4.4 Hierarchical consistency

For multi-level generative models, this dissertation operationalizes **hierarchical consistency** as a distinct criterion within the [A3]-based systems taxonomy and the Chapter 3 model. The claim is the dissertation-specific definition, placement, and measurement role of the criterion—not that the general idea of agreement across representational levels originates here.

Hierarchical consistency is defined as the strict informational and structural coherence between the representations of one and the same visual object at different levels of abstraction: the macro level (semantics), the meso level (structure), and the micro level (pixels or textures). An anomaly of

hierarchical consistency is a situation of internal system conflict: for example, the macro signal forms the contour of a brick building while at the micro level the system generates organic wood patterns.

An explicit inter-level communication mechanism can bias a model toward this property, but it cannot guarantee it: representation loss, imperfect attention, and decoding error can still make the levels disagree. In the Chapter 3 model, **information-design asymmetry** assigns long-span history only to coarse tokens, while both target levels are denoised jointly in shared attention (§3.1.2–3.1.3). Thus long-range observed evidence enters through the coarse channel and can condition fine prediction. The fine target can nevertheless conflict with the coarse target, so hierarchical consistency remains an evaluated criterion rather than a structural theorem. Gradient detachment at the frozen representation boundary and between autoregressive windows stabilizes the optimization interface; it does not itself establish semantic or structural agreement between levels.

1.4.5 Trajectory consistency

The last — and, for multi-step generative systems, fundamental — criterion is **trajectory consistency**: the stability of the generation process itself as a trajectory of the complex system. In the original, single-frame reading it concerned the stability of the iterative refinement process in pseudo-time k; in the present research it is generalized and operationalized on the physical time axis, where the dominant practical instability of video generation lives: the degradation of **autoregressive rollout**, in which the system consumes its own outputs as context and errors compound along t (the realization of the target uncertainty of §1.2.4 and the exposure bias of §1.3.1).

The dissertation evaluates trajectory consistency through two requirements. First, **bounded degradation**: prediction error along an autoregressive rollout should grow in a controlled manner, without divergence or collapse of the generated content. Second, **consistent re-entry**: within the evaluated horizon, content that left the field of view should be restored correctly when it returns. Re-entry records whose source views lie outside a short flat package are especially diagnostic of whether a longer-span context mechanism is useful; they do not make all flat architectures information-theoretically incapable.

The operationalization of this criterion, developed in Chapters 3–4, stratifies rollout error by an exactly computable hardness label. For a generated frame x_t with explicit context package C, let the **novel-foreground fraction** $\nu_t(C) \in [0,1]$ be the fraction of target foreground whose underlying world columns are absent from the views represented directly in C. In the purpose-built testbed of Chapter 3 this geometric package-novelty quantity is computed *exactly* from the recorded control-action track rather than estimated. It does not assert that the model could possess no indirect information about those columns. Trajectory consistency is then measured as the family of stratified degradation curves

$$\mathcal{E}_b(h) = \mathbb{E}[e(x_{t+h}, \hat{x}_{t+h}) | \nu_{t+h} \in b] \tag{1.14}$$

— the expected prediction error e at rollout horizon h within each hardness bin b (easy: $\nu = 0$; medium: small ν; hard re-entry: substantial ν) — rather than as a single aggregate number. This stratification is what makes the criterion *diagnostic*: a flat-context system and a long-memory hierarchical system can be indistinguishable on aggregate error while differing qualitatively on the hard re-entry bin beyond the flat window's horizon; conversely, an anomaly of trajectory consistency (divergence, mean-collapse, identity loss at re-entry) localizes to specific bins and horizons.

For energy-based mechanisms the trajectory criterion has a specialized diagnostic in pseudo-time: the progress of the descent chain (1.11) is monitored by the **energy gap** between the initial and final states of the descent,

$$\Delta E = E_\theta(y_0; c) - E_\theta(y_K; c) \tag{1.15}$$

This raw difference is invariant to an additive energy offset but is not compared across independently trained energy gauges. It is reported within a fixed model together with the more direct ordering diagnostic: whether the true target attains lower energy than degenerate candidates. If an objective is differentiated through a long trajectory, its practical feasibility also depends on the activation-storage policy. Chapter 2 compares reversible replay with BPTT and checkpointing for that setting. The Chapter 3 predictor is instead trained on individual windows; its measured long-horizon behavior does not depend on reversible rollout training.

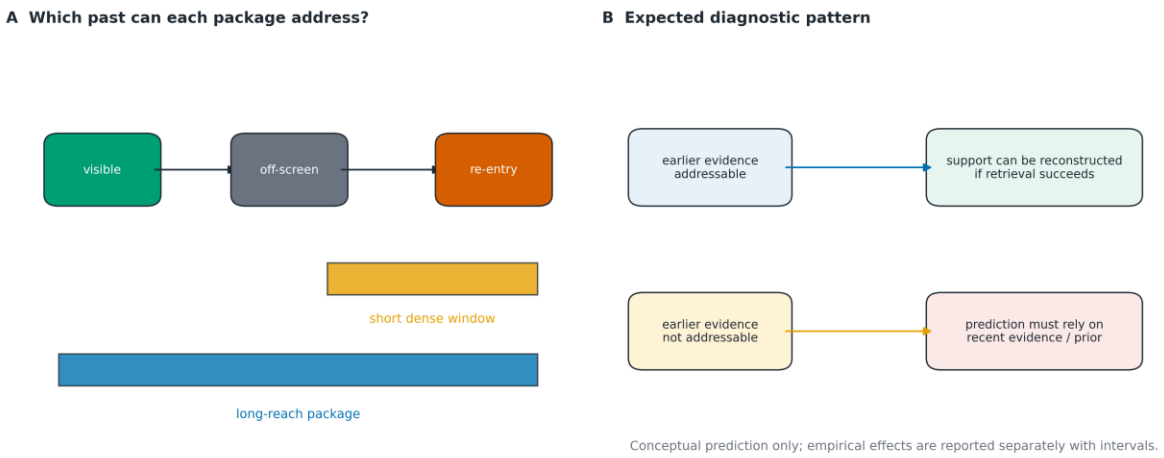


Figure 1.16 — Conceptual operationalization of trajectory consistency. The schematic predicts separation specifically on memory-relevant re-entry records beyond a short window; Chapter 4 tests this prediction with exact generator-derived observability labels and paired rollouts. Source: author's schematic; curves are illustrative, not measured.

The criteria interact but are not interchangeable. A frame can be spatially plausible while identity is wrong, or retain identity while drifting in trajectory. This motivates reporting a suite of criteria rather than reducing consistency to one aggregate score.

ControlNet and LoRA address specific conditioning or adaptation objectives. The systems approach used here complements such mechanisms by making the state interface, context budget, temporal reach, and evaluation population explicit. Chapters 3–4 construct and evaluate a multi-stream context model; Chapter 2 measures reversible activation-memory savings separately. The dissertation does not claim that stop-gradient transfer or reversibility guarantees every form of consistency.

1.5 Conclusions and statement of the research tasks

In the first chapter of the dissertation a thorough systems analysis of the processes of hierarchical video data generation has been carried out. On the basis of complex-systems theory, generative video models have been characterized as open dynamic multi-level control systems operating under substantial structural, informational, computational, and target uncertainty.

The decomposition of the generation system revealed the key problems of contemporary approaches. The analysis of diffusion models showed that dense flat realizations have two limitations relevant to this dissertation: a single-level latent interface provides no explicit allocation between abstraction levels, and a flat spatio-temporal attention context whose computation grows quadratically and whose memory grows linearly with context length. This makes dense extension increasingly costly, while long-video studies report consistency failures when content leaves and later re-enters the field of view. In addition, the divergence between the local training objective and the long autoregressive generation trajectory (exposure bias) undermines long-horizon stability.

The review of patch-based transformer architectures demonstrated their advantages in capturing global contextual dependencies but also identified a possible inefficiency of fixed spatio-temporal tokenization on non-uniform signals. This motivates the entropy-guided adaptive decomposition developed in Chapter 2; it does not imply that fixed patches are always inferior.

The study of hierarchical latent approaches established the remedy direction: an explicitly multi-level latent state space in which a compact upper (coarse) level, carrying few tokens per frame, can retain a long temporal context at a fixed token budget and thereby serve as the carrier of the long-range memory of the process. Discrete-token hierarchies remain an important reviewed alternative with codebook-specific optimization risks. The implemented and evaluated scope of this dissertation is a **compact continuous hierarchical latent state space**; because no controlled VQ-versus-continuous receipts are present, representation-family superiority is not claimed.

The examination of energy-based models (EBM) recorded their systemic attraction—an explicit scalar optimization criterion and input-gradient inference direction—alongside a computational barrier of the differentiable-through-descent formulation tested here: differentiating a loss through a long input-gradient trajectory requires second-order derivative operations and a horizon-dependent vanilla computation graph. In this dissertation the energy-based mechanism is treated as reviewed literature whose capability boundary at reachable scale is characterized experimentally in Chapter 4; the survey of resource-efficiency methods it motivated (checkpointing, Neural ODE, reversible networks) identified reversible transformations as one promising apparatus, which Chapter 2 develops into the time-agnostic backpropagation method and its extension to stochastic multi-level recurrences.

Furthermore, the chapter organized established consistency concerns into the dissertation-specific [A3] systems taxonomy and supplied explicit operational roles for conceptual, hierarchical, and trajectory consistency. The claim is this formalization and operationalization, not priority over the general terms. Trajectory consistency is measured through autoregressive-rollout degradation metrics stratified by an exactly computable re-entry hardness label, converting a broad systems requirement into a diagnostic instrument.

The identified systemic contradiction is between the demand for consistency over longer processes and finite resources for retaining context and differentiating through computation. Explicit hierarchy and reversible replay are two candidate interventions on different resource terms; neither is asserted to be universally necessary. This contradiction determines the relevance of the dissertation and forms its purpose.

The purpose of the dissertation research is to improve the efficiency and the temporal and spatial consistency of hierarchical video data generation processes through the development of systems analysis methods, mathematical models, and intelligent information technologies.

To achieve this purpose and to resolve the identified systemic contradictions, the following research tasks must be solved:

1. Analyze the state and problems of generative video-data models as complex systems; classify the types of uncertainty and identify the systemic causes of anomalies (inconsistencies) in the generation process, including the resource and consistency limitations of flat long-context modeling *(performed in Chapter 1)*.
2. Improve the criteria apparatus of systems analysis of generative processes by extending the taxonomy of consistency types (conceptual, hierarchical, trajectory) and operationalizing trajectory consistency through measurable rollout metrics stratified by re-entry hardness *(the taxonomy is constructed in Chapter 1; the operational metrics and their measurement instrument are developed in Chapters 3–4)*.

3. Develop a method for estimating the state of uncertainty of spatio-temporal data through their adaptive decomposition using entropy metrics and the mathematical apparatus of multidimensional rotary positional embedding.
4. Develop a method for optimizing the activation-tape resources of multi-step iterative models through reversible mathematical transformations; characterize its horizon scaling, extend it to stochastic multi-level recurrences with explicit replay-information accounting, and delimit its domain of applicability relative to checkpointing.
5. Develop a mathematical model of multi-stream video data generation in compact hierarchical latent state spaces, supporting context streams at different temporal rates and spatial resolutions over a shared attention backbone, with explicit long-range context allocation and a per-frame iterative-refinement generation core selected by controlled mechanism analysis.
6. Create an intelligent information technology and a software complex for systems analysis of hierarchical video generation processes: a common methodology connecting adaptive representation, activation-resource optimization, context packaging, and a purpose-built memory-horizon measurement instrument, while retaining the experimentally verified boundary between separately measured components and the executed predictor.
7. Conduct comprehensive experimental studies and approbation of the developed methods and technology on synthetic and open datasets — including a matched-capacity regression–diffusion comparison with explicit inference-work accounting — and compare their efficiency and consistency with modern analogues.

The chapter therefore hands forward two resource questions. Chapter 2 asks **what information deserves representational capacity** and **what part of a long differentiation tape must be stored rather than reconstructed**. Chapter 3 asks **which past state must remain addressable at inference time and how it should be packaged under a fixed context budget**. Chapter 4 then keeps the evidence for these questions separate while comparing their operating regions. This is the systems connection among the publication strands; it is not a claim that every method is executed inside one model.

The results of this chapter are published in the author's work [A3] and in the conference publications to be identified in the final author-supplied publication list.

Chapter 2 — Mathematical Methods for Uncertainty Estimation and Resource-Efficient Modelling of Multi-Step Video Processes

2.1 Entropy-Based Estimation of Spatio-Temporal Video Uncertainty

As established in the previous chapter during the decomposition of the complex system, the processes of hierarchical video data generation operate under a high level of multidimensional uncertainty. To build an effective control system for such processes, it is necessary to develop a mathematical apparatus for resolving the informational, structural-algorithmic, and computational uncertainty at every stage of information processing. One of the fundamental problems that generates a significant share of the structural-algorithmic and computational uncertainty is the problem of inefficient decomposition of the input spatio-temporal data.

The chapter is organized by two resource questions inherited from Chapter 1. **Representation allocation:** where should a finite token budget preserve more detail, and how should spatial and temporal coordinates remain visible after linearization? **Activation-tape allocation:** which intermediate values of a long computation must be stored, and which can be reconstructed during the reverse pass? Sections 2.1–2.2 answer the first question through the published [A1] methods; §§2.3–2.4 answer the second through the published [A2] method and the dissertation-level stochastic extension. These strands share a resource-decision framework but remain separately implemented and evaluated.

> **Published basis and dissertation-level extension.** Sections 2.1–2.2 reconstruct the [A1] contribution (V-BLT and RoPE-ND); §§2.3–2.4 reconstruct the deterministic TempVerseFormer and time-agnostic backpropagation contribution of [A2]. The store-the-noise recurrence, explicit replay-memory accounting, perturbation study, and three-axis applicability boundary are the dissertation-level extension built around those published results. None of these additions is attributed to [A4], and the Chapter 3 predictor does not execute them.

In classical systems analysis, the decomposition of a complex system must reflect its internal information saturation and structure. However, the traditional approaches to the mathematical modeling of video data, popularized by architectures of the Vision Transformer (ViT) type [69] and their spatio-temporal extensions ViViT [70] and Video Swin Transformer [71], are based on a rigid, a-priori-fixed partition of the image or video stream into a regular grid of non-overlapping patches of fixed size, e.g., 16×16 pixels.

Fixed patches are simple and effective, but their token allocation is independent of local signal complexity. In videos with large low-variation regions and small high-detail moving regions, this can allocate equal token cost to areas with different representational demands. Whether that trade-off matters is empirical rather than a universal defect of fixed-grid models.

The dissertation investigates adaptive, data-dependent decomposition as one response. The conceptual foundation for this transition is the new paradigm of byte-level language models that emerged in natural language processing, in particular the Byte Latent Transformer (BLT) [72]. These systems abandoned the paradigm of fixed token vocabularies in favor of dynamic grouping of elementary information units (bytes) into latent patches whose size is inversely proportional to the local complexity of the signal.

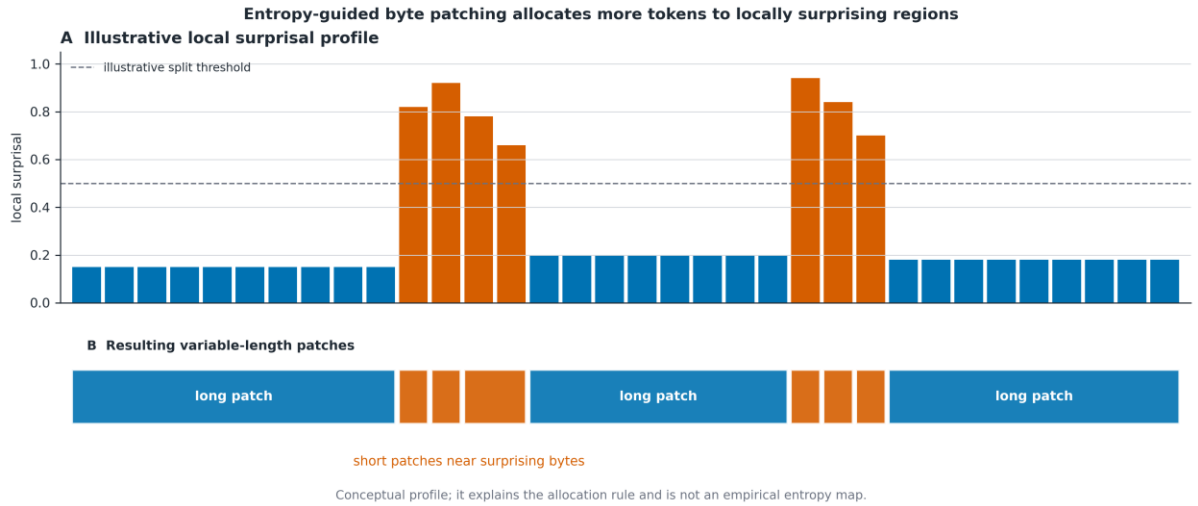


Figure 2.1 — Conceptual operating principle of entropy-driven byte patching. Long low-entropy regions are grouped into larger latent patches, whereas locally surprising regions receive finer allocation. The values are schematic, not empirical measurements. Source: author's schematic after BLT [72].

Within the dissertation research, the results of which are published in **[A1]**, the hypothesis was put forward that transferring the principles of adaptive entropy-based tokenization to the visual modality may improve the allocation of computational resources of a generative system. On the basis of this approach, the author developed the method for estimating spatio-temporal uncertainty and a new mathematical architecture — the Vision Byte Latent Transformer (V-BLT).

Working at the input-byte level, where each RGB channel value is represented by an integer from 0 to 255, avoids committing the target interface to a learned discrete visual codebook [73]. It does not make the learned hidden representation lossless. The developed V-BLT architecture is a three-tier hierarchical information-transformation system consisting of a Local Encoder, a Global Latent Transformer, and a

Local Decoder. In the arc of this dissertation, V-BLT is the author's **first realization of the hierarchical adaptation of video generation** — a two-stage decomposition in which local byte-level stages surround a global latent stage and an entropy criterion governs the allocation of capacity between them. Chapter 3 applies the **shared systems principle** of non-uniform allocation to a different object—the retained context package—but its continuous two-level autoencoder and predictor are not a mature or executable continuation of V-BLT.

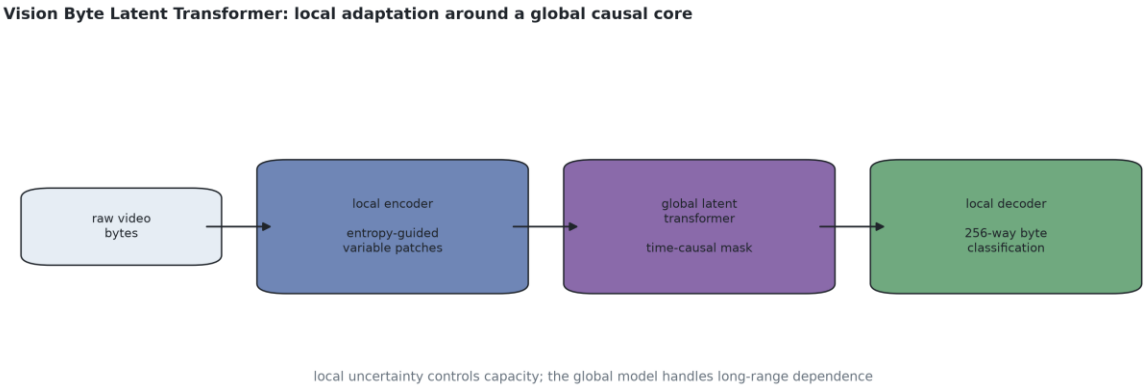


Figure 2.2 — Vision Byte Latent Transformer architecture. Local entropy-guided aggregation and byte classification surround the global time-causal latent transformer. Source: author's schematic of the [A1] method.

The first subsystem — the **Local Encoder** — performs the function of primary adaptive aggregation. The input is a video sequence as a multidimensional tensor of raw bytes. The task of the Local Encoder is the dynamic grouping of locally correlated bytes into compact latent representations in the form of spatio-temporal patches $Z = \{z_1, z_2, \dots, z_M\}$. Mathematically it is realized as a lightweight convolutional-transformer network that predicts data-dependent boundaries of information aggregation.

The second subsystem — the **Global Latent Transformer** — is the computational core and is responsible for modeling the long-term dynamics in the compressed space. Since this block performs autoregressive prediction for time-series modeling, its architecture requires a specific design of the attention-masking system to prevent information leakage from future frames [12], while allowing tokens within the current and preceding frames to interact.

For this purpose, a spatio-temporal attention-masking matrix is used. Let the latent space have dimensionality $T' \times S'$, where T' is the number of time steps and S' is the number of spatial patches per frame. The attention matrix M is computed so that for any token z_i from frame t_i, the attention weights toward a token z_j from frame t_j obey the rule:

$$M_{i,j} = \begin{cases} 0, & \text{if } t_j \le t_i \\ -\infty, & \text{if } t_j > t_i \end{cases} \tag{2.1}$$

This time-causal, spatially connected mask prevents future-frame attention. It does not by itself guarantee physical plausibility or accurate dynamics.

The third subsystem — the **Local Decoder** — projects the predicted latent macro-states back into the micro-space of image bytes. The key mathematical innovation of the developed method, which distinguishes it from standard pixel-regression approaches of the MSE type, is the use of a classification model for byte generation. At the output, the decoder forms a tensor that yields, for each pixel, not a scalar brightness value but a full probability distribution over the 256 possible byte states.

Formally, for each byte (sub-pixel) x_i the system computes a logit vector $L_i \in \mathbb{R}^{256}$. The probability estimate that the byte takes a specific discrete value $k \in \{0, \dots, 255\}$ is determined by the softmax activation function:

$$p(x_i = k) = \frac{\exp L_{i,k}}{\sum_{j=0}^{255} \exp L_{i,j}} \tag{2.2}$$

Such a mathematical formulation transforms the problem of minimizing the mean squared error (MSE), which by its nature is prone to smoothing and to the loss of high-frequency details, into a classification problem using the cross-entropy loss function [105]. This makes it possible to correctly model multimodal distributions: for example, the contour of a moving object may shift one pixel to the left or to the right with equal probability, which cannot be described by a single mean value.

The main advantage of the classification approach for systems analysis lies in the possibility of direct mathematical computation of a measure of spatio-temporal uncertainty. Having a discrete probability distribution for each pixel, the classical apparatus of Shannon information theory is applied. The information-entropy measure H_i for each predicted pixel i is computed as:

$$H_i = -\sum_{k=0}^{255} p(x_i = k) \log_2 p(x_i = k) \tag{2.3}$$

The entropy value lies between 0 bits (a point-mass categorical prediction) and 8 bits (a uniform distribution over 256 byte values). These are properties of the model's predictive distribution, not proofs of real-world determinism or calibrated confidence. Computing the value for all pixels forms a two-dimensional per-pixel entropy map.

Entropy maps provide a local diagnostic of how dispersed the learned byte distribution is. Empirical studies reported in **[A1]** show, for the evaluated sequences, higher entropy near moving contours and newly exposed or occluded regions than in static background. This spatial association supports their use as an allocation proxy in that setting; without calibration and uncertainty decomposition it does not identify aleatoric uncertainty, epistemic uncertainty, or prediction error separately [44, 45]. Figures 2.3

and 2.4 show prediction examples for a simple 2D and a complex 3D sequence respectively, where the first row contains the expected frames of the sequence, the second the frames predicted by the V-BLT model, and the third the entropy maps corresponding to the predicted frames (black indicates high entropy, white low entropy). A key aspect of the V-BLT architecture is its ability to operate on categorical raw-byte targets, which makes per-pixel predictive entropy directly computable. Higher entropy means a more dispersed categorical output; "confidence" is used only in this model-internal sense.

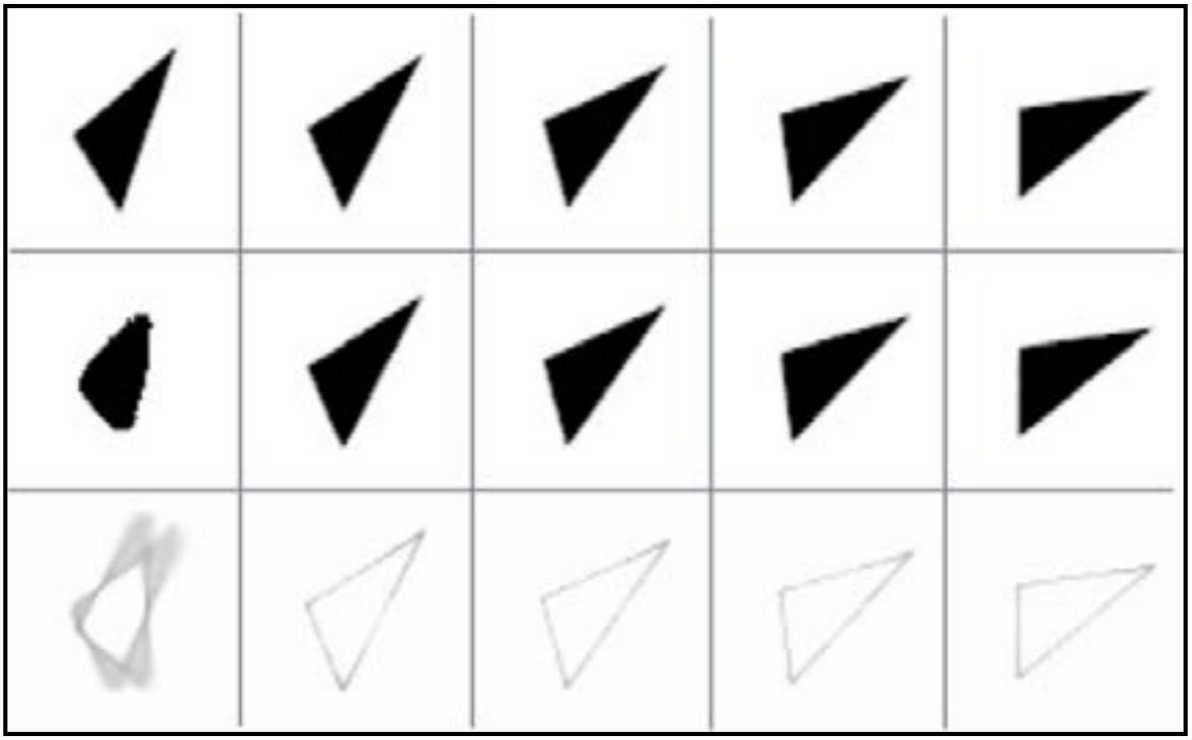


Figure 2.3 — V-BLT prediction and entropy maps for a rotating 2D shape. Rows show, respectively, ground truth, V-BLT predictions and per-pixel entropy maps over five future frames. The first prediction has the largest shape error and the broadest high-entropy region; subsequent predictions recover the rotating contour while entropy concentrates near its boundary. Source: Kulyk and Mokin, *Scaling Video Prediction with Spatio-Temporal Patches*, published Fig. 7, DOI 10.31649/1997-9266-2025-182-5-129-139.

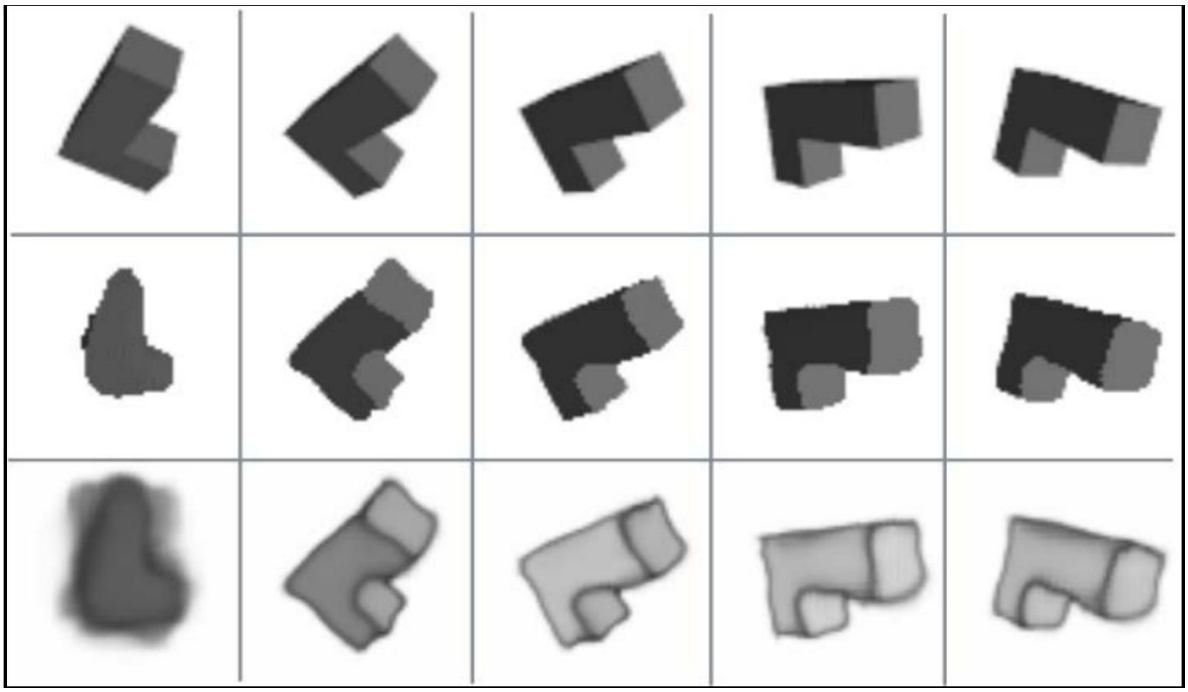


Figure 2.4 — V-BLT prediction and entropy maps for a rotating 3D polycube. Rows show ground truth, V-BLT predictions and per-pixel entropy maps. The first low-context forecast is visibly degraded; later frames preserve the coarse polycube structure, while uncertainty remains strongest along moving and newly exposed boundaries. Source: Kulyk and Mokin, *Scaling Video Prediction with Spatio-Temporal Patches*, published Fig. 8, DOI 10.31649/1997-9266-2025-182-5-129-139.

From the standpoint of complex-system control, the entropy map is a **candidate feedback signal** for dynamically forming latent patches of variable size. Low-entropy regions can be aggregated into larger spatial blocks and high-entropy regions assigned finer patches, reducing the global sequence length when the observed entropy pattern is informative. The resulting computational saving depends on the realized patch-count reduction, and useful allocation depends on the predictive distribution being sufficiently calibrated for the decision [44, 45].

It is important to note the place of this instrument within the overall system developed in this dissertation. The per-pixel entropy is a *local* measure of informational complexity: it answers the question "where exactly is prediction hardest for the system". It thereby complements the *global* consistency criteria of the generation process — the hierarchical- and trajectory-consistency criteria introduced in Chapter 1, which for the hierarchical generation model developed in Chapter 3 are operationalized in Chapter 4 through autoregressive-rollout degradation metrics stratified by re-entry hardness. The local entropy signal governs the allocation of computational resources within a frame, while the global criteria evaluate the consistency of the generated process as a whole.

The [A1] results establish the feasibility of entropy-guided allocation in the reported setting; they do not establish globally optimal patch boundaries or a fully resource-efficient generator. The next question is how a linear token sequence retains explicit spatial and temporal coordinates. Section 2.2 develops RoPE-ND for that coordinate-interface problem.

2.2 Structural Coherence through Multidimensional Positional Encoding

Flattening a multidimensional spatio-temporal array into a sequence removes **explicit coordinate structure from token order** unless positional information is supplied. The pixel/patch values are not themselves erased, but permutation-equivariant self-attention otherwise has no basis for distinguishing the physical axes. A positional interface is therefore needed before structural relations can be learned.

The multidimensional tensor of visual data, mathematically described as $X \in \mathbb{R}^{T \times H \times W \times C}$, where T is the temporal dimension, H and W are the spatial coordinates, and C the information channels, necessarily undergoes a linearization operation. As a result, a one-dimensional sequence of latent vectors $Z = \{z_1, z_2, \dots, z_L\}$ is formed, with total sequence length $L = T \cdot H \cdot W$. This linearization is a conventional interface for global self-attention. By itself, it does not encode the mutual spatio-temporal arrangement of the elements; the arrangement must be supplied through positional features, architectural locality, or an equivalent signal.

In the theory of complex systems, such a loss of information is classified as a critical growth of structural uncertainty. The transformer architecture is, by its mathematical nature, invariant to permutations of the elements of a set. This means that without additional control signals the system cannot distinguish whether two latent patches were physically adjacent horizontally within one frame, or belonged to entirely different frames of the video sequence in time. The absence of a precise coordinate anchoring makes it impossible to model adequate kinematics and geometry of the visual scene.

One common approach is absolute positional encoding [12], which adds a coordinate vector p_i to each latent token z_i. Absolute positions break strict translation equivariance of an otherwise equivariant token operation, although a learned model can still represent relative relationships and may benefit from absolute location when the task is not translation invariant.

An alternative is relative positional encoding or bias [106, 71], where the attention score depends on relative displacement. A naively materialized pairwise bias tensor has $O(L^2)$ entries, but parameterized, bucketed, local, and kernel-fused implementations need not store a separate dense learned matrix. The relevant design question is therefore which positional interface expresses the required axes with acceptable materialized memory and computation.

To overcome these systemic contradictions, within the development of the information technology it is proposed to apply the mathematical apparatus of Rotary Positional Embedding (RoPE) [107] with its subsequent generalization to N-dimensional space. The RoPE applies position-dependent rotations without storing a learned pairwise relative-bias matrix. The core idea is to group feature pairs as complex coordinates and rotate them according to position.

Let the attention subsystem operate on query vectors q and key vectors k of dimensionality D. For a one-dimensional sequence, the position of element m is encoded by multiplying the vector by an orthogonal rotation matrix $R_{\Theta,m}$. Applying this operation to query and key vectors makes the positional phase in their scalar product depend on relative displacement. In the complex representation:

$$\langle R_{\Theta,m}q, R_{\Theta,n}k\rangle = Re\left[\left(qe^{im\theta}\right)\left(ke^{in\theta}\right)^{*}\right] = Re\left[qk^{*}e^{i(m-n)\theta}\right] \quad (2.4)$$

As the equation shows, the positional phase contains the difference $m-n$. The complete attention score still depends on the learned content vectors q and k; RoPE does not force a particular attention pattern.

The original RoPE formulation [107] uses a one-dimensional sequence coordinate. A flattened video index can be supplied, but it does not explicitly separate time, row, and column displacement. In the research underlying **[A1]**, N-dimensional rotary positional embedding (RoPE-ND) [107] assigns independent feature subspaces to these axes.

The essence of the generalization is the decomposition of the latent token's feature space into N independent subspaces, each responsible for its own physical coordinate. For video data the dimensionality of the coordinate system is $N = 3$: the time axis t, the vertical axis y, and the horizontal axis x. Accordingly, the state vectors q and k of total dimensionality D are split into three equal non-overlapping segments of dimensionality $d = D/3$.

For the equal disjoint-subspace construction used here, each subspace has even dimensionality. Thus this **implementation** chooses D divisible by $2N$ (by 6 for three video axes). Other allocations can reserve unequal subspaces or leave channels unrotated, so divisibility by six is not a universal requirement of video transformers.

For each of the three coordinates, an independent set of basis rotation frequencies θ_j is formed. The frequencies are typically defined by a geometric progression:

$$\theta_j = 10000^{-2j/d}, j \in \{0, \dots, d/2-1\} \quad (2.5)$$

Let a visual token of the system be located at the spatio-temporal point with physical coordinates (t_c, y_c, x_c). The rotation angles for each segment are computed as the product of the coordinate and

the corresponding frequencies: $t_c\theta_j$, $y_c\theta_j$, $x_c\theta_j$. The resulting unitary transformation of the whole state vector q is formed as the concatenation of three independently rotated sub-vectors:

$$q'_{\text{rotated}} = \left[R^d_{\Theta,t_c} q_t \backslash R^d_{\Theta,y_c} q_y \backslash R^d_{\Theta,x_c} q_x\right] \tag{2.6}$$

where $R^d_{\Theta,\text{pos}}$ denotes the $d \times d$ rotation matrix for the corresponding axis. The same operation is applied to the key vector k.

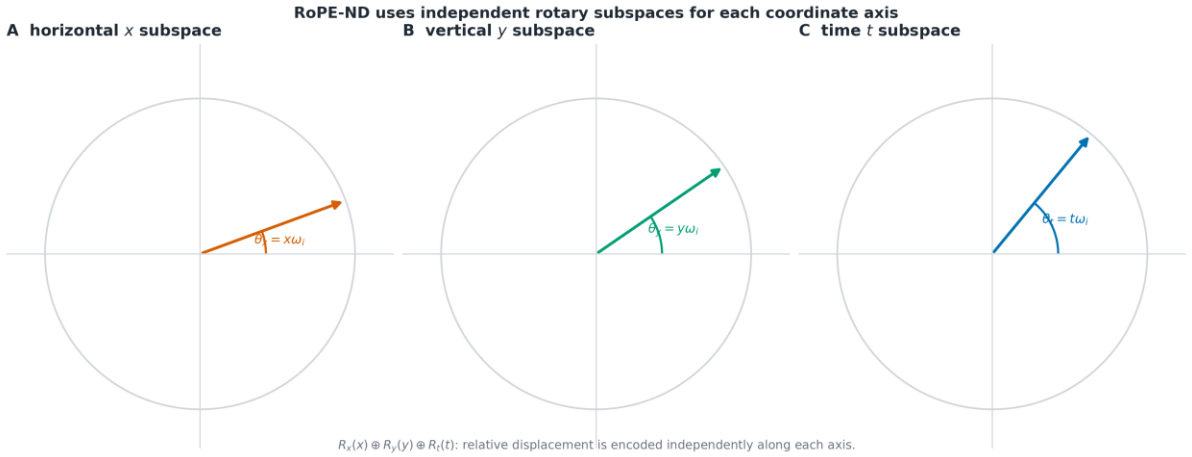


Figure 2.5 — N-dimensional rotary positional embedding. Independent rotations encode horizontal, vertical and temporal coordinates so attention depends on relative displacement along all three axes. Source: author's schematic of the [A1] method.

With disjoint coordinate subspaces, the rotary attention logit decomposes by axis while retaining the learned query and key content. For token positions $\mathbf{p}_q = (t_q, y_q, x_q)$ and $\mathbf{p}_k = (t_k, y_k, x_k)$,

$$s(q,k;\mathbf{p}_q,\mathbf{p}_k) = \frac{1}{\sqrt{D}} \sum_{a\in\{t,y,x\}} q_a^\top R^d_{\Theta,p_{k,a}-p_{q,a}} k_a. \tag{2.7}$$

Thus each term depends jointly on the learned content vectors q_a, k_a and the corresponding relative coordinate displacement. With $\Delta t = t_q - t_k$, $\Delta y = y_q - y_k$, and $\Delta x = x_q - x_k$, the algebra establishes relative-coordinate dependence in the rotary score terms. It does not prove that a learned model recovers physical topology or attends to the correct object.

Systemic significance and scope. In an architecture with explicit cross-resolution attention, coordinates can be affinely mapped to a common physical scale before RoPE-ND is applied. This provides a consistent coordinate convention for fine and coarse tokens, but it does not force attention to select geometrically correct regions or guarantee semantic routing. The measured Chapter 3 predictor does **not** use this mechanism: it uses learned level, role, and frame embeddings with joint attention. RoPE-ND is therefore a separate representation result from [A1], not an explanation of the Chapter 4 context-package effects.

Applying RoPE-ND costs $O(D)$ arithmetic per token and avoids storing a learned pairwise bias matrix. It is compatible with memory-efficient architectures, but no end-to-end experiment in this dissertation combines RoPE-ND, reversible rollout training, and the final hierarchical predictor.

2.3 Resource Optimization for Multi-Step Temporal Modelling

The V-BLT and RoPE-ND methods address representation and coordinate structure. A separate constraint arises when an iterative model must be differentiated through a long computation: activation storage can exceed available device memory. Systems analysis must therefore consider both model adequacy and implementation feasibility.

For the long unrolls measured in this work, accelerator memory is a binding constraint alongside throughput [108, 109]. Which resource dominates is hardware- and model-dependent.

Backpropagation Through Time (BPTT) [28] differentiates a temporally unrolled dynamic system. A vanilla implementation retains the intermediate activations required by the reverse pass; checkpointing and reversible replay are alternative storage/recomputation schedules.

Mathematically, the amount of operating memory M required to store the full computation graph is linearly dependent on the depth of the temporal unrolling and the number of layers in the system:

$$M = O(N \cdot T \cdot L \cdot D) \tag{2.8}$$

where N is the dimensionality of the spatial state (the number of tokens per frame), T the number of time steps or optimization iterations, L the number of model layers, and D the dimensionality of the latent feature space. For video states, the product can exceed available memory as the differentiated horizon grows.

The presence of such computational uncertainty forces various heuristic compromises. The most common approaches are truncated backpropagation (Truncated BPTT) [29] and gradient checkpointing [30, 31]. Truncated backpropagation limits the gradient horizon—e.g., differentiating only the last five frames—and therefore removes learning signals that cross that boundary. Checkpointing reduces memory consumption (to a square-root trade-off under a balanced segment schedule; see Table 2.1) at the cost of recomputation.

The task considered here is to organize reverse differentiation so that the transient local activation graph is constant with respect to the number of reversible time steps T, while preserving the full-horizon gradient semantics for the tested recurrence.

To solve this systemic problem, the dissertation research developed the Temporal Reversible Transformer (TempVerseFormer) architecture. The developed architecture and the mathematical

method of computational-resource optimization were published by the author as the sole author in an international scientific journal indexed by the Scopus scientometric database (**[A2]**).

The method replaces a stored long activation tape with discrete reversible transitions. If the transition from layer l to layer $l+1$ has a closed-form algebraic inverse, the preceding state can be reconstructed from the current state during reverse replay. In finite precision the reconstruction is approximate and its error must be measured; parameters, optimizer state, and any exogenous replay information remain resident.

Continuous-time adjoint methods such as Neural ODEs [91] and discrete reversible models such as RevNet and RevViT [32] provide related storage/recomputation strategies with different numerical trade-offs. The scientific novelty of TempVerseFormer lies in combining structural reversibility at the level of individual transformer layers with an iterative temporal-chaining mechanism for modeling multi-step processes.

The structural decomposition of the reversible block in the TempVerseFormer architecture is based on splitting the input information flow into two independent branches. Let the system operate on a latent state of total dimensionality D. At the input of the reversible block, this state is forcibly split into two mutually exclusive sub-vectors x_1 and x_2. The functioning of the reversible block is described by a system of two sequential nonlinear transformations using the attention mechanism and a multilayer perceptron (MLP).

The mathematical formalization of the forward pass through reversible block l is described by the following system of algebraic equations.

Update equation of the first branch:

$$y_1^{(l)} = x_1^{(l)} + Attention\left(x_2^{(l)}\right) \tag{2.9}$$

Update equation of the second branch:

$$y_2^{(l)} = x_2^{(l)} + MLP\left(y_1^{(l)}\right) \tag{2.10}$$

This algebraic structure ensures that only x_2—unchanged during the first stage—is used to compute the additive update of x_1. Accordingly, in exact arithmetic the inputs are recovered by evaluating the couplings in reverse order and replacing addition with subtraction; numerical reconstruction error is reported separately.

Reverse reconstruction of the second branch:

$$x_2^{(l)} = y_2^{(l)} - MLP\left(y_1^{(l)}\right) \tag{2.11}$$

Reverse reconstruction of the first branch:

$$x_1^{(l)} = y_1^{(l)} - Attention\left(x_2^{(l)}\right) \tag{2.12}$$

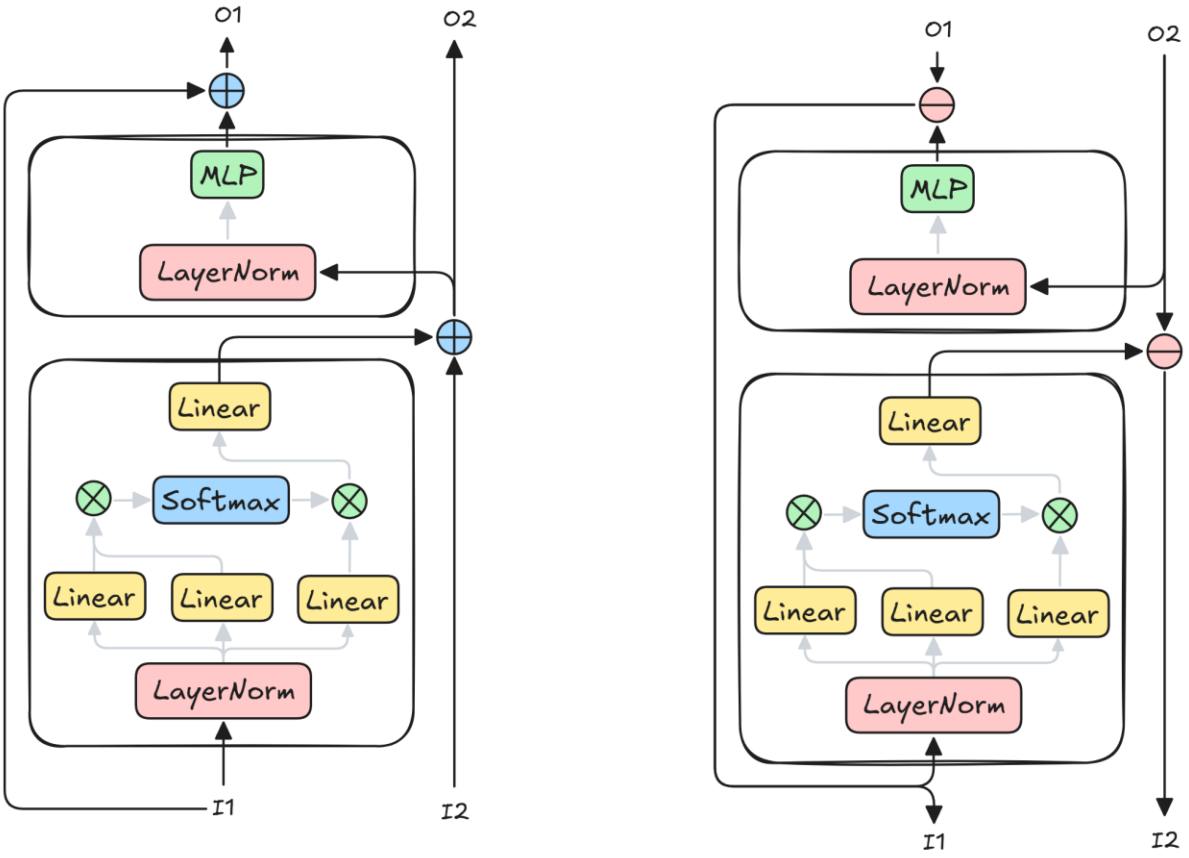


Figure 2.6 — Forward and reverse information flow in a reversible transformer block. The additive coupling structure permits algebraic reconstruction of block inputs from its outputs; finite-precision error is measured separately. Source: author's published TempVerseFormer project asset [A2].

For the reversible blocks to solve the task of controlling generation in time, they are integrated into a higher structural level of the system through the **temporal chaining** mechanism. Instead of concatenating all video frames into a single enormous tensor — which leads to the quadratic memory collapse $O((N \cdot T)^2)$ in the attention mechanisms — the system moves to an iterative autoregressive paradigm of state generation.

The temporal chaining mechanism works as follows. The system receives an initial context set V_{ctx}. At step t, the system applies the transition functional — a stack of L reversible blocks — and generates the time-shifted sequence V_{out}. This output tensor is fed back directly and becomes the input V_{in} for the next generation step $t + 1$. Mathematically this is described by the recurrence relation:

$$V_t = \Phi(V_{t-1}, \theta) \tag{2.13}$$

where Φ is the transition functor built exclusively from algebraically reversible transformer blocks.

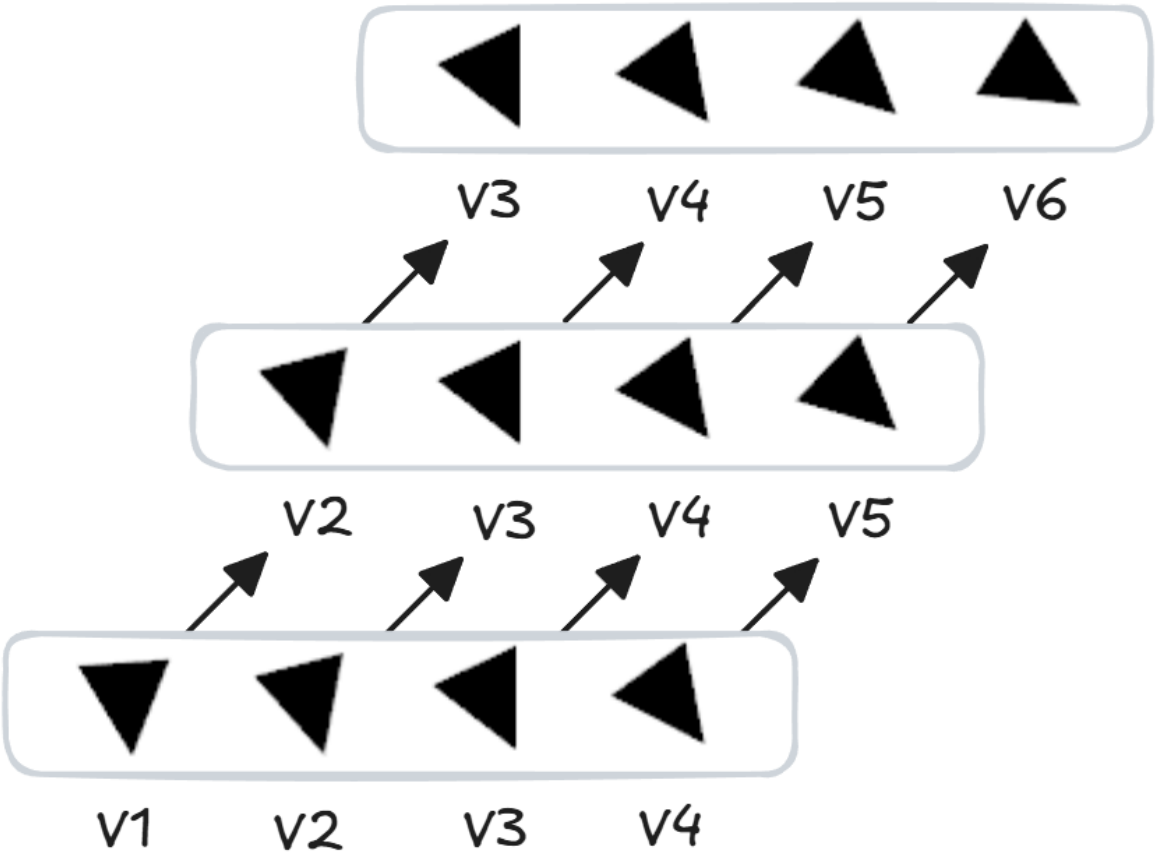


Figure 2.7 — Temporal chaining for autoregressive time-series modeling. The same reversible transition is applied along physical time while the realized state is passed to the next step. Source: author's published TempVerseFormer project asset [A2].

For a deterministic recurrence composed of these reversible elements, and given unchanged model parameters and all conditioning inputs, the trajectory $V_1 \to V_2 \to \cdots \to V_T$ is algebraically invertible. Reverse replay reconstructs its intermediate states from V_T one step at a time instead of retaining their activation graphs; finite-precision error and any stochastic replay signal remain separate accounting terms.

To focus the computational resource of the reversible transformer exclusively on the analysis of complex temporal dynamics, the global architecture of the TempVerseFormer information technology uses an auxiliary spatial-compression subsystem — a variational autoencoder (VAE). Its function is to resolve the spatial redundancy of pixels: each video frame is projected into a compact latent vector before processing by the reversible blocks. After generation is completed, the latent states are unfolded back

by the VAE decoder. This architectural modularity separates the task of spatial compression from the task of temporal control.

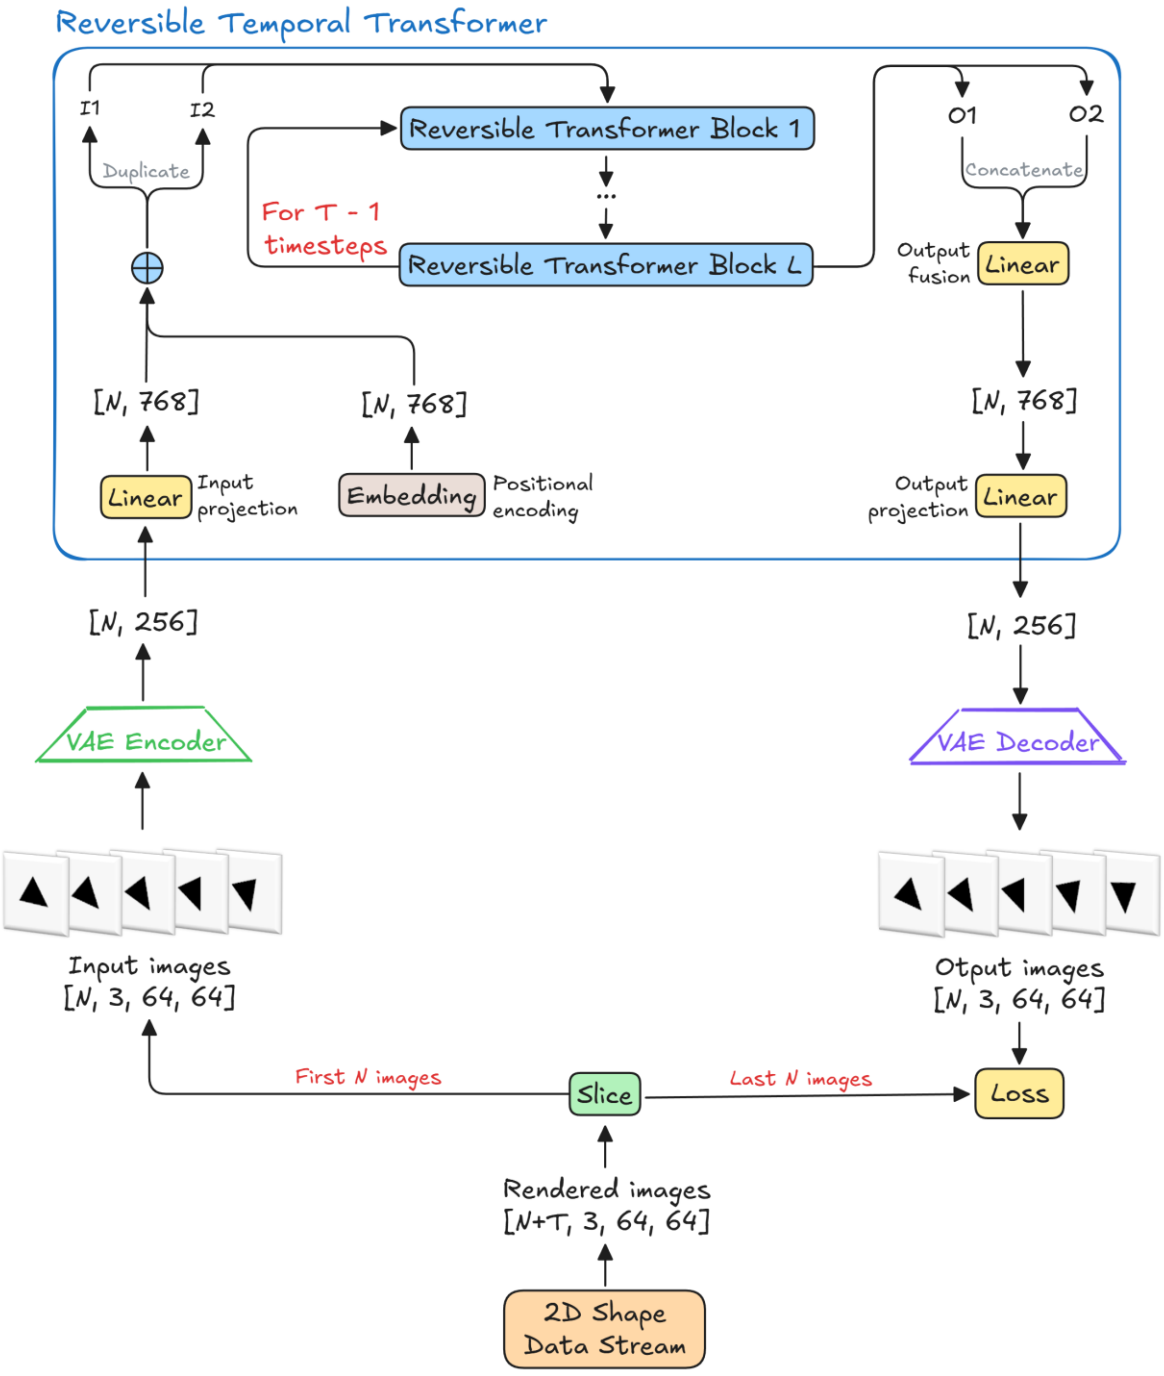


Figure 2.8 — Global TempVerseFormer architecture. A spatial VAE interfaces the video frames with the reversible temporal core. Source: author's published TempVerseFormer project asset [A2].

Temporal chaining of reversible blocks provides algebraic state recoverability in exact arithmetic. It does not guarantee numerical stability, preservation of task-relevant information, or useful gradients. The

next subsection shows how reverse replay is used for gradient computation and later measurements delimit its stability and memory behaviour.

2.4 Time-Agnostic Backpropagation through Reversible Transformations

Long temporal optimization requires an explicit policy for storing or reconstructing the reverse pass. BPTT [28] supplies the gradient semantics; the resource question is how its required intermediate values are made available.

The BPTT gradient follows the chain rule through the unrolled composite function. The reverse pass needs the corresponding states and local activations, but they need not all be cached: vanilla autograd retains them, checkpointing recomputes segments, and the developed method reconstructs reversible states before rebuilding each local graph.

For large spatio-temporal states, vanilla retention makes activation memory grow with the unroll and can cause out-of-memory failure. This is the measured bottleneck addressed here; it is not a claim that every long-horizon model must use reversibility.

Within this dissertation research, the method of **time-agnostic backpropagation** was developed for the tested reversible recurrence. The method is based on integrating the mathematical apparatus of discrete reversible transformations directly into the gradient-computation process along the temporal chain.

The main idea is to reconstruct states during the backward pass instead of caching the full activation trajectory during the forward pass. The inverse transition functions R^{-1} are algebraically exact for the stated recurrence; an implementation reconstructs them within floating-point tolerance and pays recomputation cost without requiring a learned inverse.

The training strategy of the complex generative system under this algorithm splits into two phases.

Phase one — the forward pass. The system sequentially computes the evolution of the state. For every time step t from 1 to T and every layer l from 1 to L, the forward reversible transformation R is applied to the current inputs (x_1, x_2). After the outputs (y_1, y_2) are computed, the system immediately deletes all internal activations from memory, keeping only the result. Upon reaching the final step T, the system stores only one final macro-state in memory.

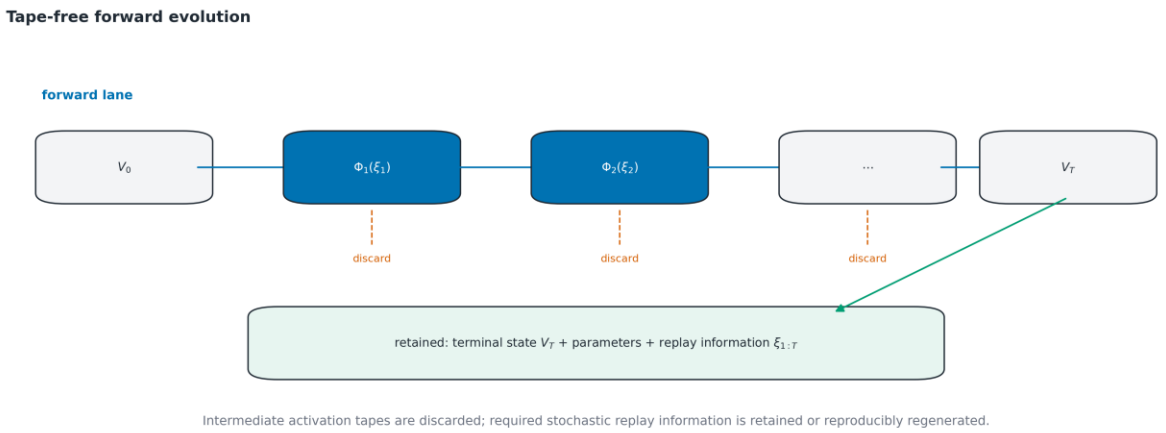


Figure 2.9 — Activation-free forward evolution. Intermediate temporal states are discarded; the terminal state, parameters and stochastic replay information are retained. Source: author's algorithmic schematic.

Phase two — the reverse pass. This phase is the conceptual core of the method. The reverse pass starts with the computation of the gradient of the loss function with respect to the final state of the system, $\nabla_{y_T} L_{\text{loss}}$. Then, for every time step t from T down to 1, the algorithm moves in the reverse direction: it reconstructs the layer inputs by the inverse transformations (2.11)–(2.12), locally rebuilds the computation graph of a single transition, computes the local gradients, and immediately destroys the local graph.

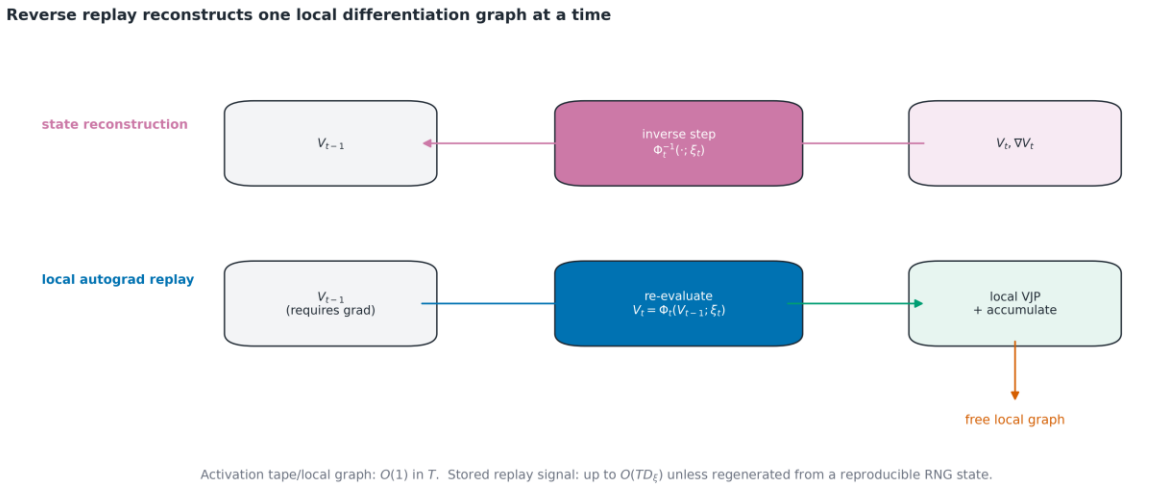


Figure 2.10 — Reverse-pass local replay. Each state is reconstructed, its local graph is rebuilt, gradients are accumulated, and the graph is released before moving to the preceding time step. Source: author's algorithmic schematic.

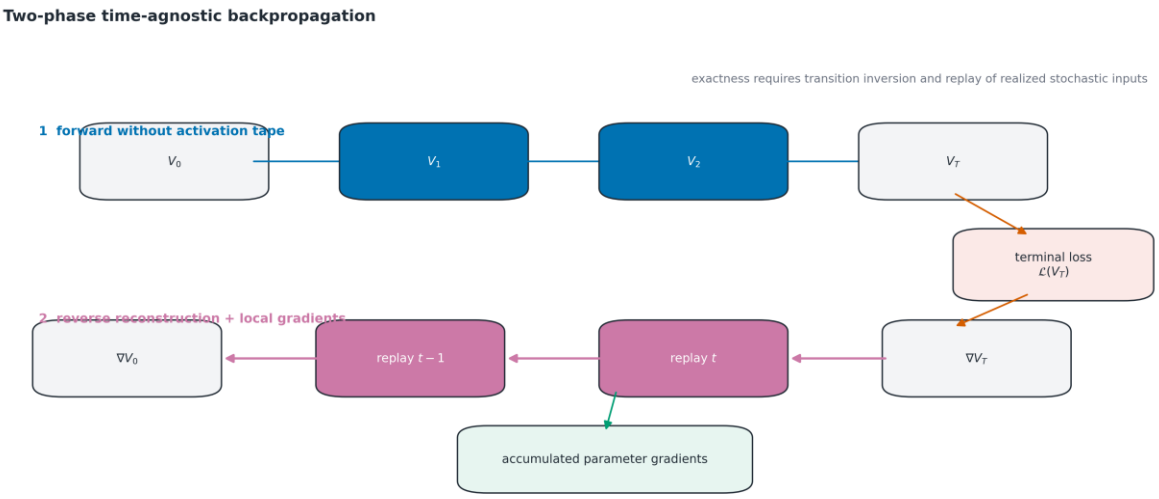


Figure 2.11 — Two-phase time-agnostic backpropagation. A tape-free forward phase is followed by algebraic reverse replay, local graph reconstruction, and gradient accumulation. Source: author's algorithmic schematic.

For a rigorous confirmation of the effectiveness of the developed method, we formulate and prove a lemma on the optimization of operating-memory consumption.

Lemma 1 (activation-tape complexity of deterministic time-agnostic backpropagation). *Let a deterministic discrete dynamic system have a trajectory of T steps, with a transition parameterized by a reversible neural network of L layers and complete per-layer state footprint D_s (for N tokens of width D, $D_s = ND$). Excluding model/optimizer state, and assuming the transition needs no T-dependent exogenous replay record, the peak transient activation graph needed for reverse replay is $O(L \cdot D_s)$ and therefore $O(1)$ in T.*

Proof.

1. Assume the state footprint at one layer is D_s. Under classical BPTT the algorithm caches all inputs for every layer $l \in \{1, \dots, L\}$ and every time step $t \in \{1, \dots, T\}$; hence the peak memory is $M_{\text{BPTT}} = T \cdot L \cdot D_s = O(T \cdot L \cdot D_s)$.
2. The proposed deterministic algorithm stores, during the forward pass, the terminal state and horizon-independent control information. The terminal state costs $O(D_s)$. Activations for $t < T$ and $l < L$ are deleted after use, so this activation term does not depend on T.
3. During the reverse pass the algorithm processes the steps sequentially: $t = T, T-1, \dots, 1$. At the current step t the algorithm reconstructs the inputs and unrolls the local computation graph of a single transition. The size of this graph is $O(L \cdot D_s)$.
4. Immediately after the gradients $\nabla_\theta L_{\text{loss}}$ and $\nabla_{x_{t-1}} L_{\text{loss}}$ are computed, this local graph is completely destroyed and its memory freed before the algorithm proceeds to step $t-1$.

5. Therefore, the maximum transient activation graph equals one local graph, $O(L \cdot D_s)$, plus horizon-independent gradient buffers. Model parameters and optimizer state are common base costs. If a stochastic recurrence stores one conditioning/noise tensor per step, the additional persistent replay term is $O(TD_\epsilon)$ (§2.4(i)); it is not covered by this deterministic lemma. ■

For comparative analysis, Table 2.1 presents the theoretical complexity estimates of the developed method against the existing approaches.

Table 2.1 — Theoretical estimate of computational complexity in multi-step optimization

Optimization method	**Horizon-dependent storage**	**Recomputation**	**Gradient semantics**
Standard BPTT	$O(T \cdot L \cdot D_s)$ activation tape	baseline C	reverse-mode gradient
Gradient checkpointing	schedule-dependent; $O(\sqrt{T} \cdot L \cdot D_s)$ for a balanced segment schedule	schedule-dependent, typically $> C$	same gradient in exact arithmetic; floating-point differences implementation-dependent
Developed method (deterministic recurrence)	$O(L \cdot D_s)$ transient local graph, $O(1)$ in T	approximately one local recomputation per reverse step	same gradient in exact arithmetic; numerical agreement measured

The table isolates horizon-dependent activation storage. Parameters, optimizer state, allocator overheads, and—in the stochastic extension—the replay signal are additional terms. Consequently, the square-root checkpoint row and any compute multiplier describe a particular schedule rather than a universal property [30, 31].

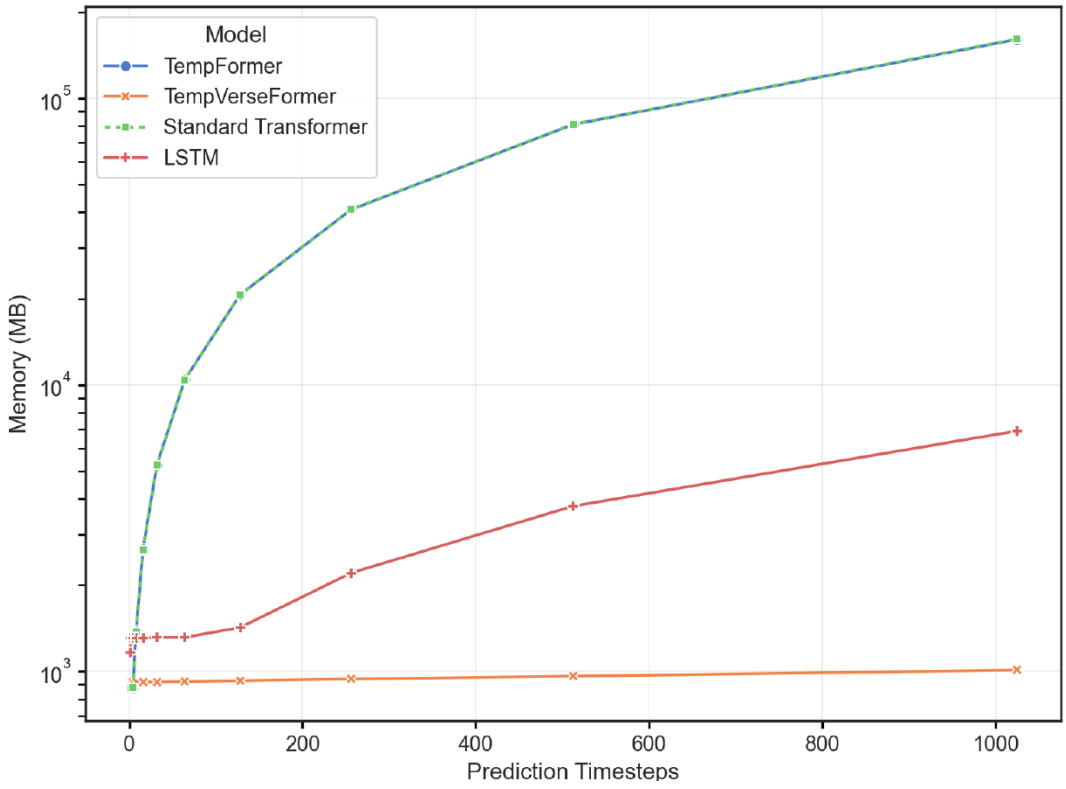


Figure 2.12 — GPU memory consumption versus prediction horizon. Published TempVerseFormer measurement at batch size 32. The reversible temporal model remains near 0.9 GB over 1–1,024 prediction steps, whereas the two non-reversible transformer variants grow to approximately 160 GB in the reported extrapolated/extended measurement and the LSTM grows more slowly. The logarithmic vertical scale must be retained when typesetting. Source: Kulyk, *Temporal modeling with reversible transformers*, Fig. 13, author preprint (CC BY 4.0), DOI 10.21203/rs.3.rs-6293520/v1; version of record DOI 10.1007/s00521-025-11707-3.

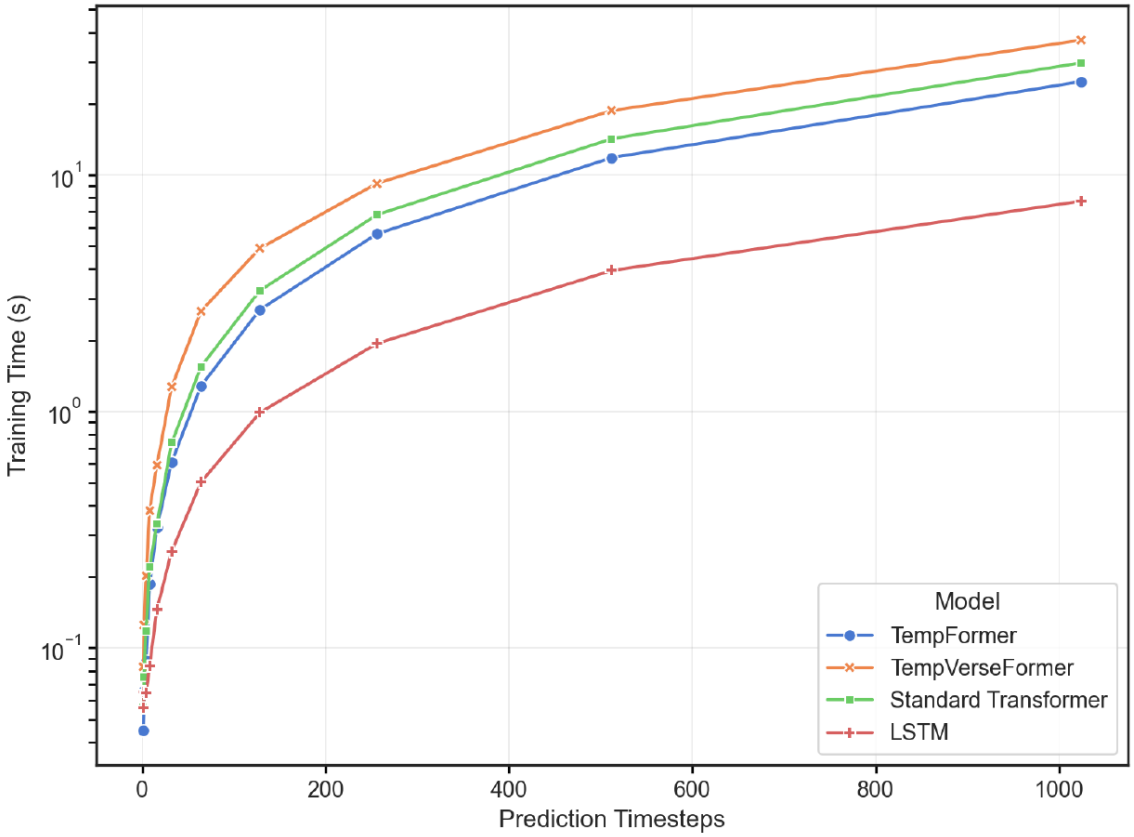


Figure 2.13 — Training time per step versus prediction horizon. Published comparison at batch size 32 and 1–1,024 prediction steps. Time grows with the prediction horizon for all four architectures; TempVerseFormer pays a compute premium relative to the matched non-reversible transformer while preserving the qualitatively different memory-scaling behavior in Fig. 2.12. The logarithmic vertical scale must be retained when typesetting. Source: Kulyk, *Temporal modeling with reversible transformers*, Fig. 14, author preprint (CC BY 4.0), DOI 10.21203/rs.3.rs-6293520/v1; version of record DOI 10.1007/s00521-025-11707-3.

As Fig. 2.12 shows, measured temporal-model memory remains nearly constant even at large prediction depths. Figure 2.13 also makes the trade-off explicit rather than cost-free: TempVerseFormer is slower per step than the matched TempFormer over the tested horizons, and all methods become slower as the horizon grows. Within this published configuration, the developed method is the only compared transformer whose activation-memory curve is practically independent of trajectory length. Algebraic reconstruction during the reverse pass therefore exchanges additional computation for the critically scarce resource — GPU memory — and makes horizons of hundreds or thousands of steps operationally possible when the non-reversible activation tape would exceed the device budget.

The implementation also supports **selective backpropagation** over a chosen terminal segment. The system can run the forward process to full length and reconstruct local graphs only for $[T - K_{\text{opt}}, T]$. This is a form of deliberately truncated or partial-loss optimization, not a unique gradient semantics: it omits learning signals through earlier steps. Skipped stages avoid activation-graph reconstruction, but the terminal/base state and any replay metadata still consume memory.

Extension to Stochastic Recurrences and Limits of Reversible Computation

The time-agnostic backpropagation method was substantiated above for deterministic transition functors (2.13). Many generative recurrences also inject stochastic conditioning, which creates an additional replay-information requirement. This section extends the accounting to that case and delimits when reversible replay is useful. The final Chapter 3 predictor samples stochastically but is trained on individual clean-context windows and does **not** differentiate through its rollout or sampler; the extension is therefore a separately measured method that could support a future rollout-through-time objective, not the training foundation of the reported context result.

(i) A conditionally invertible stochastic recurrence (store-the-noise). Consider the stochastic generalization of the temporal chain (2.13), in which the latent state h_t of the modeled process evolves as

$$h_t = F(h_{t-1}) + \sigma\epsilon_t, \epsilon_t \sim \mathcal{N}(0, I), \tag{2.14}$$

where F is a transition operator built from reversible (additive-coupling) blocks, σ is the noise scale, and ϵ_t is the noise sample of step t. Transformation (2.14), taken alone, is not invertible: the noise irreversibly injects new information. However, if the noise samples ϵ_t drawn during the forward pass are *stored*—the store-the-noise principle, extending the reversible recurrent networks of [110]—the preceding state becomes algebraically recoverable conditional on replaying the identical noise. Equations (2.14)–(2.15) state the principle in its simplest, *external-additive* form, in which the stored noise is subtracted before the inverse transition is applied:

$$h_{t-1} = F^{-1}(h_t - \sigma\epsilon_t). \tag{2.15}$$

The construction **implemented and measured in this dissertation** is the more general *conditioning-injected* form: within a coupled two-branch state (s_1, s_2), the stored noise enters the coupling functions as a conditioning argument,

$$(y_1, y_2) = (s_1 + F(s_2, \epsilon_t), s_2 + G(y_1)), \tag{2.16}$$

whose closed-form inverse subtracts the couplings in reverse order with the *same* stored conditioning replayed:

$$s_2 = y_2 - G(y_1), s_1 = y_1 - F(s_2, \epsilon_t). \tag{2.16'}$$

The additive-coupling inverse is algebraically valid for an *arbitrary* fixed conditioning argument, so (2.16') holds for any identically replayed signal injected this way (noise, actions, level context); the external-additive scheme (2.14)–(2.15) is recovered as the special case in which the noise enters only as a final additive term. All numerical properties quoted below are measured on the conditioning-injected construction (2.16)–(2.16'), which is the one realized in the software complex. Storing one noise tensor per step costs $O(T \cdot D_\epsilon)$. It has no layer or computation-graph factor and is much smaller than the $O(T \cdot L \cdot D_s)$ BPTT activation tape in the measured configuration, but it is still linear in T. Accordingly, the method has a constant-in-T **transient local activation graph**, not a universal $O(1)$ total-memory claim. Table 2.3 reports the resulting modest growth of measured peak memory.

The following properties of this construction were verified numerically on the implemented hierarchical multi-rate recurrent core (software complex of the dissertation; measurement details in Chapter 4):

- **Algebraic invertibility of the deterministic coupling:** maximum numerical state-reconstruction error 5.5×10^{-15} (fp64); for the Lipschitz-constrained coupling in fp32, 3.1×10^{-5}.
- **Conditional algebraic invertibility of the stochastic recurrence:** with the stored noise replayed, the maximum numerical reconstruction error over the trajectory is 8.4×10^{-13}; replaying *wrong* noise destroys the reconstruction (error of order 10^{1}). The replay signal is therefore necessary information for this implementation and must be counted.
- **Gradient direction agreement:** gradients obtained by reverse replay (reconstructing the implemented conditioning-injected states backward by (2.16') and rebuilding local graphs, as in Lemma 1) have cosine similarity 1.000000 with the full-BPTT gradients in the reported numerical test. Cosine similarity establishes directional agreement, not equality of gradient magnitude. The algebraic procedures implement the same chain rule under exact reconstruction in exact arithmetic; finite-precision componentwise or norm equality is not established by this test.

Thus the local reverse-replay construction transfers to stochastic multi-level recurrences when the identical conditioning is available, with explicit $O(TD_\epsilon)$ replay storage in the measured implementation. This extends the [A2] resource method; it is compatible with, but not required by or used in, the Chapter 3 predictor.

(ii) Invertibility does not imply stability: a Lipschitz diagnostic. A separate systemic question is whether the reversibility of the transition operator stabilizes the long-horizon behavior of the modeled process. The answer, established by direct measurement, is negative — and this delimits what the developed method may and may not be credited with. All recurrences in Table 2.2 are algebraically invertible under identical conditioning; they differ only in the spectral-norm bound imposed on the coupling function F. The measured perturbation growth $\|\delta_K\|/\|\delta_0\|$ of a free-running rollout over $K = 100$ steps spans four orders of magnitude:

Table 2.2 — Perturbation growth of algebraically invertible recurrences over $K = 100$ free-running steps as a function of the Lipschitz bound on the coupling

Coupling constraint	$\|\delta_{100}\|/\|\delta_0\|$	**Regime**
unconstrained	$333\times$	explodes
spectral norm, $Lip(F) \le 1$	$26{,}600\times$	**still explodes**
spectral norm, $Lip(F) \le 0.1$	$1.5\times$	bounded
spectral norm, $Lip(F) \le 0.02$	$1.0\times$	tightly bounded

For the residual map $G = I + F$, the triangle inequality gives the valid general upper bound

$$Lip(G) = Lip(I + F) \le 1 + Lip(F). \tag{2.17}$$

This bound is neither an equality nor a lower bound: cancellation can make $I + F$ contractive, and the bound alone cannot predict realized perturbation growth. Table 2.2 supplies the empirical result for the tested recurrences: imposing $Lip(F) \le 1$ did not prevent growth, whereas the tested constraints at 0.1 and 0.02 yielded bounded trajectories over 100 steps. These measurements motivate a small-coupling condition in this implementation; they do not prove a universal threshold [111, 112]. The systemic conclusion is narrower and valid: **algebraic invertibility enables reconstruction but does not imply stable forward dynamics.** Stability must be established separately for the recurrence being used. The final Chapter 3 predictor does not use this reversible recurrence or its Lipschitz constraint.

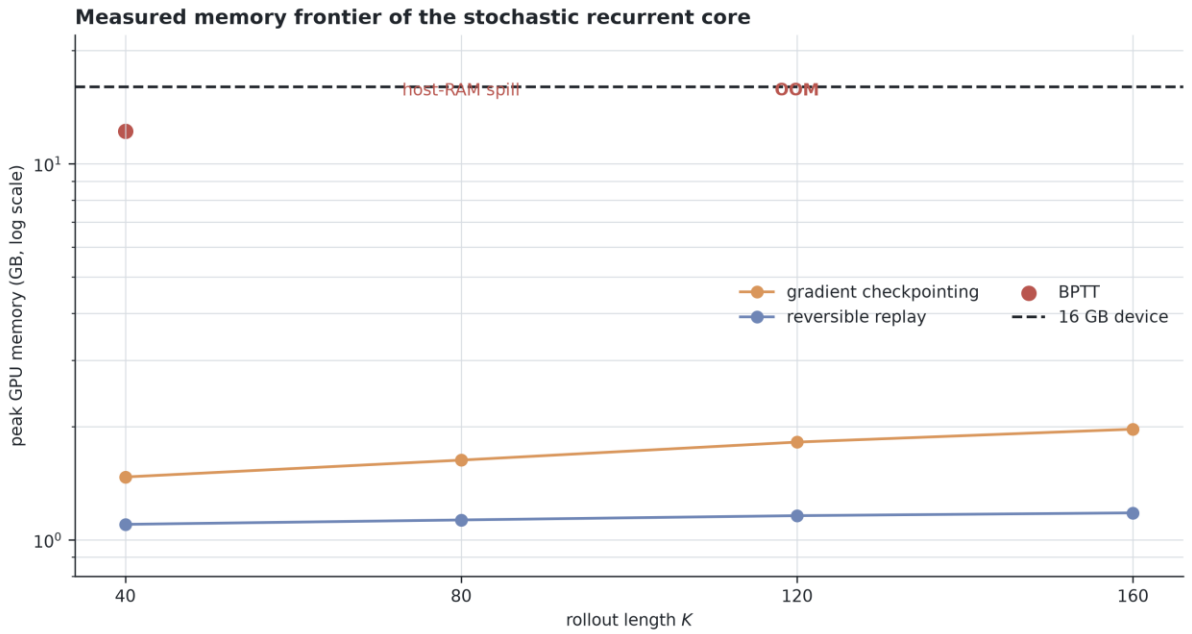


Figure 2.14 — Measured memory frontier of the stochastic recurrent core. Standard BPTT reaches 12.2 GB at $K = 40$, spills at $K = 80$ and cannot run at $K = 120$ on the 16 GB device; checkpointing grows slowly, while reverse replay stays near 1.1–1.2 GB through $K = 160$. Source: author's measurements summarized in Table 2.3; artifact provenance is listed in the reproducibility appendix.

(iii) The activation-tape frontier for autoregressive rollout (measured). The practical payoff of the extended method is measured on the real training loop of the implemented stochastic hierarchical recurrent core (three levels, batch 32, Adam optimizer, NVIDIA RTX 4060 Ti 16 GB; the full environment is specified in Chapter 4, §4.1.4). Table 2.3 gives the peak training memory as a function of the free-running rollout length K:

Table 2.3 — Measured peak training memory (MB) vs rollout length K: BPTT, gradient checkpointing, and the developed reversible reverse-replay on the same model

K	BPTT	Gradient checkpointing	Developed method (reversible)
40	12,162	1,471	1,091
80	23,305*	1,637	1,125
120	OOM	1,801	1,152
160	OOM	1,967	1,176

* At $K = 80$, BPTT exceeds the physical GPU memory and spills into shared host RAM, slowing a training step by a factor of ≈ 60 (from 0.74 s at $K = 40$ to 43.8 s); at $K = 120$ it fails with a hard out-of-memory error.

The frontier supports Lemma 1 and the stochastic accounting in the tested range: BPTT consumes 12.2 GB already at $K = 40$ and becomes infeasible at $K = 120$, while the developed method grows modestly from 1.091 to 1.176 GB through $K = 160$, making the measured long-horizon rollout training feasible on a consumer-grade 16 GB device. This curve includes the replay information; the constant-in-K claim applies to the transient local activation graph. **The interpretation of Table 2.3 must include the checkpointing column:** gradient checkpointing also remains feasible at all measured K (1.47–1.97 GB, growing slowly). The correct claim for the developed method is therefore a **constant activation-tape capability relative to vanilla BPTT**—with algebraically valid replay and measured gradient-direction agreement. Reverse replay also has lower peak memory than the checkpointing arm at every K in Table 2.3, but the temporal-rollout experiment does not report a matched checkpointing-versus-replay runtime comparison. It therefore establishes neither Pareto dominance nor Pareto equivalence between those two methods. This scoping is stated deliberately: the three-axis analysis below turns it into an applicability boundary.

(iv) The three-axis taxonomy of reversible computation and its measured boundary. The reversible mechanisms developed and reviewed in this chapter can be organized along three orthogonal axes of the computation graph on which reversibility can be exploited to avoid storing states:

1. **The depth axis** — reversibility across the layers of a network at a single step (RevNet and its descendants [32]): the literature baseline on which the developed blocks build.
2. **The temporal axis** — reversibility along the physical time of the modeled process (temporal chaining of §2.3–2.4 and the stochastic extension (2.14)–(2.16')). On the tested recurrence this axis **paid** because the BPTT activation trajectory dominated the avoidable horizon-dependent storage; inverse coupling reconstructed that trajectory, while replay noise remained explicitly counted. The measured result is Table 2.3.
3. **The computational axis** — reversibility along the *inner optimization loop*: the K pseudo-time steps of iterative refinement (gradient descent, MCMC/Langevin sampling, or a diffusion sampler) executed inside one generation step. Although this is also a chain, its stored trajectory state can be much smaller than the derivative graph rebuilt at each reverse step. The comparison must therefore be decided by state-versus-graph accounting rather than by graph shape alone. In the tested implementation, reversibility did not improve the practical trade-off over checkpointing.

The accounting for the third axis is as follows. Differentiating through a K-step gradient-descent (or Langevin) inner loop requires, at each reverse step, a Hessian-vector product and mixed second-order terms — i.e., rebuilding the differentiable graph of ∇E (a `create_graph`-class second-order graph) from a fresh forward pass, *regardless of how the trajectory state at that step was obtained*. Reversibility can

eliminate only the storage of the trajectory states themselves. **The direct four-way measurement on the implemented system** (naive full-graph / truncated / checkpointed / reversible differentiation of the inner loop, $K \in \{4,8,32,128\}$, micro-batch 12, fp32) gives: the naive full graph consumes 18.1 GB already at $K = 4$ (spilling to shared memory) and exhausts device memory at $K = 8$; the truncated, checkpointed, and reversible variants all remain flat at 5.282–5.296 GB through $K = 128$; and the reversible variant saves **14 MB = 0.26% of the peak** relative to checkpointing, at approximately twice the wall-clock time (recomputation). The per-step descent state (y, v) is 0.117 MB, so checkpointing's total state storage at $K = 128$ is 15.0 MB = 0.28% of its measured peak — an upper bound on what reversibility could ever reclaim on this axis. The analytic accounting band for the same quantity is ≈ 0.6–1.0%, and the crossover at which trajectory states would begin to dominate the second-order graph lies at $K \approx 5{,}000{-}30{,}000$ inner steps, far beyond any practically meaningful refinement depth. The underlying storage arithmetic — counting the bits per step that an optimizer trajectory consumes versus the volume contraction of the update map — is due to [113], **applied** here to the video-generation inner loop, not claimed as a new theorem. Moreover, a generic nonlinear gradient-descent update does not provide the closed-form inverse assumed by the local replay algorithm; the reversible momentum-buffer construction of Maclaurin et al. supplies additional replay information. In this measured configuration its kilobyte-scale state confirms that trajectory storage was not the binding constraint. Reversible-sampler variants for diffusion inner loops are already published [114, 115, 116], while related optimization-through-sampling work also uses checkpointing or truncation [117, 118].

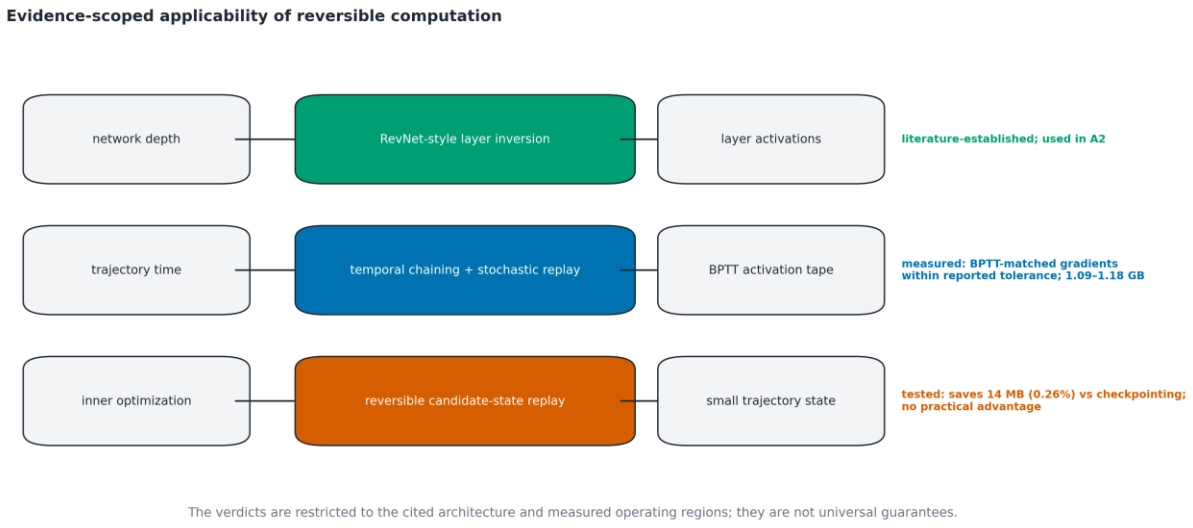


Figure 2.15 — Three axes of reversible computation and their measured applicability. Reconstruction can save activation storage along network depth and temporal recurrence. In the tested inner-optimization loop the model/optimizer base state dominates: reversible replay saves only 14 MB (0.26%

of peak) relative to checkpointing while approximately doubling wall time. Source: author's taxonomy and measurements; artifact provenance is listed in the reproducibility appendix.

The resulting **applicability boundary** is conditional rather than universal. Reversible replay is attractive when the avoidable activation trajectory is a material fraction of peak memory and the transition has a stable, economical inverse. In the measured temporal recurrence those conditions hold relative to vanilla BPTT. In the measured inner-optimization loop, the per-step state is only 0.28% of peak, reverse replay saves 0.26% relative to checkpointing, and recomputation roughly doubles wall time; checkpointing is therefore the appropriate method in that tested regime. A crossover would require much larger state relative to the derivative graph or an extreme inner depth (the present accounting estimates $K \approx 5{,}000\text{–}30{,}000$), so no benefit is claimed beyond the measured and analyzed conditions. The Chapter 3 predictor is single-window trained and does not presuppose this method.

2.5 Chapter Conclusions

In the second chapter of the dissertation, a complex of mathematical methods was developed and substantiated for resolving the structural, informational, and computational uncertainties in multi-step video generation systems. The main results are as follows.

1. In accordance with **Task 3** of the dissertation research, a method for estimating the spatio-temporal uncertainty of video data was developed through the transition from rigid patch tokenization to adaptive entropy-based decomposition (the V-BLT architecture). It was established that computing entropy over byte predictions yields per-pixel uncertainty maps that can guide non-uniform allocation. The evidence supports the reported [A1] setting; it does not prove globally optimal token boundaries.
2. To ensure the structural coherence of data under spatial linearization, the mathematical apparatus of N-dimensional rotary positional embedding (RoPE-ND) was developed. The derivation shows that its rotary score terms depend on relative displacement along each encoded axis. A coordinate-scaling mechanism provides a common convention for cross-level coordinates but does not guarantee learned attention localization. This is a level-appropriate instrument for architectures that require spatial coordinate transfer; the measured Chapter 3 predictor instead uses learned level/role/frame embeddings in joint attention, so its results do not depend on RoPE-ND.
3. In accordance with **Task 4**, activation-memory growth in vanilla BPTT was addressed for the tested recurrence. The TempVerseFormer mathematical architecture was developed from discrete reversible transformer blocks joined by the temporal-chaining mechanism.
4. The lemma on the computational complexity of the time-agnostic backpropagation algorithm was formulated for the deterministic recurrence: algebraic state replay reduces the transient activation graph from $O(T \cdot L \cdot D_s)$ to $O(L \cdot D_s)$, constant in trajectory length, while implementing

the same reverse-mode derivative in exact arithmetic. Parameters, optimizer state, and stochastic replay information are accounted separately.

5. The time-agnostic backpropagation method was **extended to stochastic multi-level recurrences** through a store-the-noise construction that is algebraically invertible given identical replay conditioning. Numerical state-reconstruction error is 8.4×10^{-13} and the reverse-replay and BPTT gradient vectors have cosine similarity 1.000000 in the reported test. This is directional agreement; gradient-magnitude equality is not inferred from cosine similarity. The stored noise costs $O(TD_\epsilon)$; it is smaller than the removed activation tape here but is not zero. The measured memory frontier of the real training loop confirms the practical payoff — BPTT consumes 12.2 GB at rollout length $K = 40$ and fails (OOM) at $K = 120$, whereas the developed method remains at ≈1.1–1.2 GB through $K = 160$, with gradient checkpointing remaining memory-feasible (1.47–1.97 GB). Thus the method provides a constant-local-activation capability relative to vanilla BPTT. Because matched runtime was not reported for the temporal-rollout replay and checkpointing arms, no Pareto-equivalence claim is made between them. The **applicability domain** of reversible computation was delimited by the three-axis taxonomy (depth — time — computation): the measured temporal-rollout axis paid and can support future rollout-through-time training of hierarchical video generators; the final Chapter 3 predictor is trained on individual windows and does not use that integration. The inner-optimization-loop implementation did not pay against checkpointing (a saving of $\approx 0.2\%$ at $K = 128$, with the state-versus-graph accounting applied after Maclaurin et al.); the stated crossover conditions bound this conclusion. Measurement also established that **invertibility does not imply stability**: the tested algebraically invertible recurrences span perturbation-growth regimes from $333\times$ to $1.0\times$ over 100 steps purely as a function of the Lipschitz bound on the coupling, so trajectory stability is a separate design requirement for the tested recurrence. This is an applicability result for reversible temporal recurrences; the final Chapter 3 predictor does not use reversible rollout training.

The chapter therefore hands two distinct instruments to the rest of the dissertation. [A1] provides a representation-allocation method and a multi-axis coordinate interface; [A2] and its stochastic extension provide an activation-tape storage/recomputation method with a measured boundary against checkpointing. Chapter 3 does not combine these modules into its predictor. Instead, it takes forward their systems question—how finite capacity should be allocated—and applies it to retained context/state. Chapter 4 keeps the corresponding evidence streams separate and compares their operating regions in the final synthesis.

The results of this chapter are published in the author's works **[A1]** (§§2.1–2.2), **[A2]** (§§2.3–2.4). The stochastic-recurrence extension and three-axis applicability taxonomy are dissertation developments building on [A2]; they are not attributed to the context-packaging article [A4]. These stable labels are bound mechanically to the final numbered publication list.

Chapter 3 — A Hierarchical Mathematical Model for Video Generation with Long Multi-Stream Context

The preceding chapters decomposed the video-generation system and developed separate instruments for entropy-based representation, positional structure, and reversible temporal optimization. This chapter develops the dissertation's context/state-memory strand: a hierarchical mathematical model of video-sequence generation in a compact continuous latent state space with **long-span multi-stream context**. The demonstrated predictor carries long-range history in a context stream; a spatially downsampled coarse stream is its measured hierarchical implementation, while temporally sparse full-resolution history is evaluated as an alternative package. Context signals are processed in one joint-attention mechanism, and target windows are generated by a v-parameterized latent diffusion core selected by the controlled mechanism study of Chapter 4. RoPE-ND and reversible temporal optimization remain complementary dissertation methods, but they are not components of this executed predictor.

Two methodological commitments frame the chapter. First, the model is described as implemented and verified in the frozen research artifacts: every architectural constant quoted below belongs to the measured system, not to an unexecuted proposal. Code-to-claim mappings are consolidated in the reproducibility appendix rather than embedded in the scientific narrative. Second, alongside the generative model itself, the chapter formalizes the **measurement instrument** — a purpose-built memory-horizon testbed with a re-entry-stratified evaluation protocol (§3.4). Under the systems-analysis methodology of specialty 124, the instrument is a deliverable of equal rank with the model: it is what operationalizes the trajectory-consistency criterion of Chapter 1 (§1.4.5) into an exactly computable, statistically disciplined measurement procedure.

3.1 Formalization of the Hierarchical Latent State Space

The chapter's organizing object is a **context-stream family**. Stream i is represented by

$$S_i = (\ell_i, s_i, n_i, a_i),$$

where ℓ_i is the representation level, s_i the temporal stride, n_i the retained slot count, and a_i the lag of the most recent anchor. Its lag set is $K_i = \{a_i + js_i : j = 0, \dots, n_i - 1\}$. If one slot at level ℓ contains $q_\ell = H_\ell W_\ell$ tokens, then

$$B_{\text{ctx}} = \sum_i n_i \, q_{\ell_i}, R = max_i[a_i + (n_i - 1)s_i].$$

This explicit anchor geometry avoids treating reach as a hard-coded consequence of one stride. A system configuration is a set of streams consumed by one shared attention backbone. In this vocabulary, a **flat** configuration is a single fine-resolution stride-1 stream; a **temporal (rate) hierarchy** has two or more tick rates at any resolution; a **resolution hierarchy** has two or more spatial resolutions; a **deep hierarchy** has three or more streams; the **context budget** counts context tokens only, with target tokens, total sequence length, and compute reported separately (§4.1). The two-level coarse-plus-fine model developed next is the family's per-level-decodable resolution form — the dissertation's demonstrated system, not the family's definition.

3.1.1 Two-Level State Decomposition and Frozen Autoencoder

Chapter 1 (§1.2.2) motivated explicit hierarchy as a resource-allocation strategy rather than a logical necessity. The developed model tests that strategy with $L = 2$ levels, which is the minimal configuration that exhibits the phenomenon under study (a low-rate upper level able to carry memory that the detailed lower level cannot afford), while remaining fully trainable and evaluable on a single consumer-grade GPU — a deliberate scoping decision consistent with the resource constraints formalized in Chapter 1.

The state of the video process at frame t is represented not by the pixel frame $x_t \in \mathbb{R}^{64\times64}$ but by a pair of latent codes produced by a shared convolutional encoder $\mathcal{E}$:

$$z_t = (z_t^c, z_t^f) = \mathcal{E}(x_t), z_t^c \in \mathbb{R}^{16\times4\times4}, z_t^f \in \mathbb{R}^{16\times8\times8}, \tag{3.1}$$

where z_t^c is the **coarse** (macro-level) code — 16 channels on a 4×4 spatial grid, 256 numbers per frame — and z_t^f is the **fine** (micro-level) code — 16 channels on an 8×8 grid, 1{,}024 numbers per frame. Both codes pass through a $\tanh$ nonlinearity and are therefore bounded. The coarse code is, by construction and by training incentive, the low-rate "layout" description of the scene (global composition and camera position); the fine code carries texture and stroke detail. In the macro/meso/micro vocabulary of §1.2.2, the coarse level plays the macro role and the fine level the micro role; the meso level is absorbed — a two-level pyramid is the minimal sufficient instantiation for the claims under test.

The defining structural property of the autoencoder — adopted from the hierarchical latent video modeling line of work [37, 20, 36] in minimal form — is **per-level decodability**: each level is *independently* decodable to the full frame by its own decoder,

$$\hat{x}_t^c = \mathcal{D}_c(z_t^c), \hat{x}_t^f = \mathcal{D}_f(z_t^f), \tag{3.2}$$

so that neither level is a mere residual of the other: the coarse code alone suffices to reconstruct a (blurred but correctly composed) frame, and the fine code alone suffices to reconstruct a detailed

frame. This property is enforced during autoencoder training by random-level dropout: at each training step exactly one of the two reconstruction losses (L1 + MSE) is supervised, with the coarse branch up-weighted ($\times 4$) so that the low-rate level is not ignored. The trained autoencoder has 1.85 M parameters and reaches a validation reconstruction error of 0.0020 (MSE, fine level) on the testbed data of §3.4.

Two systemic decisions about this autoencoder follow a fixed-interface and isolation principle (§3.1.3) and are stated here explicitly:

1. **The autoencoder is frozen.** It is trained once, on the training clips only, and never fine-tuned afterwards; during the training and operation of the predictive core its parameters are algorithmically excluded from the gradient graph. The latent space is therefore a *fixed coordinate system* for the entire study — the matched-capacity regression and diffusion predictors compared in Chapter 4 operate in literally the same state space. Freezing makes the state coordinates invariant during prediction and keeps the representation interface identical across compared mechanisms.
2. **The latent interface is standardized.** The raw $\tanh$-bounded codes are small in scale (per-channel standard deviations average 0.121 for the coarse and 0.162 for the fine level). Every latent channel c of every level $\ell \in \{c, f\}$ is z-scored with statistics computed **on the training set only**:

$$\tilde{z}_t^{(\ell)}[c] = \frac{z_t^{(\ell)}[c] - \mu_c^{(\ell)}}{\sigma_c^{(\ell)}}, \sigma_c^{(\ell)} \geq 10^{-4}, \tag{3.3}$$

and all held-out data are standardized with the *same* constants. This step is part of the model definition, not an implementation detail: the diffusion process of §3.2.3 injects noise at unit scale, and an unstandardized latent (scale ≈ 0.12–0.16) silently mis-scales the entire noise schedule — the initial noise sample is then 4–7× off-scale relative to the data manifold. Chapter 4 (§4.2) documents that this single scaling error is capable of reversing mechanism-level experimental conclusions; the standardization (3.3) is therefore elevated to a protocol requirement. In the remainder of the chapter, z denotes the standardized latents.

The pixel decoders $\mathcal{D}_c, \mathcal{D}_f$ participate only downstream of the predictive core through the frozen interface. Consequently, pixel-space rendering cannot update the dynamics core, and all pixel-space metrics of §3.4.3 use the same fixed decoder for every compared system.

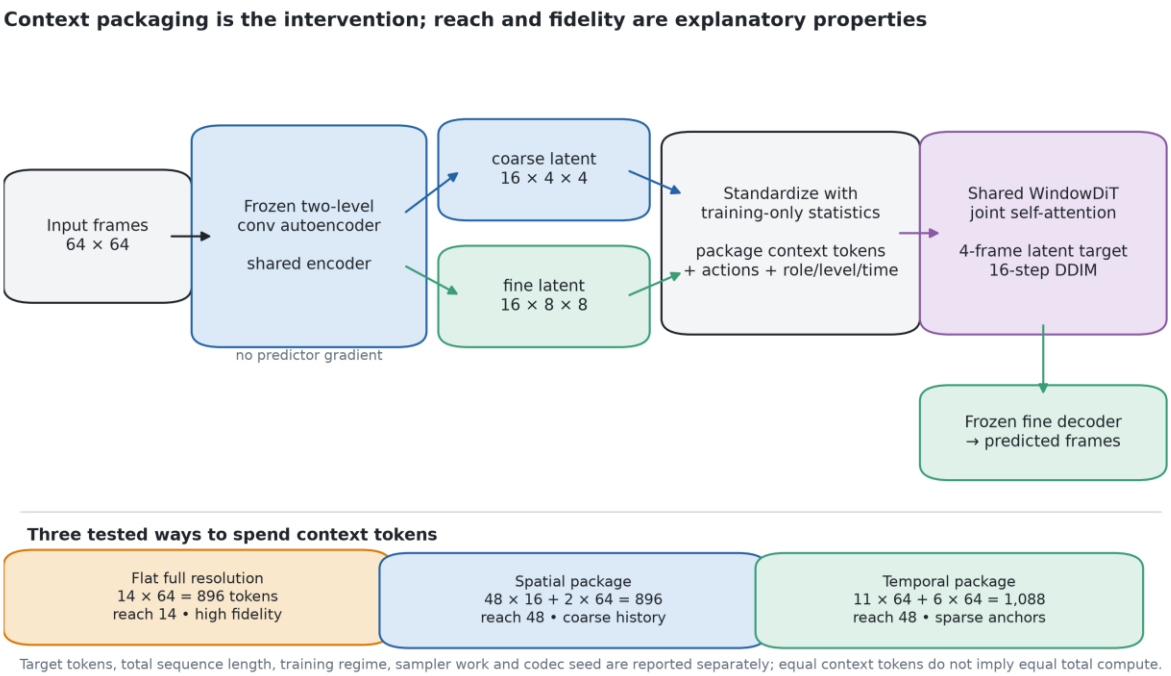


Figure 3.1 — Model architecture and context-packaging alternatives. *Content:* input frames → frozen two-level conv-AE (shared encoder trunk; coarse $16 \times 4 \times 4$ and fine $16 \times 8 \times 8$ taps); training-only latent standardization; the shared WindowDiT generation core consuming a selected flat, spatial or temporal package together with actions; a jointly predicted four-frame latent window; and the frozen fine decoder. The lower panel reports exact package accounting and makes the 1,088-token temporal versus 1,152-token spatial comparison explicitly near-matched rather than exact. *Source:* author's schematic generated from the frozen interface; file and generator provenance are listed in the reproducibility appendix.

3.1.2 Cross-Level Context Transfer: from Cross-Attention to Joint Attention

Generating the levels independently would permit coarse and fine targets to disagree. The implemented mechanism therefore places all context and target tokens from both levels into **one joint self-attention sequence** (§3.2.1). Within every layer, fine tokens can attend to coarse tokens and vice versa; level, temporal position, and role are supplied through additive embeddings and adaptive-normalization conditioning (§3.2.2).

This design has three relevant consequences:

1. **Joint cross-level conditioning.** Both target levels are denoised in one pass under a shared noise level (§3.2.3), so each refinement step can exchange information across resolutions. This is an inductive bias toward hierarchical consistency, not a guarantee; imperfect learned routing, representation loss, or decoding can still produce cross-level disagreement.

2. **Asymmetric information budgets without asymmetric wiring.** Long-span observed history enters only as coarse tokens (48 frames × 16 tokens), while the fine context covers 6 recent frames × 64 tokens. The shared architecture is bidirectional, but the package deliberately makes the coarse stream the carrier of **observed long-range evidence** (§3.3.4). Model priors and recent fine evidence can still affect either target level.
3. **Learned rather than hard-coded spatial routing.** Correspondence between the 4×4 coarse grid and 8×8 fine grid is available through learned per-level spatial embeddings and joint attention; no hard child-to-parent receptive-field mask is used. RoPE-ND remains the separate coordinate-interface result of [A1], not a component or an explanation of the measured Chapter 4 package effects.

3.1.3 Information Asymmetry and Detached Gradient Boundaries

Within a prediction step the levels are generated jointly, not sequentially. The asymmetry lies in **what observed history each level receives**: only the coarse context spans the full memory horizon. This licenses the statement that long-span retrieved evidence is carried by the coarse stream. It does not license a macro-first execution claim or guarantee that a fine prediction cannot contradict a coarse one.

Gradients are detached at two deliberate system boundaries:

1. **Between the representation subsystem and the prediction core.** The autoencoder is frozen (§3.1.1): no gradient of any prediction objective ever reaches $\mathcal{E}$, $\mathcal{D}_c$, or $\mathcal{D}_f$. The state coordinate system is a fixed constant of the control problem. This isolates predictive-mechanism comparisons from representation drift.
2. **Between past and future along the rollout.** At every autoregressive step (§3.3.1), the context buffers contain previously generated latents that enter the network as constants: during training no gradient propagates from the current window's loss into earlier windows (training is single-window by design, §3.2.3), and during generation the sampled window is appended to the buffers without a gradient graph (sampling runs under no-grad). Consequently, the reported training objective estimates single-window gradients and does not optimize cross-window credit assignment.

The implemented system therefore combines a frozen representation interface, single-window training, and joint cross-level generation. The coarse level is distinguished by *what it remembers*, not by a separate execution phase.

3.2 Generative Core: Windowed Latent Diffusion

The primary generative mechanism is an iterative-refinement (denoising diffusion) core. Chapter 4 (§4.2) compares direct regression and denoising diffusion under a shared latent/context interface and closely matched backbone capacity, with per-candidate and total candidate-generation work reported rather than equated. A separate official-code, 14.66 M-parameter energy-based capability study tests

landscape ordering and descent reachability; it is not a third matched-capacity cell. The **selection objective** is generative coverage and sharp commitment on the single-window task: diffusion provides the strongest best-of-8 coverage among the two matched-capacity heads, whereas the tested energy-based descent does not reach structured outputs. Regression remains an important task-dependent control and performs better in deterministic best-of-1 self-fed rollout. Thus diffusion is selected for the stochastic generative frontier, not declared universally superior; the later regression result defines a fidelity/stability boundary rather than being hidden by the selection.

3.2.1 Token Sequence and Component-Wise Conditioning

The prediction problem is windowed. Let t be the first frame to predict, $W = 4$ the window length, H_c the coarse context length and w_f the fine context length (system configuration: $H_c = 48$, $w_f = 6$; §3.3.4 introduces the control configurations). One prediction step consumes:

- the coarse context $C^c = (z^c_{t-H_c}, \dots, z^c_{t-1})$ — the last 48 coarse latents;
- the fine context $C^f = (z^f_{t-w_f}, \dots, z^f_{t-1})$ — the last 6 fine latents (the fine context frames are by construction the *last* w_f frames of the coarse window, so the two contexts are temporally aligned and satisfy $w_f \le H_c$);
- the recorded control actions $a_t, \dots, a_{t+W-1}$, $a \in \{-1, 0, +1\}$ (§3.4.1), where a_{t+j} is the action that moves the process from frame $t+j-1$ to frame $t+j$;
- the noisy target window $y = (y^c_{t..t+3}, y^f_{t..t+3})$ at noise level τ (during generation — the current iterate of the sampler).

Every latent map is linearized into spatial tokens (one token per spatial cell, its 16 channels linearly projected to the model width d): a coarse frame contributes $4 \times 4 = 16$ tokens, a fine frame $8 \times 8 = 64$ tokens. The full input of one prediction step is the single joint sequence

$$S = \underbrace{[\text{coarse ctx: } 48 \times 16]}_{768} \| \underbrace{[\text{fine ctx: } 6 \times 64]}_{384} \| \underbrace{[\text{targets: } 4 \times (16 + 64)]}_{320} = 1472 \text{tokens}, \qquad (3.4)$$

of which $48 \cdot 16 + 6 \cdot 64 = 1152$ are context tokens — the context-token budget that the matched-budget flat control of §3.3.4 is required to equal exactly.

Each token carries four additive identity embeddings: a learned spatial position embedding (one table per level), a **level** embedding (c/f), a **role** embedding (context/target), and a **frame-index** embedding. Frame indices are absolute within the step: context frames occupy indices $0 \dots 47$ (fine context frames share the indices $42 \dots 47$ of their coarse counterparts), and the four target frames occupy indices $48 \dots 51$ — the frame-embedding table has 52 entries. On top of the identity embeddings, every token receives a per-token conditioning vector c used by the adaptive normalization of every block:

$$c = e_{\text{level}} + e_{\text{frame}} + e_{\text{role}} + \begin{cases} e_\tau(0), & \text{context tokens (clean, noise level 0)}, \\ [2\text{pt}]e_\tau(\tau) + e_{\text{act}}(a_{t+j}), & \text{target tokens of frame } t+j, \end{cases} \tag{3.5}$$

where $e_\tau(\cdot)$ is a sinusoidal-MLP embedding of the continuous noise level and e_{act} is a learned embedding of the action alphabet. Two properties of (3.5) are essential. First, context tokens are conditioned at noise level 0 — the network is explicitly told which part of the sequence is clean evidence and which is the object of refinement; the prediction loss is computed on target tokens only. Second, the action conditioning is **per-target-frame**: frame $t+j$ receives exactly its own action a_{t+j}, so the network never needs to disentangle a summed multi-step action code — each generated frame is bound to the control signal that produced it.

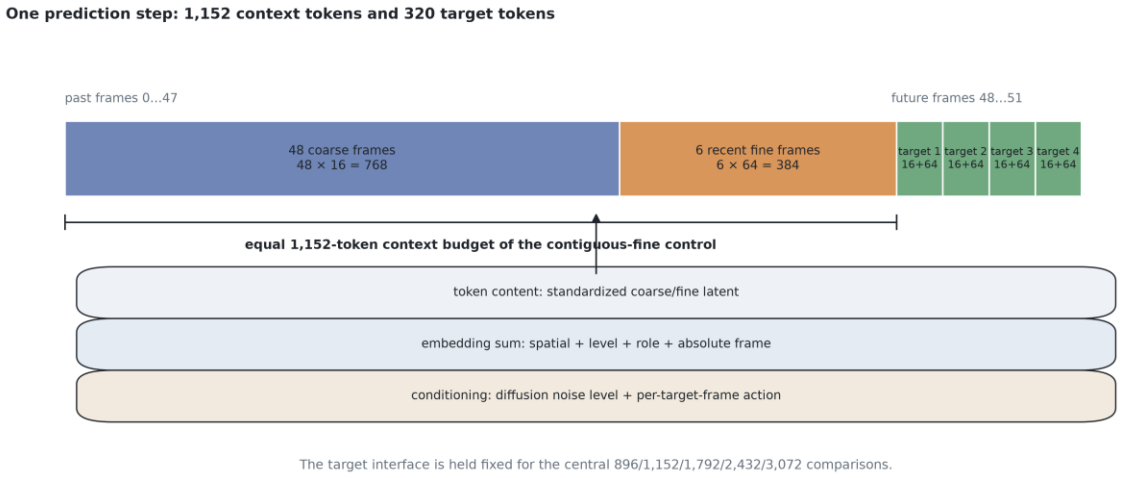


Figure 3.2 — Token layout for one prediction step. The 1,472-token sequence contains 768 coarse-context tokens, 384 recent fine-context tokens and four 80-token coarse-plus-fine targets. The bracket identifies the 1,152-token context budget matched by the central contiguous-fine control; the lower strips show the additive token embeddings and per-target action/noise conditioning. *Source:* author's schematic of the frozen token interface; deterministic file and code provenance are listed in the reproducibility appendix.

3.2.2 Transformer Backbone with Adaptive Normalization

The sequence (3.4) with conditioning (3.5) is processed by a stack of $N_{\text{blk}} = 8$ pre-norm transformer blocks of width $d = 384$ with 6 attention heads and MLP expansion ratio 4 (22.18–22.19 M trainable parameters for the two-level arms; the 0.01 M difference is due to the package-specific input/output interface). Attention is full (every token attends to every token): the causality of the overall system is enforced by sequence construction and by the autoregressive recursion (§3.3.2), not by an attention mask inside the step.

Each block applies **adaLN-Zero conditioning** [4]: the per-token conditioning vector c is mapped (SiLU → linear) to six modulation signals $(\gamma_1, \beta_1, g_1, \gamma_2, \beta_2, g_2)$, and the block computes

$$mod(h; \beta, \gamma) = h(1 + \gamma) + \beta, \tag{3.6}$$

$$h \leftarrow h + g_1 \cdot Attn(mod(LN(h); \beta_1, \gamma_1)), h \leftarrow h + g_2 \cdot MLP(mod(LN(h); \beta_2, \gamma_2)), \tag{3.7}$$

with the modulation projection zero-initialized, so every block starts as the identity — the standard stable initialization for a denoiser trained as a residual refiner. Queries and keys are RMS-normalized per head. After the final block, only the 320 target tokens are read out: each level has its own final adaptive layer-norm (again zero-initialized) and its own zero-initialized linear head projecting $d \to 16$ channels, after which the tokens are reshaped back into the latent geometry — $(W, 16, 4, 4)$ for the coarse and $(W, 16, 8, 8)$ for the fine level. The backbone and context interface are shared with the regression control, and trainable parameter counts are matched within the reported tolerance. Mechanism-specific pathways remain explicit: diffusion receives a corrupted target and noise-level conditioning, predicts velocity, and uses iterative DDIM inference; regression receives zero target placeholders, predicts clean latents with smooth-L1 loss, and uses one forward pass. The energy-based arm has its own scalar-energy objective and gradient-descent inference contract (§4.2). "Matched capacity" therefore refers to the controlled shared backbone/scale, not to identical inputs, objectives, or inference.

3.2.3 v-Parameterization

Why a *window* of $W = 4$ frames rather than one frame at a time? The reason is rollout-consistency of the training distribution. The autoregressive rollout of §3.3 appends *all* frames it generates to the context buffers; if training predicted only a single frame at offset $k = 4$, the rollout context would consist of stride-4 samples while the training context consisted of consecutive frames — a train/rollout layout mismatch built into the protocol itself. Predicting a window of W *consecutive* frames per step and advancing the recursion by exactly W keeps the buffer layout and temporal indexing consistent with training. It does not make the values identically distributed: training contexts are ground truth, whereas self-fed rollout contexts contain model outputs and remain subject to exposure bias [26, 25, 27].

Let $z_0 = (z^c_{t..t+3}, z^f_{t..t+3})$ denote the clean (standardized) target-window latents. The forward diffusion process corrupts them with Gaussian noise $\varepsilon \sim \mathcal{N}(0, I)$ at a noise index $\tau \sim U\{1, \dots, T\}$, $T = 1000$, *shared across the window's frames and both levels within a training sample* (one τ per sample — the coupling that ties the two levels and four frames to a common refinement trajectory):

$$y = \sqrt{\overline{\alpha}_\tau} z_0 + \sqrt{1 - \overline{\alpha}_\tau}\varepsilon, \tag{3.8}$$

with the cosine noise schedule [2]

$$\overline{\alpha}_\tau = clip\left(\frac{f(\tau)}{f(0)}, 10^{-4}, 0.9999\right), f(\tau) = \cos^2\left(\frac{\tau/T + s}{1+s} \cdot \frac{\pi}{2}\right), s = 0.008. \tag{3.9}$$

The network is trained in the **v-parameterization** [119]: the regression target is the velocity

$$v = \sqrt{\overline{\alpha}_\tau}\varepsilon - \sqrt{1-\overline{\alpha}_\tau}z_0, \tag{3.10}$$

which interpolates between noise prediction (at low noise) and sign-flipped data prediction (at high noise) and is well-conditioned across the whole schedule. Denoting by $v_\theta(y, C^c, C^f, \tau, a)$ the two-level output of the backbone (§3.2.2), the training objective is the unweighted sum of the two levels' mean-squared v-errors:

$$\mathcal{L}(\theta) = \mathbb{E}_{z_0,\tau,\varepsilon}[MSE(v_\theta^c, v^c) + MSE\big(v_\theta^f, v^f\big)]. \tag{3.11}$$

Here each MSE averages over all batch, channel, target-frame, and spatial entries within that level; the two level means are then summed with equal weight, exactly as in the implementation. Equal weighting is meaningful only because of the standardization (3.3), which puts both levels' latents at unit per-channel variance; without it the loss would be silently dominated by whichever level's raw scale happened to be larger.

Optimization protocol (constants of the validated system): AdamW, learning rate $3 \cdot 10^{-4}$, weight decay 10^{-4}; linear warmup over the first 2{,}000 steps to a constant learning rate (restart-safe by design — training is resumable from atomic checkpoints); gradient-norm clipping at 1.0; batch size 16–32; 30{,}000 training steps per system arm; an exponential moving average (EMA) of the parameters with decay 0.999 maintained throughout, with *all* evaluation performed on the EMA weights. Training uses clean (ground-truth) contexts only — no self-generated context injection in the base protocol; the pre-registered design reserves context-noise augmentation as a single budgeted fallback. It was not activated: the observed deep-horizon sharpness-retention failure is reported as a boundary result rather than repaired by an adaptive retraining branch.

Teacher-forcing scope. The long-horizon capability reported in Chapter 4 is achieved *without* backpropagation through the rollout — the model is trained on single windows with clean contexts, and its long memory is an inference-time property of the information design (§3.1.2), not of a long-horizon training objective. If a future rollout-through-time objective were adopted, the reversible replay method of Chapter 2 would be one candidate storage policy alongside checkpointing. That combination was not implemented or required for the evidence reported here.

3.2.4 DDIM

Generation inverts the diffusion with a deterministic DDIM sampler [52] over $N_{\mathrm{DDIM}} = 16$ steps on a rounded-linear sub-grid $\tau_1 = T > \tau_2 > \cdots > \tau_{16} \geq 1$ of the training schedule. Starting from pure noise $y^{(1)} \sim \mathcal{N}(0, I)$ over the whole two-level window, each step evaluates the network once and converts its v-output into the implied clean-data and noise estimates:

$$\hat{z}_0^{(i)} = \sqrt{\overline{\alpha}_{\tau_i}}y^{(i)} - \sqrt{1-\overline{\alpha}_{\tau_i}}v_\theta(y^{(i)},\cdot), \hat{\varepsilon}^{(i)} = \sqrt{1-\overline{\alpha}_{\tau_i}}y^{(i)} + \sqrt{\overline{\alpha}_{\tau_i}}v_\theta(y^{(i)},\cdot), \tag{3.12}$$

$$y^{(i+1)} = \begin{cases} \sqrt{\overline{\alpha}_{\tau_{i+1}}}\hat{z}_0^{(i)} + \sqrt{1-\overline{\alpha}_{\tau_{i+1}}}\hat{\varepsilon}^{(i)}, & i = 1,\dots,N_{\mathrm{DDIM}}-1, \\ [2\mathrm{mm}]\hat{z}_0^{(N_{\mathrm{DDIM}})}, & i = N_{\mathrm{DDIM}}, \end{cases} \tag{3.13}$$

i.e. the deterministic ($\eta = 0$) DDIM update; the sampler's only stochasticity is the initial noise draw, which the evaluation protocol controls with common random numbers (§3.4.4). The computational price of generation is thus fixed: 16 network evaluations per 4-frame window — 4 network function evaluations per generated frame.

3.2.5 Regression Control Head

For the mechanism claims of Chapter 4 (hypothesis H2: the generative mechanism earns its keep at rollout), the system admits a drop-in **regression** variant on the identical backbone: the noisy target inputs are replaced by zeros, the noise level is fixed at $\tau \equiv 0$, the output is interpreted directly as $\hat{z}_0$, and the objective is the smooth-L1 error on both levels. Its "sampling" is a single forward pass. Backbone scale, tokenization, context design, optimizer family, and evaluation protocol are controlled against the diffusion core. The mechanisms necessarily differ in target input, noise-level conditioning, objective, output interpretation, and inference count: diffusion denoises a corrupted target iteratively, while regression predicts once from zero placeholders. The chapter records this variant because the mechanism claim is comparative and these controlled shared factors delimit what the comparison can support.

3.3 Autoregressive Rollout with Ring-Buffer Memory

The developed technology operates as a fully **autonomous** autoregressive predictor: its inputs are past video frames (through the latent interface) and the recorded low-dimensional control track; no exogenous modality (in particular, no text) steers the generation. The control track is not a side channel of convenience: in the systems framing of Chapter 1 the actions *are* part of the observed state of the control system, and Chapter 4 (§4.2) documents that withholding them forces every mechanism to hedge over the control-marginal future and manufactures a spurious blur verdict. "Autonomous" therefore means autonomous with respect to semantic side information, while remaining conditioned on the recorded control signal required by the modeled process.

3.3.1 Rollout Recurrence

The state of the rollout between prediction steps is the pair of **ring buffers**

$$B_n^c = (\hat{z}_{t_n-H_c}^c, \dots, \hat{z}_{t_n-1}^c), B_n^f = (\hat{z}_{t_n-w_f}^f, \dots, \hat{z}_{t_n-1}^f), \tag{3.14}$$

holding the last $H_c = 48$ coarse and the last $w_f = 6$ fine latents, where $\hat{z}$ denotes ground-truth latents during warm-up and self-generated latents thereafter. The recursion is:

Algorithm 3.1 — Autoregressive rollout with ring-buffer memory

Input: ground-truth frames $x_{0..H_w-1}$ for warm-up ($H_w = 48$),

recorded actions $a_{1..T}$, frozen AE $(\mathcal{E}, \mathcal{D})$, trained EMA weights

θ, horizon T.

Output: predicted frames $\hat{x}_{H_w..T-1}$.

1. Encode and standardize the warm-up frames; initialize B^c, B^f with

their last H_c and w_f latents; $t_0 \leftarrow H_w$.

2. **for** $n = 0,1, \ldots, \lfloor (T - H_w)/W \rfloor - 1$ **do**

3. read the actions $a_{t_n}, \ldots, a_{t_n+W-1}$ of the current window;

4. sample the window by DDIM (§3.2.4):

$(\hat{z}^c_{t_n..t_n+3}, \hat{z}^f_{t_n..t_n+3}) \leftarrow \mathrm{DDIM}_{16}(v_\theta; B^c_n, B^f_n, a_{t_n..t_n+3})$;

5. append all W predicted latent pairs to the buffers; drop the oldest W

entries of each (ring update); $t_{n+1} \leftarrow t_n + W$;

6. decode predictions for evaluation:

$\hat{x}_{t_n+j} = \mathcal{D}_f(\hat{z}^f_{t_n+j})$,

$j = 0..3$ (through un-standardization and the frozen fine decoder).

7. **end for**

On the 200-frame evaluation clips of §3.4: warm-up 48 frames, then

$(200 - 48)/4 = 38$ rollout steps, i.e. 152 self-generated frames per clip — more than three

full loop periods of the testbed world.

Because the training windows are consecutive and the recursion advances by exactly W, rollout buffers have the same **shape and temporal indexing** as training contexts. Their values are not distributionally identical: after warm-up they contain self-generated latents, so exposure bias and error accumulation remain explicit limitations (§3.2.3). The warm-up length is **universal across all compared systems** (48

frames even for arms whose context is shorter, e.g. the flat control warms its 18-frame buffer from ground-truth frames 30–47): every arm starts generating at the same frame of the same clip, so the per-(clip, horizon) records of §3.4 pair exactly across arms.

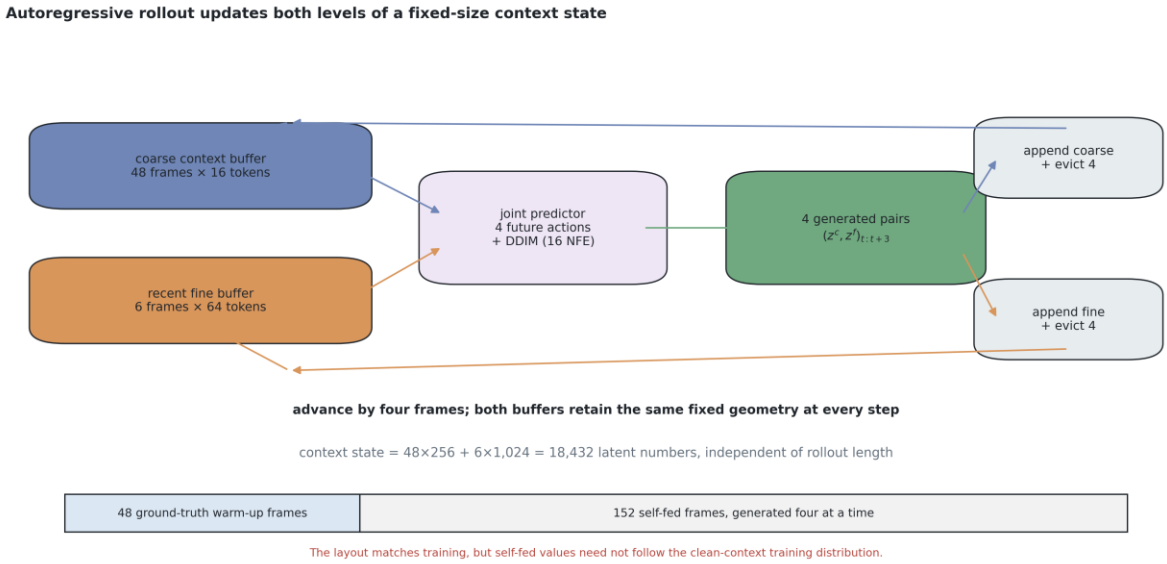


Figure 3.3 — Ring buffers for autoregressive rollout. After the common 48-frame ground-truth warm-up, each step combines the fixed 48-slot coarse and 6-slot fine buffers with four actions, samples four latent pairs with DDIM-16, and appends/evicts four positions. The stored state is 18,432 latent numbers and does not grow with rollout length. *Source:* author's schematic of Algorithm 3.1; deterministic file and code provenance are listed in the reproducibility appendix.

3.3.2 Temporal Routing and Block-Causal Semantics

- **Block-causality holds at window granularity and is enforced by construction, not by a mask.** Within one prediction step, attention over the sequence (3.4) is full — and legitimately so: every token in the sequence belongs either to the observed past (context) or to the window currently being generated, whose frames are refined *jointly* as one block under a shared noise level. Across steps, the recursion of Algorithm 3.1 makes information flow strictly causal: frames of window $n+1$ are generated conditioned on (at most) windows $\leq n$ through the buffers, and no token of any future window exists at step n. Viewed over an entire rollout, the effective attention pattern is exactly block-causal with block size $W = 4$ — realized structurally, which eliminates both the mask bookkeeping and any possibility of future-information leakage (there is no future present to leak).
- **Temporal position is encoded by learned absolute frame-index embeddings** (52-entry table, §3.2.1) rather than rotary relative coding. Because every prediction step re-indexes its context to the fixed range $0 \ldots 47$ and its targets to $48 \ldots 51$, the absolute indices function as window-relative coordinates and repeat the same indexing convention at each rollout step. This removes growth of

the position table with absolute time; it is not a claim of strict temporal-translation equivariance of the learned predictor. RoPE-ND and these learned indices are therefore presented as level-appropriate instruments: RoPE-ND for the variable-patch, cross-resolution [A1] system in Chapter 2, and fixed learned indices for the re-indexed window used by the validated hierarchical predictor. No unmeasured RoPE-ND retrofit is attributed to the final model.

3.3.3 Memory and Computational Complexity

Rollout memory is constant in the horizon. The complete inter-step state of Algorithm 3.1 is the buffer pair (3.14):

$$M_{\text{roll}} = H_c \cdot |z^c| + w_f \cdot |z^f| = 48 \cdot 256 + 6 \cdot 1024 = 18{,}432 \text{numbers} = O(1) \text{in the rollout length } T, \quad (3.15)$$

plus the (constant) transient activations of one network evaluation. Generation compute is linear in the horizon with a fixed per-frame constant — $N_{\text{DDIM}}/W = 4$ network evaluations per generated frame — and, crucially, the per-step attention cost never grows with how long the system has been rolling, because the sequence length (3.4) is fixed. This is an inference-state result: sampling runs without a gradient graph, and the retained rollout state (3.15) is constant by design. It should not be conflated with the activation-tape accounting of Chapter 2, which applies when differentiating through a temporal process.

Training memory is single-window and horizon-independent. The training graph spans one network evaluation over 1,472 tokens and $N_{\text{blk}} = 8$ blocks; no gradient crosses window boundaries (§3.1.3). The stored residual-state term is $O(N_{\text{blk}} S d)$, while a naïve attention implementation can additionally materialize $O(N_{\text{blk}} S^2)$ attention-score storage. Memory-efficient or fused attention changes that kernel-dependent term but not the model's $O(N_{\text{blk}} S^2 d)$ attention compute. Accordingly, peak VRAM is treated as an empirical implementation property. The justified invariance is to the number of rollout windows; memory still depends on token count S and hence on the selected package.

Token-budget economics of the hierarchy. The systemic argument for the two-level design is a counting argument. Let H be the number of past frames a model can consult ("effective memory frames"). A flat single-level model pays 64 tokens per remembered frame; the hierarchical model pays 16 tokens per remembered frame beyond its short fine window:

$$S_{\text{ctx}}^{\text{flat}}(H) = 64H, S_{\text{ctx}}^{\text{hier}}(H) = 16H + 64w_f (w_f \text{fixed}), \quad (3.16)$$

an asymptotic 4× token advantage per memory frame, hence (attention being quadratic in sequence length within each of the N_{blk} layers, $O(S^2 d)$) an asymptotic ≈16× advantage in attention cost for the same memory horizon. At the system's operating point the concrete numbers are: hier-long consults 48 frames for 1152 context tokens; a flat model consulting the same 48 frames pays $48 \cdot 64 = 3072$ context tokens — 2.67× the tokens and, at full sequence lengths (1472 vs 3392 tokens), a ≈5.3× ratio in

per-layer attention cost. Conversely, a flat model *constrained to hier-long's token budget* can afford only $1152/64 = 18$ frames of memory — which is precisely the matched-budget control of §3.3.4. The claim is about **hierarchical context packaging whose benefit is mediated by reach**, not an intrinsic superiority of coarse features and not context length treated as a free variable: at equal budget, the flat alternative's horizon (18 frames) falls short of the testbed's loop period (≈48 frames, §3.4.1), while the hierarchical allocation covers it.

Relation to the Chapter 2 activation-memory method. The reported sampler is executed under no-grad, so the predictor does not differentiate through its DDIM recursion and contains no reversible inner-loop component. Chapter 2 shows why this separation is appropriate in the tested regime: for the measured inner-optimization loop, trajectory state was only 0.28% of peak memory, reverse replay saved 0.26% relative to checkpointing, and recomputation roughly doubled wall time. This is a conditional operating-region result, not a theorem that reversibility can never help an inner loop. Reversible temporal replay remains separately relevant if a future training objective differentiates through many rollout windows; it is not used to obtain the Chapter 4 context-package effects.

3.3.4 System Configurations and Matched-Budget Controls

The information design of §3.1.2 turns context allocation into an experimental variable. The model family is parameterized by (H_c, w_f, core). Table 3.1 lists the **core initial configurations** needed to define the model and its principal controls. Later frontier, package-shape, sampler, codec, privileged-access, and external-boundary arms are registered canonically in Chapter 4 and its experimental appendix; they should not be inferred to be absent from the programme because they are not repeated here.

Table 3.1 — Core initial configurations and context-token accounting.

Configuration	Coarse ctx H_c	Fine ctx w_f	Context tokens	Core	Systemic role
hier-long	48	6	$48 \cdot 16 + 6 \cdot 64 = 1152$	diffusion	the developed system: coarse memory ≥ loop period
hier-short	6	6	$6 \cdot 16 + 6 \cdot 64 = 480$	diffusion	memory ablation (hierarchy without the horizon)
flat-budget	0	18	$18 \cdot 64 = 1152$	diffusion	**token-budget-matched flat control** (equal cost, 18-frame horizon)
flat-long	0	48	$48 \cdot 64 = 3072$	diffusion	window-matched flat exhibit (equal horizon, 2.67× budget)
reg-long	48	6	1152	regression	mechanism control (H2), §3.2.5
persistence / AE round-trip	—	—	—	—	error and reconstruction reference points (§3.4.4)

The flat configurations set $H_c = 0$: coarse *context* tokens are absent, while the coarse *target* tokens are retained, so the target interface, output heads, and loss (3.11) remain shared. The intervention is the context package: hier-long uses 48 coarse plus 6 fine frames, whereas flat-budget spends the same 1,152 tokens on 18 contiguous fine frames. The registered prediction is that any advantage of hier-long should concentrate in pair-derived populations whose relevant evidence lies beyond the 18-frame flat window. Chapter 4 tests that prediction; the interpretation remains support for a reach mechanism, not proof that every package difference has been isolated causally.

3.3.5 Generalization to a Family of Hierarchical Configurations

The token-stream design of §3.2.1 generalizes beyond the two-level, stride-1 family of Table 3.1 without any change to the backbone. A configuration is a set of context streams, each parameterized by the triple **(spatial resolution, temporal stride, number of frames)**: the coarse stream may tick at stride $k_t > 1$ (one slot per k_t frames, block-end anchors, W/k_t target slots per prediction window so the slot buffer keeps phase for any k_t dividing W); a full-resolution stream may itself be strided (temporal abstraction without a resolution change); and a third, **top** stream at 2×2 (4 tokens per frame) extends the pyramid to depth 3 at factor 2 per level ($2 \times 2/4 \times 4/8 \times 8$). The top latent is a third tap of the frozen autoencoder trained on the **frozen trunk** (§3.1.1), so the two lower levels remain bit-identical and every measurement of Chapter 4 stays valid across the extension. Two systemic properties distinguish this family from recurrent hierarchies of the CW-VAE class: (i) **depth largely preserves backbone capacity** — all streams share one attention backbone; a third level adds per-level input/output parameters (+0.30 M on the 22.19 M predictor, +1.4%) and the frozen autoencoder tap (1.25 M), measured and disclosed; and (ii) every configuration's context cost is an exact token count, so families are comparable at **matched budget** — the property that licenses the shape comparisons of §4.4 (simplified configurations: `hier-s2-min` = 24 slots at stride 2 + 2 fine = 512 tokens; `strided-flat` = 11 full-resolution slots at stride 4 + 6 fine = 1,088; `hier3` = 48 top + 24 coarse + 9 fine = 1,152).

3.4 Memory-Horizon Testbed and Re-Entry-Stratified Evaluation

A model whose defining property is a *memory horizon* cannot be validated on benchmarks that do not exercise one. On Moving-MNIST-class data nothing ever leaves the frame and returns: every future frame is either fully determined by a short context or permanently unknowable, so there exists no *hard-but-computable-with-memory* regime in which a long-memory mechanism could demonstrate its value. This project's null results on such data (Chapter 1, §1.3; Chapter 4) are consistent with that lack of a memory-relevant re-entry population. Existing memory-oriented benchmarks (Memory Maze and TECO-Minecraft [68, 36], and the recent long-term spatial-memory evaluation protocols for world models [22, 23, 24]) pose genuine long-horizon problems but derive their re-entry events from 3-D egomotion in

rendered environments, where determining *which* pixels of a target frame were knowable from a given context requires geometry processing at best — and their model scales exceed a single-GPU budget. The instrument constructed here is the minimal fully analytic member of this family: hardness labels are computed **exactly** from the recorded control track, and the complete benchmark trains and evaluates on one 16 GB consumer GPU.

3.4.1 Cyclic World with Inertial Panning

Each clip is generated deterministically from a static **world**: a 192×64 texture on a horizontal torus, composed of a smooth background (a sum of four sinusoids with integer wavenumbers, hence seamlessly wrapping; intensities in $[0.15, 0.5]$) and three MNIST digits max-composited at fixed world positions. A 64×64 **viewport** pans horizontally; the observed clip is the sequence of viewport crops, so two thirds of the world (128 of 192 columns, 67%) is off-screen at every instant.

The pan is a **momentum action walk**: at each frame the camera holds with probability p_{hold}, otherwise continues its heading with probability p_{cont} and reverses otherwise (measured on the shipped data: $p_{\text{hold}} \approx 0.10$, $p_{\text{cont}} \approx 0.90$). The executed action $a_t \in \{-1, 0, +1\}$ is recorded, and the viewport advances by $4a_t$ pixels:

$$x_t^{\text{vp}} = (x_{t-1}^{\text{vp}} + 4a_t) mod 192. \tag{3.17}$$

The momentum is the essential design element. A symmetric random walk diffuses too slowly to circumnavigate the torus within a clip, so off-screen content would be either still inside a short context window (determined) or never seen again (unknowable) — reproducing the degenerate Moving-MNIST regime. Directed motion cycles the torus with loop period $\approx 192/4 = 48$ frames: a digit that exits the viewport re-enters roughly 48 frames later at a world position fixed since frame 0. A model with memory spanning the loop period can predict the re-entry from directly retained evidence; a short-context model lacks that evidence and can only exploit the recent view and learned priors. Forty-eight frames is the coarse horizon H_c of the developed system (§3.3.4), while the token-matched flat control's 18-frame horizon falls short of it. The testbed thereby *instantiates* the memory-horizon regime as a controlled experimental variable.

Datasets (fixed, generated once, shared by every experiment): `loopmom_train` — 3{,}000 clips × 100 frames (split by clip into 2{,}700 train / 300 validation); `loopmom_test` — 500 clips × 200 frames, providing a held-out pool of 250 evaluation clips whose 200-frame duration supports the multi-loop rollouts of Algorithm 3.1 (rollout evaluation uses 100 of them per arm). Test latents are standardized with the training statistics (3.3).

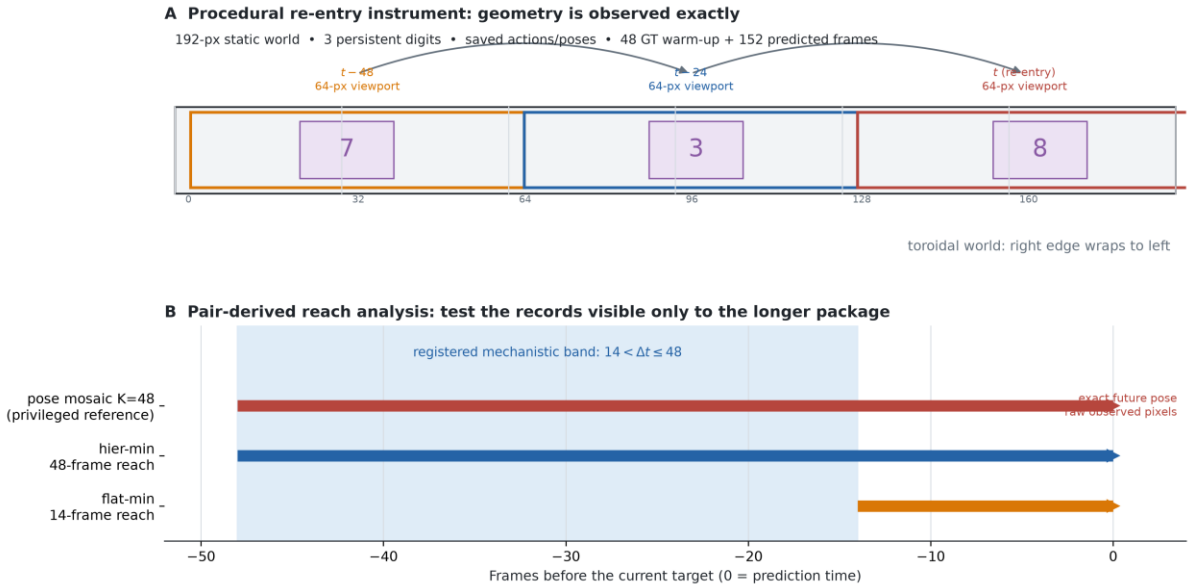


Figure 3.4 — LoopMom geometry and analytic reach band. The 64-pixel viewport traverses a 192-pixel toroidal static world. Saved positions make geometric observability exact; the highlighted 14-to-48-frame band contains evidence available to the long-reach package but outside the compared short flat window. The separate pose-mosaic inset is marked as a privileged reference because it receives exact pose and raw stored pixels. *Source:* author's schematic from the analytic generator geometry; deterministic file and code provenance are listed in the reproducibility appendix.

3.4.2 Exact Re-Entry Difficulty Labels

Because the viewport trajectory (3.17) is a deterministic function of the recorded actions, the set of world columns covered by any context window is computable in closed form — hardness is an analytic label, not a heuristic. For a target frame t and a reference window of the m preceding frames, let $\mathrm{cov}_m(t) \subset \{0, \ldots, 191\}$ be the union of world columns visible in frames $t-m, \ldots, t-1$. If r_t is the viewport's saved world-coordinate offset and $x_t(y,x)$ is the target crop, the evaluator defines the foreground **column** set

$$F_{\mathrm{col}}(t) = \{(r_t + x) mod 192 : max_y x_t(y,x) > 0.5\}.$$

One viewport column therefore counts once irrespective of how many foreground pixels it contains. The **novel-foreground fraction** is

$$\nu_m(t) = \frac{|F_{\mathrm{col}}(t) \setminus \mathrm{cov}_m(t)|}{|F_{\mathrm{col}}(t)|} \in [0,1], \tag{3.18}$$

the fraction of the target's foreground columns that is geometrically unobserved in that context. It is column-weighted rather than pixel-weighted and is an exact observability label for the generator, not information-theoretic necessity: a shared digit prior can still support a statistical guess. The protocol

fixes the reference window at $m = 6$ frames for *all* systems regardless of their actual context length ("novel-fg-at-6"), so every arm is stratified on the same hardness axis, and defines three strata: **easy** ($v_6 = 0$ — the sprite was fully visible in the short window), **mid** ($0 < v_6 \leq 0.1$), and **hard re-entry** ($v_6 > 0.1$ — a substantial part of the sprite is not geometrically visible in the short window). The single-step mechanism study of Chapter 4 uses the analogous *novel-strip* label (the same construction restricted to the newly revealed leading strip of the pan — the only genuinely generative region of a single predicted frame). This stratification is what turns the trajectory-consistency criterion of §1.4.5 into a measurement: the dissertation's headline quantities are error deltas *within the hard re-entry stratum* as a function of rollout horizon.

The pair-specific reach label uses the same foreground columns. Let $N_6(t) = F_{\mathrm{col}}(t) \setminus \mathrm{cov}_6(t)$ and let $v_t(c) = max\{u < t : c \text{ was inside the viewport at } u\}$, with $v_t(c)$ undefined if column c was never visible, and let $A_6(t) = \{c \in N_6(t) : v_t(c) \text{ is defined}\}$. For $|N_6(t)| > 0$, the evaluator records

$$seen(t) = \frac{|A_6(t)|}{|N_6(t)|}.$$

For $|A_6(t)| > 0$, it records

$$\Delta t(t) = median_{c \in A_6(t)}[t - v_t(c)].$$

The explicit empty-set conventions are $seen(t) = 0$ when $N_6(t) = \emptyset$ and $\Delta t(t) = 0$ when $A_6(t) = \emptyset$. A record is **answerable** exactly when $|N_6(t)| > 0$ and $seen(t) \geq 0.5$. Records with no novel columns therefore cannot enter a positive reach-differential band; records with no previously seen novel column are unanswerable and reported separately.

3.4.3 Decoded Frame, Foreground and Object Metrics

Aggregate full-frame pixel metrics are retained as secondary diagnostics but are not accepted as sole or headline evidence. On the archived CW-VAE Moving-MNIST population (100 clips, 36 context frames, 964 open-loop targets), a deterministic all-black prediction scores 0.7681 SSIM and 13.941 dB, while the trained CW-VAE's best-of-5-by-SSIM curve scores 0.5708 and 12.918 dB. The source dataset, archived curve, and evaluator are hash-pinned in the reproducibility manifest; record-level CW-VAE values were not retained, so this is a same-population metric diagnostic without paired inference, not a budget-matched model comparison. A benchmark on which the empty image wins its full-frame metrics is not evidence about dynamics. All metrics below are therefore computed on decoded pixels through the frozen fine decoder and reported with foreground, background, union, full-frame and component-sensitive views.

Table 3.2 — Same-population Moving-MNIST metric sanity diagnostic.

Open-loop horizon	CW-VAE SSIM	All-black SSIM	CW-VAE PSNR, dB	All-black PSNR, dB
+1–48	0.6338	0.7679	13.944	13.943
+49–192	0.5665	0.7679	12.625	13.942
+193–964	0.5677	0.7682	12.909	13.941

- **Foreground MSE (fg-MSE).** Predictions and ground truth are decoded to $[0, 1]$; the error is averaged over pixels where the ground-truth frame exceeds the threshold 0.5. The threshold is testbed-calibrated and verified: the background texture occupies ≈0.18–0.41 while sprite strokes reach ≈0.99, so 0.5 isolates the digits (a conventional 0.1 threshold would classify the entire panning background as foreground).
- **Foreground sharpness (fg-sharp).** Per-image Laplacian energy on that image's foreground mask: $\sum(\nabla^2 \hat{x})^2$ weighted by the mask, normalized by mask area, averaged over images. Deliberately *not* a batch-variance statistic: batch variance rewards inter-sample diversity, whereas per-image Laplacian energy rewards per-frame detail — which is what distinguishes a committed prediction from a mean-hedged blur.
- **Rollout records.** During Algorithm 3.1, every generated frame contributes a record (clip, horizon $h = t - H_w + 1 \in \{1, \ldots, 152\}$, hardness v_6, fg-MSE, fg-sharp, and the persistence reference for the same frame). Analyses bin horizons as 1–8, 9–24, 25–60, 61+ — the 9–24 bin brackets the flat control's 18-frame horizon boundary, and 25–60 brackets the loop period.
- **Decoded-sample review** is a first-class protocol element: every evaluation saves panels of decoded frames (last context | prediction | ground truth) from the same samples that produced the scores. Twice during this research, scalar metrics concealed a qualitative failure (a slow fade to the mean; a blank-output collapse) that one glance at the panels exposed; the protocol therefore mandates the panels alongside the numbers.

For reproducibility, let $p, g \in [0,1]^{H \times W}$ be a decoded prediction and target, $P_\tau = \{p > \tau\}$, $G_\tau = \{g > \tau\}$, $U_\tau = P_\tau \cup G_\tau$, and $e = (p - g)^2$. The frame endpoints are

$$MSE_{\text{full}} = \frac{\sum e}{HW}, MSE_{\text{fg}} = \frac{\sum e \mathbf{1}_{G_\tau}}{|G_\tau|}, MSE_{\text{bg}} = \frac{\sum e \mathbf{1}_{\neg G_\tau}}{|\neg G_\tau|}, MSE_{\text{union}} = \frac{\sum e \mathbf{1}_{U_\tau}}{|U_\tau|}. \tag{3.19}$$

Foreground MSE and foreground sharpness are missing (NaN) when $|G_\tau| = 0$ and are excluded from non-empty-foreground populations; background and union MSE take value 0 when their denominator is empty. Precision is $|P_\tau \cap G_\tau|/|P_\tau|$, recall is $|P_\tau \cap G_\tau|/|G_\tau|$, and both take value 1 when their own denominator is empty; F1 is $2PR/(P + R)$ and takes value 0 when $P + R = 0$.

Table 3.3 — Reproducible frame, component, and persistent-object endpoint definitions.

Endpoint family	Mask / instances	Matching and acceptance	Primary denominator and penalties
LoopMom frame	$\tau = 0.5$; P_τ, G_τ, U_τ as above	none	equation (3.19); explicit empty-mask conventions above
LoopMom components	connected components of $P_{0.5}$ and $G_{0.5}$; discard components smaller than 4 pixels	Hungarian assignment minimizes $1 - IoU$; zero-IoU assignments are discarded	misses $= n_{\mathrm{GT}} - M$; extras $= n_{\mathrm{pred}} - M$; mean IoU and centroid distance use accepted matches only
E6 detections	threshold 0.3; discard components smaller than 30 pixels; intensity-weighted detection centroids and component boxes; every detection receives a classifier label (confidence threshold 0)	generator-provided visible object boxes/labels are ground truth and q_g is the GT-box center; Hungarian cost $c_{gd} = 0.5min(\|q_g - q_d\|_2/D, 1) + 0.5(1 - IoU_{gd})$; accept $c_{gd} \leq 0.65$, where $D = \sqrt{H^2 + W^2}$	coverage $= M/n_{\mathrm{GT}}$; trajectory error $= [\sum_{(g,d)\in\mathcal{M}} \| q_g - q_d \|_2 + (n_{\mathrm{GT}} - M)D]/n_{\mathrm{GT}}$; identity accuracy = correctly labelled accepted matches / visible labelled GT objects, so misses are failures; extras remain explicit but are not inserted into the trajectory or identity denominator

When an E6 frame has no visible GT object, coverage is 1 and trajectory error is 0; identity is undefined if there is no visible labelled GT object. Matched-only trajectory and identity values are retained as diagnostics and never replace the intention-to-score primary endpoints.

3.4.4 Statistical Protocol, References and Boundaries

All system-versus-system comparisons are **paired**: evaluation draws use fixed seeds so every arm sees identical (clip, target) pairs; stochastic samplers are re-seeded per batch with common random numbers; and rollout records pair exactly across arms by (clip, horizon) thanks to the universal 48-frame warm-up (§3.3.1). Headline deltas are reported with 95% confidence intervals from a paired **clip-cluster** bootstrap (10{,}000 resamples): clips are the resampling units and all horizons belonging to a selected clip remain inside the replicate. This preserves within-rollout dependence rather than treating frames as independent observations [120, 121, 122, 123]. The untouched frontier and protected robustness families use a studentized max-statistic clip-cluster procedure for simultaneous coverage across their registered contrasts. Intervals are computed within each stated hardness×horizon population; single-step evaluation pools are sized at ≈768 samples so the hard stratum retains power, and rollout evaluation covers 100 clips × 152 generated frames = 15{,}200 records per arm. Clip-cluster intervals condition on each trained model; training seeds are a separate uncertainty level and are reported individually or summarized with seeds as units. Where a best-of-N statistic appears it is an oracle

coverage diagnostic (selection by pixel-space fg-MSE against ground truth) and is always reported alongside the mean over N; headline tables use best-of-1.

Every table is bracketed by references measured under the identical pipeline: the **persistence reference** (copy the last context frame's fine latent, decode) scores fg-MSE 0.2367 / fg-sharp 0.0515 at the 4-frame offset — any model below that error has learned at least the action-conditioned warp; and the **AE round-trip sharpness reference**: raw ground-truth frames measure fg-sharp 0.4785, but their autoencoder round-trip measures 0.2412, so all model sharpness is read against ≈0.24 (roughly half the raw sharpness is spent in the autoencoder before any prediction model acts). This is an empirical reconstruction reference, not a mathematical upper bound. A decoded output below ≈0.08 contains no digit structure at all (the empirically calibrated collapse threshold used throughout the mechanism study).

Table 3.4 — Testbed and evaluation protocol summary.

Component	Value	Notes
World / viewport	192×64 torus / 64×64 crop	128 columns (67%) off-screen at any time
Content	background texture + 3 MNIST digits	fixed world positions; max-composited
Pan process	momentum walk, 4 px/frame	$p_{\text{hold}} \approx 0.10$, $p_{\text{cont}} \approx 0.90$ (measured); actions $\{-1,0,+1\}$ recorded
Loop period	≈ 48 frames	$192/4$; sets the memory horizon; $= H_c$ of hier-long
Train / test	3,000×100 / 500×200 frames	clip-disjoint; test standardized with train statistics
Latent interface	frozen 2-level conv-AE, 1.85 M	coarse 16 ch @ 4×4, fine 16 ch @ 8×8, per-level decodable; fine val recon MSE 0.0020
Standardization	per-channel z-score, per level	training-set statistics only; eq. (3.3)
Error metric	fg-MSE, threshold 0.5	decoded pixels; background ≈0.18–0.41, sprite ≈0.99
Sharpness metric	per-image masked Laplacian energy	GT 0.4785; AE round-trip reference 0.2412; collapse < ≈0.08
Hardness axis	v_6 — novel-fg vs 6-frame window, exact	easy $= 0$; mid $(0,0.1]$; hard > 0.1; eq. (3.18)
Rollout	48-frame GT warm-up; 38 steps × 4 frames	152 generated frames/clip; 100 clips; horizons binned 1–8 / 9–24 / 25–60 / 61+

Component	Value	Notes
Statistics	paired clip-cluster 95% CI; CRN for same target shapes	10,000 resamples; simultaneous max-statistic families where registered; ≈768-sample single-step pools; 15,200 rollout records/arm; training seeds reported separately
Reference points	persistence fg-MSE 0.2367 / fg-sharp 0.0515	k = 4 offset; identical pipeline for every arm

Scope and limitations of the instrument are stated plainly, as required of a measurement deliverable: motion is one-dimensional and piecewise-deterministic given the action, so the generative burden is concentrated in the re-entry events by design; world content is static in world coordinates, so the testbed does not probe memory of *dynamic* off-screen state; all conclusions are at 64×64 grayscale and single-digit complexity; and the frozen autoencoder's round-trip sharpness reference contextualizes every downstream comparison without constituting an upper bound. The analytic hardness labels that justify the design would not transfer unchanged to 3-D egomotion benchmarks, which are positioned as the natural next rung (Chapter 4 and General Conclusions).

3.5 Chapter Conclusions

1. In accordance with **Task 5** of the dissertation research, a mathematical model of multi-stream video-data generation in a compact continuous hierarchical latent state space has been developed. It supports streams with different temporal rates and spatial resolutions over one shared attention backbone. Its measured spatial implementation decomposes the state (3.1) into a coarse (macro) level — 16 channels at 4×4, independently decodable, standardized per channel — and a fine (micro) level — 16 channels at 8×8 — over a frozen two-level autoencoder. In that implementation the coarse stream economically packages long-range history: it is the stream whose context extends over the full 48-frame memory horizon, at a cost of 16 tokens per remembered frame against the fine level's 64 (eq. 3.16, a 4× per-frame and asymptotically ≈16× attention-cost advantage).
2. The inter-level transfer of context signals has been formalized as joint self-attention over a single token sequence of both levels (eqs. 3.4–3.5). Both levels are denoised jointly under a shared noise level, providing a learned cross-level conditioning path and an inductive bias toward hierarchical consistency; consistency is evaluated rather than guaranteed. Gradient detachment is applied at the frozen representation boundary and between autoregressive windows, while within-window generation is joint rather than macro-first.
3. The per-frame generation core has been formalized as window diffusion in the standardized latent space: v-parameterized (3.10) denoising of 4-frame two-level windows under a cosine schedule (3.9) with per-target-frame action conditioning, trained on single windows (3.11) and sampled by 16-step deterministic DDIM (3.12)–(3.13) at a fixed cost of 4 network evaluations per generated

frame. The window length equals the recursion advance, which makes the training and rollout **layout and temporal indexing** identical by construction. It does not make their values identically distributed: training uses clean contexts, while rollout contains self-generated values and therefore retains exposure-bias risk. A capacity-matched regression variant on the identical backbone (§3.2.5) completes the model family for the mechanism claims whose evidence is presented in Chapter 4.

4. The autoregressive rollout algorithm with ring-buffer memory (Algorithm 3.1) has been developed and its resource profile derived: the inter-step state is constant at $48 \cdot 256 + 6 \cdot 1024 = 18{,}432$ numbers (3.15) independently of the rollout horizon, per-step cost is fixed by the constant 1472-token sequence, and block-causality holds at window granularity by construction rather than by masking (§3.3.2). The selected diffusion core requires no gradient through its sampler. Reversibility remains a separately measured contribution on the temporal-rollout differentiation axis and a candidate, alongside checkpointing, for future rollout-through-time training; it is not used to produce the Chapter 4 context-package gains.
5. In accordance with **Task 6**, the measurement instrument of the intelligent information technology has been formalized: the momentum looping memory-horizon testbed (3.17) with exactly computable re-entry hardness labels (3.18), foreground-masked per-image metrics with verified thresholds and AE round-trip references, mandatory decoded-sample review, and a paired clip-cluster bootstrap protocol with common random numbers and a universal warm-up that pairs every record across systems. The instrument operationalizes the trajectory-consistency criterion of Chapter 1 into an analytic, statistically disciplined measurement procedure, and its scope limits are stated as part of the deliverable.
6. The core initial experimental configurations are fixed within the model chapter (Table 3.1): the developed system (hier-long), the memory ablation (hier-short), the token-budget-matched flat control (flat-budget, 1152 tokens = 18-frame horizon), the window-matched flat exhibit (flat-long, 2.67× budget), and the regression control (reg-long) — with the decisive comparison, hier-long versus flat-budget at equal token cost, constructed so that the hierarchy's memory horizon (48 frames ≥ loop period) and the flat horizon (18 frames < loop period) straddle the testbed's re-entry structure. The experimental verification of the registered hypotheses on this design—including the fallback conclusions specified in advance—constitutes §§4.2–4.4 of Chapter 4. The complete later arm and comparison registry is presented with the results rather than being implied by this core table.

The chapter therefore closes the methods-side link between the dissertation strands. It takes the shared allocation question from Chapter 2 and applies it to retained context/state, while the Chapter 1 trajectory criterion becomes the LoopMom observability and paired evaluation protocol. Chapter 4 supplies the empirical decision: which mechanism and context package pays in each tested operating region. Those results do not depend on RoPE-ND or reversible rollout training, so evidentiary separation is preserved while the systems narrative remains continuous.

The context-packaging, model, and evaluation results of this chapter form the methods section of [A4]. Its final numbered bibliographic position and any related conference theses are publication-administration fields, not scientific dependencies of the chapter.

Chapter 4 — Experimental Evaluation, Operating Regions, and Practical Application

This chapter evaluates the developed methods by scientific question rather than by experiment chronology. A curated configuration-and-evidence appendix reports the complete observed arm grid, seed coverage, comparison licences, robustness cells, and provenance receipts. Historical gate decisions and exploratory branches remain research records rather than part of the scientific argument. The main chapter answers:

1. Which generation mechanism is appropriate for the controlled predictor, and under which inference regime?
2. Does hierarchical context retrieve memory-relevant content beyond a token-matched flat window?
3. Where is the tested reach–fidelity frontier, and what context-state efficiency does it imply?
4. Which context-package shape is preferred?
5. Which directions survive training seeds, sampler allocation, and codec changes?
6. Which proposed effects fail to replicate?
7. What do explicit access and persistent-object evaluation reveal about the mechanism's limits?

The chapter reports frozen evidence only. Moving-MNIST-CIFAR, KTH, E5b, E9, and the B1 fixed-target control are not executed results. E9 is terminally skipped because it provides no incremental utility after the protected evidence programme; B1 retains whole-configuration wording, so the unexecuted control is not required for the present claims.

4.1 Evaluation Design and Evidence Levels

4.1.1 Testbeds and roles

The experimental programme separates mechanism identification, confirmation, robustness, and external-boundary evidence.

LoopMom is the primary mechanistic instrument. A 64×64 viewport moves over a 192×64 toroidal world containing background texture and digit sprites. At any instant, two thirds of the world is outside the viewport. Recorded actions and viewport positions identify when each world region was last visible; at the main operating point, relevant content re-enters after approximately 48 frames. This geometry provides exact *geometric observability*: it tells whether the information required for a re-entry was previously visible within a package's reach. It does not prove information-theoretic necessity because common digit priors can make unseen content statistically predictable.

Moving-MNIST 10-to-10 is a short, no-re-entry competence boundary using the canonical OpenSTL protocol [1] [124]. It asks whether the general predictor functions on a standard dataset, not whether hierarchical memory pays.

Persistent-object long Moving-MNIST (E6) uses a 48-frame warm-up followed by 300 self-fed frames. The generator saves persistent object and source-glyph identities, boxes, and trajectories. The evaluator uses one-to-one Hungarian assignment [125], explicit misses and extras, a fixed ground-truth denominator for identity accuracy, and object coverage. E6 is an external synthetic boundary, not a replication of LoopMom's geometry.

TaxiBJ is a real spatio-temporal forecasting competence bridge under the OpenSTL 4-to-4 protocol [126] [1]. It does not contain the off-screen re-entry mechanism required by the article's central claim and is therefore not treated as memory confirmation.

4.1.2 Evidence hierarchy

Four evidence levels are kept distinct:

1. **Development evidence** uses the original evaluation pool that informed theory and arm selection.
2. **Untouched confirmation** evaluates frozen checkpoints and registered populations once on a newly generated, hash-pinned holdout rejected by training and monitoring loaders.
3. **Robustness evidence** changes sampler allocation or the entire latent codec under separately purpose-locked data.
4. **External-boundary evidence** changes the task and object semantics and is interpreted as a scope test rather than a replication.

The source of truth is the immutable local NPZ/JSON evidence, not dashboard summaries. Protected data require purpose-specific access records. Each accepted result is linked to a content-addressed run specification, dataset hash, checkpoint provenance, source revision, and completion validator.

Table 4.1 — Experimental study map. "Seeds" means training seeds unless sampler or codec seeds are named explicitly. A comparison license (written "licence" in the tables) states what kind of inference the design permits.

Study	Scientific question	Intervention and held-fixed quantities	Co-change / comparison licence	Seeds	Population and evidence level	Inferential family and terminal reading
Mechanism study	Which prediction mechanism is useful?	regression/diffusion head and objective changed while context layout, latent interface and	objective and inference differ; best-of-8 total network work is not equal; EBM is not a	one regression, one diffusion, two EBM	LoopMom development	best-of-8 coverage with declared per-candidate and total work; NFE

Study	Scientific question	Intervention and held-fixed quantities	Co-change / comparison licence	Seeds	Population and evidence level	Inferential family and terminal reading
		transformer capacity were closely matched; EBM tested separately in the official-code adaptation	third matched-capacity cell / **MATCHED_CAPACITY** for regression–diffusion, **DEVELOPMENT_DIAGNOSTIC** for EBM	recipes		sensitivity; separate EBM capability verdict; regime-dependent selection
E2	Where does hierarchy pay at fixed context budget?	package geometry changed; codec, backbone, evaluation clips and pair budgets fixed	reach and retained spatial fidelity change together / **MATCHED** except the labelled 480-vs-512 near-match and B1	pair-specific, 0–2	protected LoopMom untouched holdout	one simultaneous frontier family; hierarchy at 896/1,152, unresolved at 1,792, flat at 2,432/3,072
B1 within E2	Does the complete stride-2 configuration beat a short flat configuration?	512 context tokens matched	target stride, target tokens, auxiliary loss and optimization load co-change / **WHOLE_CONFIGURATION**	0–1	protected LoopMom untouched holdout	registered reach band; configuration confirmed, pure stride claim prohibited
E4b	Does package preference survive head and training-seed changes?	temporal and spatial 48-frame packages crossed with diffusion/regression; codec and backbone fixed	1,088-vs-1,152 context tokens / **DEVELOPMENT_FACTORIAL, NEAR_MATCHED**	0–4	adaptively used LoopMom development pool	per-seed clip intervals plus across-seed summaries; stable diffusion direction, heterogeneous regression/interaction
E5a	Does a late self-fed inversion replicate?	frozen long-loop pair repeated at two new seeds	seed 0 generated the hypothesis / **REGISTERED_REPLICATION**	0–2	long-loop development/replication set	early hierarchy benefit repeats; late negative direction **NOT_REPLICATED**
E7c	Are central directions sensitive to sampler randomness or NFE?	frozen seed-0 predictors; NFE and sampler seed varied	checkpoint-only / **ROBUSTNESS_ONLY**	training seed 0; sampler seeds 0–2	purpose-locked LoopMom robustness set	one 20-effect family; directionally robust, upper inversion less precise

Study	Scientific question	Intervention and held-fixed quantities	Co-change / comparison licence	Seeds	Population and evidence level	Inferential family and terminal reading
E7a	Do directions survive a newly trained codec?	full codec, normalization and all seven predictors retrained	whole latent interface changes / **ROBUSTNESS_ONLY**	predictor seed 0; one alternate codec	purpose-locked LoopMom robustness set	one eight-effect family; codec-directionally robust
E8a	How much error remains when addressing is explicit?	exact future pose and lossless warm-up pixels supplied	not token or information matched / **PRIVILEGED_REFERENCE**	n/a	purpose-locked LoopMom reference	one six-effect family; large explicit-access advantage
E6	Does the support–identity boundary appear on persistent objects?	matched 1,152-token flat and hierarchical packages	task and object semantics changed / **EXTERNAL_BOUNDARY**	0–2	protected long Moving-MNIST	one 15-effect family; support/continuity favor hierarchy, identity favors flat
Competence bridges	Does the general stack function outside the central instrument?	dataset/protocol changed	no re-entry mechanism and limited replication / **DESCRIPTIVE_BOUNDARY**	one reported model per arm	Moving-MNIST 10-to-10 and TaxiBJ	competence only; no hierarchy-generalization claim

4.1.3 Endpoints and statistical protocol

Sparse-video evaluation requires more than aggregate full-frame error. Every accepted evaluation retains full-frame MSE, non-empty ground-truth-foreground MSE, background MSE, union-mask MSE, foreground precision/recall/F1, component counts, misses, extras, overlap, and coverage. Persistent-object studies additionally retain trajectory error and identity accuracy. SSIM, PSNR, LPIPS, FID, and FVD remain useful conventional metrics [127, 128, 94, 129], but no one aggregate score is allowed to substitute for re-entry, hallucination, support, identity, and coverage endpoints.

For a registered pair, record-level differences are paired by clip and horizon. The sampling unit is the clip: a bootstrap replicate samples clips with replacement and retains all rollout frames inside each selected clip. This preserves within-rollout dependence. Clip-cluster intervals condition on the trained model, while training seeds are a separate uncertainty level. Registered families use a studentized

maximum statistic across all contrasts in each bootstrap replicate, producing simultaneous intervals rather than interpreting many marginal intervals independently [120, 121, 122, 123].

Effect signs are harmonized so that positive values favor the registered candidate: comparator minus candidate for lower-is-better errors, and candidate minus comparator for higher-is-better accuracy or coverage. A null interval is unresolved, not evidence of equivalence. Equivalence would require a justified smallest effect of interest, adequate measurement reliability, and a confidence interval wholly inside that margin.

4.1.4 Computational environment and budget vocabulary

The main experiments use the recorded Python/PyTorch environments and NVIDIA GPU configurations stored with their run specifications. CPU-only gates validate dataset integrity, package interfaces, experiment authorization, metric semantics, and deterministic evidence generation. GPU-hour accounting includes training, evaluation, pilots, failures, and retries.

“Matched budget” always names the matched resource:

- context-token matched;
- target-interface matched;
- total-sequence-token matched;
- parameter matched;
- training-example matched;
- optimizer-update matched; or
- per-candidate NFE declared, with total candidate-generation work reported.

The B16×30k and B8×60k regimes process approximately the same number of examples but differ in updates, gradient noise, grouping, and effective EMA horizon. They are optimizer-regime comparisons, not “twice the data.”

Table 4.2 — Complete observed LoopMom package/interface registry. Fine tokens are $8 \times 8 = 64$ per frame and coarse tokens are $4 \times 4 = 16$ per frame. “Observed” means that a completed model/evaluation cell exists; it does not make every row mutually comparable. The comparison licence in Table 4.1 and Table 4.8 controls interpretation.

Arm	Context geometry	Reach	Context	Target	Total	Head(s) and executed training seeds	Training regime	Scientific role
`hier-short`	6 coarse + 6 fine, dense	6	480	320	800	diffusion 0–1	B16×30k	lower near-match; span below

Arm	Context geometry	Reach	Context	Target	Total	Head(s) and executed training seeds	Training regime	Scientific role
								loop
`flat-short` / `flat-short-reg`	8 contiguous fine	8	512	320	832	diffusion 0–1; regression 0	B16×30k	lower comparator; B1 baseline
`hier-s2-min` / `hier-s2-min-reg`	24 stride-2 coarse + 2 recent fine	48	512	288	800	diffusion 0–1; regression 0	B16×30k	B1 whole configuration
`spat18` / `spat18-reg`	18 dense coarse + 6 recent fine	18	672	320	992	diffusion 0; regression 0	B16×30k	fixed-span resolution diagnostic
`flat-min`	14 contiguous fine	14	896	320	1,216	diffusion 0–1	B16×30k	896-token reach comparator
`hier-min`	48 dense coarse + 2 recent fine	48	896	320	1,216	diffusion 0–1	B16×30k	896-token reach candidate
`strided-flat` / `strided-flat-reg`	11 stride-4 fine anchors + 6 recent fine	48	1,088	320	1,408	diffusion 0–4; regression 0–4	B16×30k	temporal-package factorial arm
`flat-budget` / `reg-flat`	18 contiguous fine	18	1,152	320	1,472	diffusion 0–2; regression 0–1	B16×30k; diffusion seed 0 also B8×60k	1,152-token comparator
`hier-long` / `reg-long`	48 dense coarse +	48	1,152	320	1,472	diffusion 0–4; regression 0–4	B16×30k; diffusion seed 0 also B8×60k	1,152-token candid

Arm	Context geometry	Reach	Context	Target	Total	Head(s) and executed training seeds	Training regime	Scientific role
	6 recent fine							ate and spatial package arm
hier3	48 top + 24 coarse + 9 fine	48	1,152	336	1,488	diffusion 0	B16×30k	depth-plus-objective/allocation diagnostic
flat-c1	28 contiguous fine	28	1,792	320	2,112	diffusion 0	B16×30k	intermediate frontier comparator
hier-c1	48 dense coarse + 16 recent fine	48	1,792	320	2,112	diffusion 0	B16×30k	intermediate frontier candidate
flat-c2	38 contiguous fine	38	2,432	320	2,752	diffusion 0	B16×30k and B8×60k	upper frontier comparator
hier-c2	48 dense coarse + 26 recent fine	48	2,432	320	2,752	diffusion 0	B16×30k and B8×60k	upper frontier candidate
flat-long	48 contiguous fine	48	3,072	320	3,392	diffusion 0–1	B8×60k	equal-reach dense comparator
hier-rich	48 dense coarse + 36	48	3,072	320	3,392	diffusion 0–1	B8×60k	equal-budget hierarchy

Arm	Context geometry	Reach	Context	Target	Total	Head(s) and executed training seeds	Training regime	Scientific role
	recent fine							

The registry deliberately contains no “pending” cells. The proposed `flat-320`, `hier-s4-min`, and `hier3-reg` cells were **NOT_EXECUTED / OUT_OF_SCOPE** when the frozen programme closed; they are not missing results and support no claim. The curated appendix reports the observed outcome grid, per-seed factorial cells, robustness families, measured cost fields, and artifact bindings.

4.2 Selection of the Generation Mechanism

The model chapter uses v-parameterized latent diffusion, but the experiment does not assume that diffusion wins every evaluation regime. Regression and diffusion share the same conditioning structure and closely matched transformer capacity. Energy-based descent is assessed in a separate 14.66 M-parameter official-code adaptation; it contributes a capability diagnosis, not a third cell in the matched-capacity regression–diffusion comparison.

Table 4.3 — Mechanism-selection contract. The table separates the question answered by each head from its final role; it does not collapse incompatible inference regimes into one ranking.

Mechanism	Training object	Additional inference input	Inference rule	Single-step result	Best-of-1 rollout result	Final role
Regression	clean target latent	none beyond context/actions	one direct pass; MC dropout only for coverage diagnostics	weaker best-of-8 coverage	stronger deterministic self-fed rollout	deterministic rollout control
Diffusion	velocity of a noisy target latent	noisy candidate and diffusion time	DDIM at a declared NFE	stronger stochastic/oracle coverage	weaker than regression in tested deterministic rollout	primary head for the fixed-budget frontier
Energy-based model	scalar energy of context–candidate pairs	initialized target candidate	gradient descent in candidate space	ordering/descent failure modes at reachable scale	no rollout grid after the gate failed	characterized negative; no universal impossibility claim

4.2.1 Shared single-step mechanism study

The regression and diffusion predictors use width 256, six transformer blocks, eight heads, and a shared context layout; their parameter counts are 7.27 M and 7.53 M. Context contains six frames at both latent levels, and the target lies four actions after the last context frame. Per-level latent standardization is essential: without it, unit-scale diffusion noise overwhelms raw latent scales and reverses the observed ranking. Best-of-N is an oracle coverage diagnostic selected by decoded foreground MSE against the ground truth and is always separated from mean-over-N and best-of-1.

The inference accounting is deliberately explicit. One regression candidate requires one MC-dropout network evaluation; one diffusion candidate requires the declared number of DDIM network function evaluations (NFE). Therefore best-of-8 uses 8 regression evaluations but 32, 64, or 128 diffusion evaluations at 4, 8, or 16 NFE per candidate. The study is matched in backbone capacity and interface, **not** in total inference work. The NFE sweep is a diffusion inference-allocation sensitivity analysis against a fixed-cost regression coverage diagnostic.

Table 4.4 — Matched-capacity single-step best-of-8 mechanism comparison. For the two learned heads, score columns except "mean over 8" use the per-record oracle-selected best candidate; diffusion uses 16 NFE per candidate (128 network evaluations per record), whereas regression uses eight evaluations per record. Persistence is a one-output reference.

Head	Best-of-8 fg-MSE, all	Best-of-8 easy	Best-of-8 hard novel strip	Mean over 8 candidates	Best-of-8 fg-sharpness
Regression with MC dropout	0.0664	0.0232	0.1808	0.0714	0.1591
Diffusion, v-prediction + DDIM	**0.0512**	**0.0120**	**0.1549**	**0.0640**	**0.1886**
Persistence reference	0.2367	—	—	—	0.0515

The frozen sensitivity receipt uses a smaller two-batch evaluation pool than Table 4.4 and is therefore reported separately rather than spliced into its columns:

Per-candidate NFE	Regression best-of-8 fg-MSE	Diffusion best-of-8 fg-MSE	Total regression / diffusion evaluations per record
4	0.0680	0.0546	8 / 32
8	0.0680	0.0514	8 / 64
16	0.0680	0.0503	8 / 128

Diffusion wins every column in Table 4.4's single-step best-of-8 coverage regime and remains lower in foreground MSE at each tested diffusion allocation in the sensitivity receipt. This does not show equal-work superiority because total candidate-generation work differs. The separation is largest on the genuinely generative hard subset. The regressor's mean-over-8 and best-of-8 values are close, while diffusion gains more from multiple samples, consistent with the established distinction between mean-seeking regression and stochastic coverage [130, 131, 132].

4.2.2 Best-of-1 rollout reverses the head ranking

During deterministic best-of-1 self-fed rollout, regression performs better: `reg-long` reaches foreground MSE 0.1682 versus 0.1848 for `hier-long`, with paired interval $[+0.0110, +0.0227]$ for diffusion-minus-regression and nearly equal sharpness (0.0741 versus 0.0729). At the matched flat context, regression reaches 0.2015 versus 0.2038 for diffusion.

The two results answer different questions. Diffusion wins an oracle-coverage regime in which multiple samples are compared to the ground truth. Regression wins the deterministic best-of-1 rollout in which every prediction is fed back. The defensible conclusion is regime dependence, not a universal best head.

4.2.3 Energy-based descent is a characterized negative

The energy-based study uses the official Energy-Based Transformer implementation and two reported training recipes [88]. It separates two capabilities: whether the trained energy orders true targets below mismatched targets, and whether candidate descent from the prescribed initialization reaches structured outputs.

One recipe produces a persistently misordered landscape. The second repairs the ordering but descent still fails to reach structured video targets at the scale feasible in this programme. This is a two-sided characterized negative, not a proof that energy-based video generation is impossible at larger scale. It justifies selecting diffusion for the coverage-oriented single-step mechanism while retaining regression as a best-of-1 control. Detailed energy landscapes, scale gaps, and descent trajectories remain in the curated evidence appendix.

The receipt-level result is: S2 places the batch mean below the target on all 21 recorded probes (converged loss approximately 0.597); S1 places the target lowest on 15 consecutive probes from steps 6,000–20,000, with a target-below-mean gap of +0.22 to +3.09 and final loss 0.3614. Nevertheless, S1 cold-descent foreground sharpness never exceeds 0.0345, and its paper-style best-of-4 probes remain in 0.0102–0.0154, below the predeclared approximately-0.08 structured-output threshold. These receipts come from hash-listed legacy logs rather than the content-addressed E2–E8 result schema; the appendix states that provenance distinction explicitly.

4.3 Untouched Confirmation of Reach

The original LoopMom pool informed qualitative monitoring and configuration selection. The central reach claims were therefore tested once on the newly generated hash-pinned holdout `loopmom-confirmation_holdout-20260712-e033abee6e04`. Before access, the protocol froze checkpoint evaluations, pair definitions, reach bands, endpoints, table layouts, and the simultaneous frontier family.

For `hier-min` versus `flat-min`, the registered population contains non-empty answerable records with

$$14 < \Delta t \leq 48,$$

so the relevant past lies outside the 14-frame flat reach and inside the 48-frame hierarchical reach. The effects are:

Training seed	Reach-band effect	95% CI
0	+0.0980	[0.0788, 0.1179]
1	+0.0914	[0.0736, 0.1098]

Whole-population effects are +0.0474 $[0.0354, 0.0595]$ and +0.0436 $[0.0326, 0.0549]$. Union-mask, full-frame, recall/F1, missed-component, and coverage endpoints support the same direction. The concentration of the larger effects inside the pair-derived band supports reach as the mechanism.

For B1 versus `flat-short`, the registered $8 < \Delta t \leq 48$ effects are +0.0692 $[0.0543, 0.0845]$ and +0.0743 $[0.0588, 0.0899]$. B1 changes context stride, target stride, target slots, auxiliary loss, sequence length, and optimization difficulty together. It is therefore a confirmed *whole-configuration* effect, not a pure causal stride estimate.

Geometric observability is exact for the generator but not information-theoretic necessity. A stronger necessity experiment would require paired worlds identical over the short visible context but different in hidden content that determines re-entry.

4.4 Tested Reach–Fidelity Frontier and Memory Efficiency

The untouched E2 simultaneous family is the principal frontier evidence:

Table 4.5 — Registered tested frontier with arm identities and simultaneous intervals. Effects are flat loss minus hierarchical loss, so positive values favor hierarchy. The first two rows are a declared 480-versus-512 near-match and are not used to define the exact-budget confirmed bracket.

Context budget	Flat arm / reach	Hierarchical arm / reach	Seed and regime	Effect	Simultaneous 95% CI	Decision
480 vs 512	flat-short / 8	hier-short / 6	seed 0, B16×30k	−0.0038	[−0.0081,+0.0005]	unresolved near-match
480 vs 512	flat-short / 8	hier-short / 6	seed 1, B16×30k	−0.0060	[−0.0105,−0.0015]	flat favored; near-match
896	flat-min / 14	hier-min / 48	seed 0, B16×30k	+0.0474	[+0.0305,+0.0642]	hierarchy confirmed
896	flat-min / 14	hier-min / 48	seed 1, B16×30k	+0.0436	[+0.0280,+0.0592]	hierarchy confirmed
1,152	flat-budget / 18	hier-long / 48	seed 0, B16×30k	+0.0195	[+0.0070,+0.0320]	hierarchy confirmed
1,152	flat-budget / 18	hier-long / 48	seed 1, B16×30k	+0.0389	[+0.0228,+0.0549]	hierarchy confirmed
1,152	flat-budget / 18	hier-long / 48	seed 2, B16×30k	+0.0307	[+0.0159,+0.0455]	hierarchy confirmed
1,792	flat-c1 / 28	hier-c1 / 48	seed 0, B16×30k	+0.0084	[−0.0013,+0.0181]	unresolved
2,432	flat-c2 / 38	hier-c2 / 48	seed 0, B16×30k	−0.0150	[−0.0260,−0.0039]	flat confirmed
2,432	flat-c2 / 38	hier-c2 / 48	seed 0, B8×60k	−0.0122	[−0.0213,−0.0032]	flat confirmed; separate optimizer regime
3,072	flat-long / 48	hier-rich / 48	seed 0, B8×60k	−0.0129	[−0.0217,−0.0041]	flat confirmed
3,072	flat-long / 48	hier-rich / 48	seed 1, B8×60k	−0.0134	[−0.0215,−0.0053]	flat confirmed

The largest tested family-wise-confirmed hierarchy point is 1,152; the smallest tested confirmed flat point is 2,432. No monotonicity, unique crossing, interpolation, or asymptotic law is inferred between them.

At the frozen latent resolution, one fine frame costs $8 \times 8 = 64$ tokens and one coarse frame costs $4 \times 4 = 16$. The 48-frame arithmetic is:

Table 4.6 — Context-state cost at equal nominal 48-frame addressable reach. Each frozen-codec spatial token contains 16 latent coefficients. The rollout transformer width is $d = 384$.

Package	Context-token calculation	Tokens	Latent payload, fp32	Latent payload, fp16/bf16	Materialized width-384 embeddings, bf16	Relative cost
48 dense fine frames	48×64	3,072	192 KiB	96 KiB	2.250 MiB	1.00×
48 coarse + 6 fine	$48 \times 16 + 6 \times 64$	1,152	72 KiB	36 KiB	0.844 MiB	2.67× fewer
48 coarse + 2 fine	$48 \times 16 + 2 \times 64$	896	56 KiB	28 KiB	0.656 MiB	3.43× fewer

The result is **same nominal reach with fewer context tokens**. It is not a claim of equal information, equal error, equal total tokens, equal compute, or equal wall time. Target tokens and total sequence tokens are reported separately. The latent-payload columns are exact contiguous array payloads; the embedding column is an implementation-level materialization whose fp32 size is twice the value shown. These figures exclude target tokens, attention/MLP intermediates, allocator and container overhead, parameters, optimizer state and training activations. All representations therefore preserve the same 2.67× and 3.43× context-state ratios without implying equal end-to-end VRAM savings.

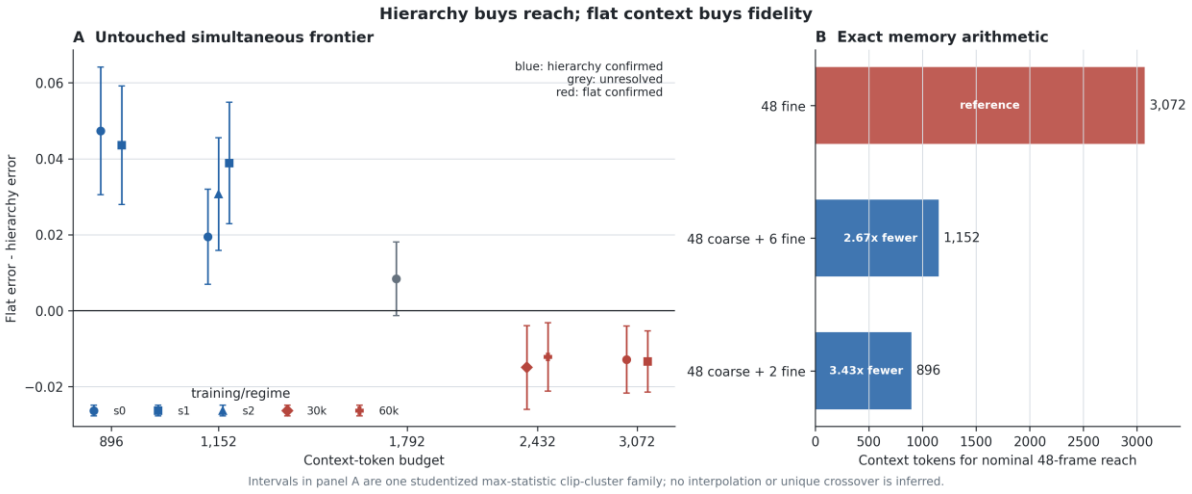


Figure 4.1 — Untouched tested frontier and exact context-token arithmetic. Positive effects favor hierarchy. Intervals belong to one simultaneous family; no line is drawn through the tested points and 1,792 is shown as unresolved. The values are bound to the frozen E2 result artifact in the curated evidence appendix.

The frontier supports the dissertation's central state-memory interpretation. Hierarchy pays when compression buys access to otherwise unreachable evidence. Once the flat package can afford the relevant span, discarded fine information becomes an abstraction cost and flat fidelity recovers.

4.5 Context-Package Shape

Temporal subsampling and spatial coarsening both buy reach, but they preserve different information. The near-matched comparison uses a 1,088-token temporally sparse full-resolution package and a 1,152-token spatial hierarchy. The 64-token deficit favors the temporal package, so the pair is near-matched rather than exactly matched.

The complete five-seed head-by-package factorial is:

Table 4.7 — Package form by prediction head and training seed. Positive package effects favor the temporally sparse full-resolution package. Negative interactions mean that changing from diffusion to regression shifts the contrast toward spatial coarsening.

Seed	Diffusion temporal advantage	Regression temporal advantage	Head × package interaction
0	+0.0197 [+0.0143,+0.0252]	+0.0107 [+0.0062,+0.0158]	−0.0089 [−0.0151,−0.0025]
1	+0.0046 [+0.0007,+0.0084]	−0.0104 [−0.0146,−0.0062]	−0.0150 [−0.0199,−0.0104]
2	+0.0111 [+0.0070,+0.0151]	−0.0208 [−0.0270,−0.0150]	−0.0319 [−0.0401,−0.0245]
3	+0.0075 [+0.0037,+0.0114]	+0.0248 [+0.0181,+0.0323]	+0.0173 [+0.0106,+0.0245]
4	+0.0060 [+0.0027,+0.0092]	−0.0166 [−0.0229,−0.0108]	−0.0226 [−0.0297,−0.0160]

The across-seed mean is +0.0098, SD 0.0060, with t95 $[+0.0023, +0.0173]$. Thus temporal full-resolution anchors are stable at the tested static-world diffusion operating point.

Regression does not reproduce a stable package direction: effects are +0.0107, −0.0104, −0.0208, +0.0248, and −0.0166. The head-by-package interaction also changes sign. The correct conclusion is therefore:

- temporal packaging is stable across the five tested diffusion seeds;
- regression package use and the cross-head interaction are training-seed-sensitive;
- neither package is universally superior independent of head, task dynamics, or required detail.

Table 4.8 — Context-form evidence and comparison licences. This table prevents rows from different designs being read as one Cartesian causal factorial.

Question	Tested comparison	What is held fixed or isolated	What remains co-changed or confounded	Licence and evidence level	Supported conclusion
Reach beyond a flat	`hier-min` vs `flat-min`	context, target and total tokens; codec, head, clips; pair-	resolution and nominal reach change together	**MATCHED**, untouched E2	benefit concentrates where only the hierarchy can address

Question	Tested comparison	What is held fixed or isolated	What remains co-changed or confounded	Licence and evidence level	Supported conclusion
window		derived reach band			the relevant past; supports reach
Fixed-span spatial abstraction	`spat18` vs `flat-budget` under each head	18-frame span, recent fine tail, head, codec and evaluation records	replacing older fine history with coarse history reduces tokens from 1,152 to 672	**DEVELOPMENT_DIAGNOSTIC**	coarse history costs 0.0082 under diffusion and is unresolved under regression; no intrinsic-abstraction win
Temporal versus spatial package	`strided-flat` vs `hier-long` under diffusion/regression	nominal 48-frame reach, six-frame fine tail, backbone, codec and training protocol	temporal sparsity versus spatial coarsening; 1,088 versus 1,152 tokens	**NEAR_MATCHED DEVELOPMENT_FACTORIAL**, five seeds	temporal anchors are stable under diffusion; regression and interaction are heterogeneous
Stride-2 family	`hier-s2-min` vs `flat-short`	512 context tokens and paired records	target stride/slots/tokens, auxiliary loss, total length and optimization load	**WHOLE_CONFIGURATION**, untouched E2	the complete B1 configuration wins; no pure context-stride effect
Third representation level	`hier3` vs `hier-long`	1,152 context tokens, nominal reach and diffusion backbone	target tokens, loss allocation, fine/coarse allocation, optimization load and top-level information floor	**DEVELOPMENT_DIAGNOSTIC**, seed 0	two-level error minus three-level error = −0.0196 [−0.0248,−0.0146], so the three-level probe is worse; no general depth law
Stream contribution	coarse/fine blinding; `hier3` top blinding	trained weights and rollout records	zeroing a stream is out of distribution	**DEVELOPMENT_DIAGNOSTIC**	removing coarse history harms re-entry, removing fine history causes renderer collapse, and the tested top stream contributes little; magnitudes are not information accounting

Executed experimental coverage and explicit non-executed cells

Study / role	Dataset	Package / contrast	Ctx tokens	Head	Train seeds	Codec	Sampler / NFE	Evidence state
E2 lower reach	LoopMom holdout	hier-min / flat-min	896	diff	0–1	original	DDIM 16 / s0	untouched confirmed
E2 interior	LoopMom holdout	hier-long / flat-budget	1,152	diff	0–2	original	DDIM 16 / s0	untouched confirmed
E2 middle	LoopMom holdout	hier-c1 / flat-c1	1,792	diff	0	original	DDIM 16 / s0	unresolved
E2 upper	LoopMom holdout	hier-c2 / flat-c2	2,432	diff	0; 30k/60k	original	DDIM 16 / s0	flat confirmed
E2 dense reach	LoopMom holdout	hier-rich / flat-long	3,072	diff	0–1	original	DDIM 16 / s0	flat confirmed
B1 whole configuration	LoopMom holdout	hier-s2-min / flat-short	512	diff	0–1	original	DDIM 16 / s0	configuration confirmed
E4b shape × head	LoopMom development	temporal 1,088 / spatial 1,152	near-match	diff + reg	0–4	original	DDIM 16 / s0	seed robustness
E7a codec	LoopMom protected	four registered contrasts	896–2,432	diff	0	alternate	DDIM 16 / s0	codec robustness
E7c inference	LoopMom protected	four registered contrasts	896–2,432	diff	0	original	NFE 8/16/32; s0–2	sampler robustness
E5a reliability	long-loop hgrid3 set	long-reach / dense comparator	registered pair	diff	0–2	original	registered sampler	not replicated
E8a explicit access	LoopMom protected	raw K14/K38/K48 + neural refs	not matched	raw + diff refs	seed-0 refs	raw / original	exact pose / DDIM 16	privileged reference
E6 external boundary	Long Moving-MNIST	hierarchical / flat	1,152	diff	0–2	original	registered sampler	mixed boundary
B1 fixed-target	LoopMom	stride-2 / flat-short	512	diff	—	—	—	not executed; claim scoped
E9 extension	natural video	post-freeze extension	—	—	—	—	—	skipped; no incremental utility

Only executed cells support empirical claims. Dashes and red-tinted rows are structural gaps, not zero effects; no Cartesian completion is implied.

Figure 4.2 — Executed configuration and evidence matrix. Confirmatory, robustness, replication, privileged-reference and external-boundary rows retain their distinct evidence roles. Red-tinted rows are explicit structural gaps, not zero effects or invitations to infer unobserved Cartesian cells. In particular, the executed B1 whole-configuration result is separated from its unexecuted fixed-target control.

Static hidden content can reward sparse full-resolution anchors because old pixels remain informative. Dynamically evolving or low-detail hidden state may reward spatial compression instead. This study locates one operating region.

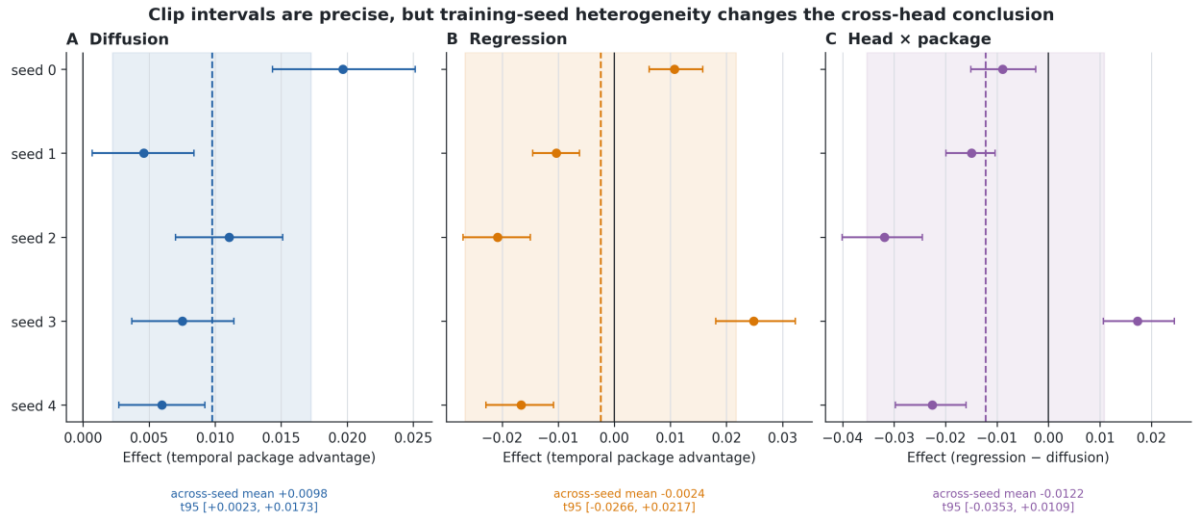


Figure 4.3 — Package effects by training seed. Per-seed intervals condition on each trained model; the seed summary uses training seeds as units.

4.6 Robustness of the Principal Directions

4.6.1 Sampler allocation and randomness

E7c crosses four frozen seed-0 diffusion contrasts with NFE 8/16/32 at sampler seed 0 and NFE 16 at sampler seeds 1/2:

1. 896-token reach;
2. 1,152-token interior frontier;
3. 1,088-versus-1,152 package shape; and
4. the 2,432-token flat-fidelity inversion.

All 20 point estimates retain their registered direction, and 18 simultaneous lower bounds exceed zero. The first three contrasts are family-wise clean under every variant. The 2,432 inversion remains positive but is unresolved at sampler seed 1 $+0.0098[-0.0001, +0.0196]$ and seed 2 $+0.0077[-0.0013, +0.0167]$. The verdict is **directionally robust**, not sampler invariant. This study changes inference allocation for frozen seed-0 predictors; it does not add training-seed or dataset robustness.

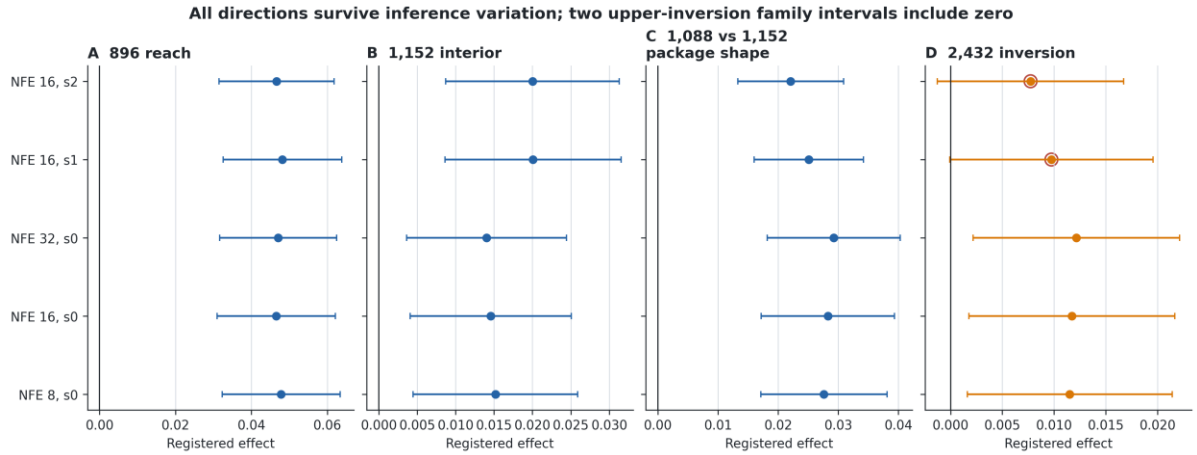


Figure 4.4 — Sampler/NFE robustness. Open points mark upper-inversion intervals that include zero.

4.6.2 Independently trained codec

E7a changes the whole continuous latent interface: a second codec is trained independently, normalization is recomputed, and the seven seed-0 predictors are retrained. Codec weights, reconstruction error, latent geometry, and normalization therefore change together.

Table 4.9 — Whole-codec robustness.

Codec	896 reach	1,152 interior	1,088 vs 1,152 shape	2,432 inversion
Original	+0.0494 [0.0339, 0.0649]	+0.0283 [0.0169, 0.0397]	+0.0253 [0.0163, 0.0343]	+0.0150 [0.0065, 0.0235]
Alternate	+0.0521 [0.0374, 0.0669]	+0.0439 [0.0310, 0.0569]	+0.0112 [0.0039, 0.0184]	+0.0079 [−0.0006, 0.0165]

All eight point estimates retain direction, and seven simultaneous lower bounds exceed zero. The alternate-codec upper inversion is unresolved. The verdict is **codec-directionally robust**, conditional on predictor seed 0 and one alternative codec; codec seed is not an inferential replicate and no component-level cause is identified.

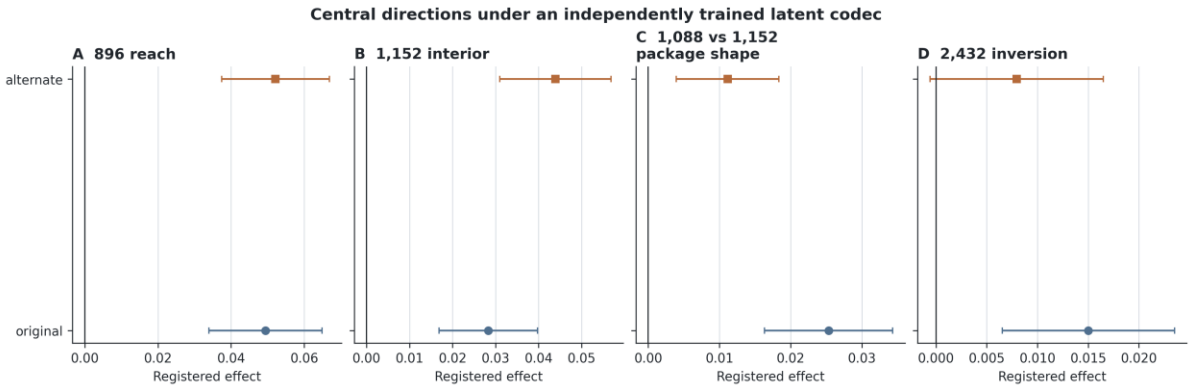


Figure 4.5 — Original and alternate codec effects under one simultaneous family.

4.7 Boundary and Negative Evidence

4.7.1 The proposed late trust boundary does not replicate

At a longer-loop operating point, seed 0 showed an early hierarchy benefit followed by a late inversion during self-fed rollout. E5a preregistered that horizon pattern and repeated the pair at two new training seeds.

Table 4.10 — Registered self-fed reliability replication. Positive favors hierarchy.

Training seed	Early h1–24	Late h61–256
0	+0.0204 [+0.0133, +0.0279]	−0.0064 [−0.0095, −0.0032]
1	+0.0082 [+0.0035, +0.0133]	+0.0074 [+0.0038, +0.0112]
2	+0.0230 [+0.0150, +0.0315]	+0.0087 [+0.0035, +0.0139]

The early advantage is positive at all three seeds. Neither new seed reproduces the required late negative direction; both reverse it. The registered verdict is **NOT_REPLICATED**. No stable approximately-24-frame trust boundary is established, and the gated E5b localization programme is not authorized. The conceptual distinction between addressable history and reliable self-fed reuse remains valid, but it is not a third empirical law.

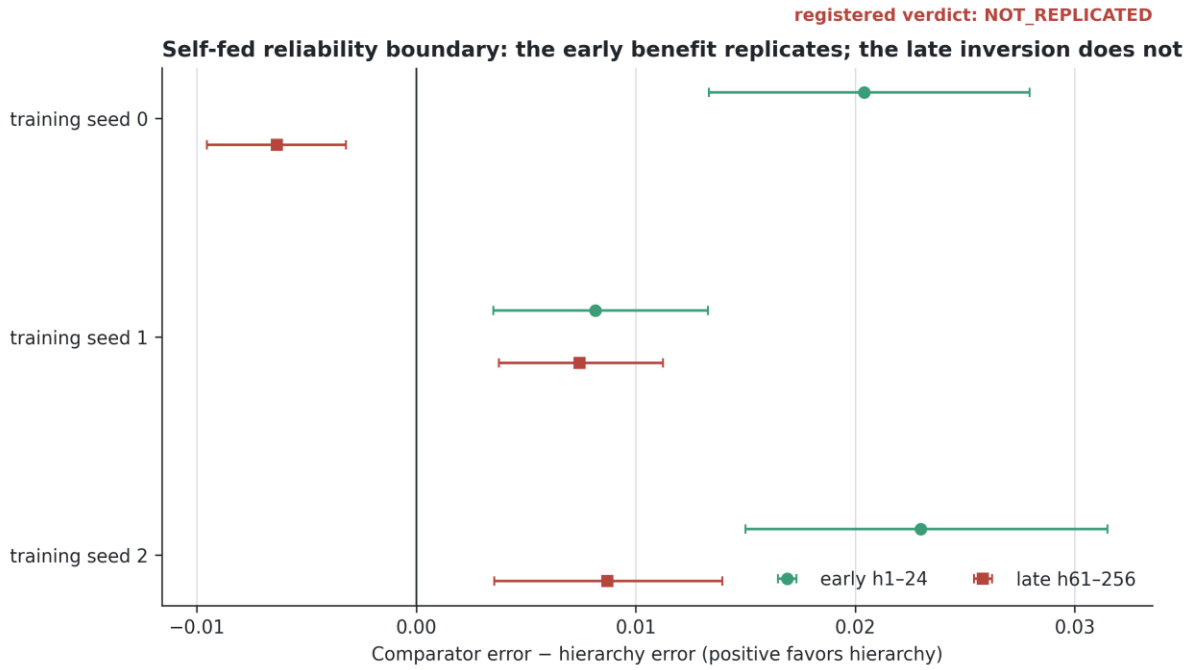


Figure 4.6 — Early benefit and seed-0-only late inversion.

4.7.2 Privileged pose-indexed raw access

E8a asks how much error remains when addressing is explicit. A world-coordinate mosaic stores raw warm-up pixels and is queried using exact saved future viewport positions. It receives raw pixels, future poses, and no token-matched budget; it is therefore a privileged access reference, not a deployable neural competitor.

Table 4.11 — Simultaneous pose-indexed raw-memory effects.

Registered contrast	Estimate	Simultaneous 95% CI
Raw K14 minus raw K48	+0.0723	[+0.0548, +0.0898]
Raw K38 minus raw K48	+0.0210	[+0.0096, +0.0325]
`hier-min` minus raw K48	+0.1219	[+0.1031, +0.1407]
`hier-long` minus raw K48	+0.1368	[+0.1190, +0.1545]
`strided-flat` minus raw K48	+0.1134	[+0.0944, +0.1324]
`flat-c2` minus raw K48	+0.1310	[+0.1122, +0.1498]

Raw K48 reaches foreground MSE 0.0494, full-frame MSE 0.0027, and foreground recall 0.8438, versus foreground MSE 0.1628–0.1862 for the four neural references. The result shows that geometric reach is

not sufficient for reliable addressing and reuse. It does not show that raw mosaics are practical or that hierarchy is unnecessary.

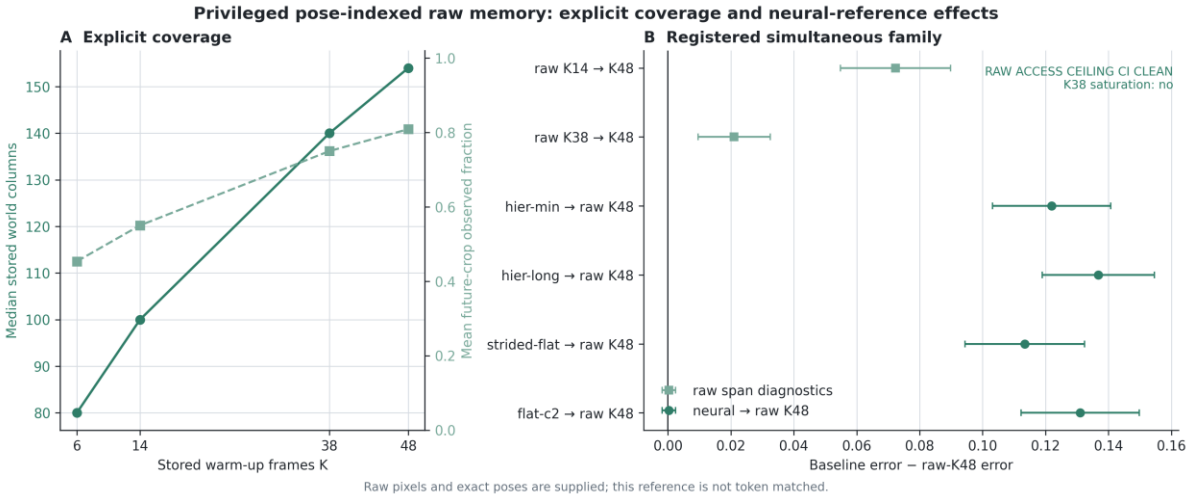


Figure 4.7 — Privileged explicit-access reference.

4.7.3 Persistent-object external boundary

E6 compares matched 1,152-token flat and hierarchical packages at training seeds 0–2, using a 48-frame warm-up, 300 self-fed targets, and 100 protected clips.

To make unlike endpoint directions comparable, the registered harmonized effect is

$$\Delta_m = \begin{cases} \bar{m}_{\text{flat}} - \bar{m}_{\text{hier}}, & m \in \{\text{foreground MSE, union MSE, trajectory error}\}, \\ \bar{m}_{\text{hier}} - \bar{m}_{\text{flat}}, & m \in \{\text{identity accuracy, coverage}\}. \end{cases}$$

Thus positive values always favor hierarchy; the transformation changes only sign orientation, not the endpoint denominators or paired records.

Table 4.12 — E6 simultaneous effects. Positive favors hierarchy.

Seed	Foreground MSE	Union MSE	Trajectory error	Identity accuracy	Coverage
0	+0.0036 [−0.0074,+0.0146]	+0.0102 [+0.0019,+0.0185]	+2.4786 [+0.2130,+4.7443]	−0.0762 [−0.1106,−0.0418]	+0.0304 [+0.0016,+0.0591]
1	−0.0031 [−0.0127,+0.0065]	+0.0122 [+0.0052,+0.0192]	+1.4223 [−1.0646,+3.9092]	−0.0561 [−0.0934,−0.0188]	+0.0159 [−0.0163,+0.0482]
2	−0.0024 [−0.0131,+0.0083]	+0.0169 [+0.0093,+0.0245]	+4.1325 [+1.5271,+6.7380]	−0.0647 [−0.0955,−0.0338]	+0.0498 [+0.0161,+0.0834]

Absolute performance prevents overstatement:

Table 4.13 — E6 absolute performance. Both packages remain difficult in absolute terms; paired values are shown as flat / hierarchy.

Seed	Arm	Union MSE ↓	Trajectory error ↓	Identity accuracy ↑	Coverage ↑
0	flat / hierarchy	0.6861 / 0.6759	42.19 / 39.71	0.214 / 0.138	0.619 / 0.650
1	flat / hierarchy	0.6901 / 0.6779	40.20 / 38.77	0.244 / 0.188	0.646 / 0.662
2	flat / hierarchy	0.6931 / 0.6763	43.79 / 39.65	0.222 / 0.158	0.599 / 0.649

The preregistered verdict is **MIXED_BOUNDARY**. Union-mask error favors hierarchy at every seed. Trajectory and coverage favor hierarchy cleanly at seeds 0 and 2 and remain directionally positive but unresolved at seed 1. Identity favors flat context at every seed; foreground-only MSE is unresolved. Hierarchy therefore better preserves *where* an object is and whether its support continues, while flat context better preserves *what* digit it is. Neither system solves the task.

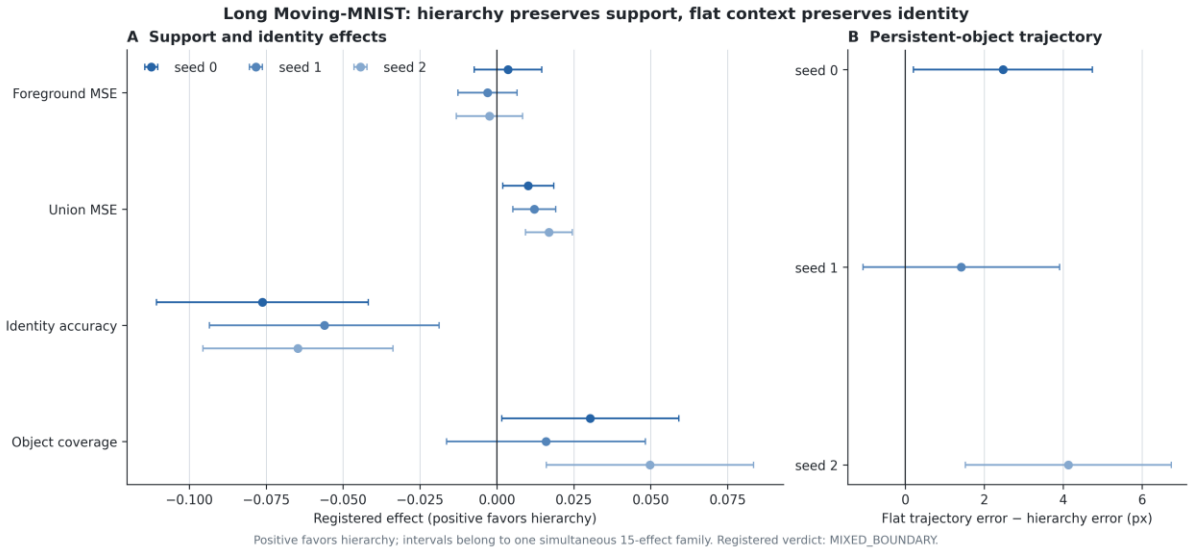


Figure 4.8 — Spatial-support/identity division of labour in E6.

4.7.4 Short and real-data competence boundaries

On canonical Moving-MNIST 10-to-10, the general predictor beats persistence but remains far behind specialized OpenSTL pixel predictors on aggregate MSE. Flat and hierarchical packages are nearly equal because no off-screen re-entry mechanism requires a longer addressable history. This is a negative control for the reach account, not a claim of benchmark leadership.

On TaxiBJ 4-to-4, the unchanged general stack is competitive with quoted OpenSTL rows on some metrics but not uniformly. The flat regression arm uses 256 context tokens and reaches MSE 0.3642; the hierarchical regression arm uses 128 tokens and reaches 0.4170. Because only one training seed was used and the task has no long memory horizon, this row demonstrates transfer competence and the cost of unnecessary abstraction, not a claim-bearing hierarchy comparison.

4.8 Context-State and Activation-Memory Synthesis

The context-package experiments and reversible-computation experiments act on different resource terms:

Table 4.14 — Dissertation-strand operating-region synthesis with evidentiary separation.

Method / strand	Primary system term or layer	Benefit	Cost or boundary	Evidence source	In the final Chapter 3 predictor?
V-BLT entropy allocation [A1]	representation/ capacity allocation	assigns finer capacity where the model's byte prediction is more dispersed	entropy is a model-internal proxy, not calibrated uncertainty or proof of optimal patches	published [A1] visual experiments and entropy maps, summarized in Chapter 2	no; shared allocation principle only
RoPE-ND [A1]	representation-coordinate interface	keeps horizontal, vertical, and temporal coordinates explicit after linearization	does not guarantee semantic routing or cross-level coherence	[A1] method and Chapter 2 derivation	no; final predictor uses learned level/role/frame embeddings
Dense flat context [A4]	$M_{\text{context/st}}$	preserves fine identity/detail	short reach at fixed budget; high cost at long reach	flat wins at 2,432/3,072 and on E6 identity	yes, as comparator packages
Spatial hierarchy [A4]	$M_{\text{context/st}}$	economical dense historical support	loses fine detail after reach saturates	hierarchy wins at 896/1,152; E6 support/continuity	yes
Temporal subsampling [A4]	$M_{\text{context/st}}$	preserves old full-resolution anchors	can miss intermediate dynamics	five-seed diffusion package-shape result	yes, as a comparator package
Gradient checkpointing	$M_{\text{activation}}$	general recomputation-based memory reduction	recomputation and schedule-dependent memory	Chapter 2 measured comparator	no
Reversible temporal replay [A2 +	$M_{\text{activation}}$	approximately horizon-independent peak activation-tape	invertibility/stability constraints, replay noise/metadata, and	Chapter 2 measured memory frontier and numerical validation	no

Method / strand	Primary system term or layer	Benefit	Cost or boundary	Evidence source	In the final Chapter 3 predictor?
dissertation extension]		footprint in the tested recurrence	no inner-loop advantage		
Consistency criteria [A3] and LoopMom instrument	measur ement and decision layer	turns trajectory consistency into self-fed, re-entry-, support-, identity-, miss/extra-, and coverage-sensitive decisions	criteria remain task-dependent proxies; LoopMom provides exact geometric observability only in its synthetic generator	[A3] criteria; Chapters 3–4 executed LoopMom/E6 endpoint programme	not a predictive module; consumed by final evaluation

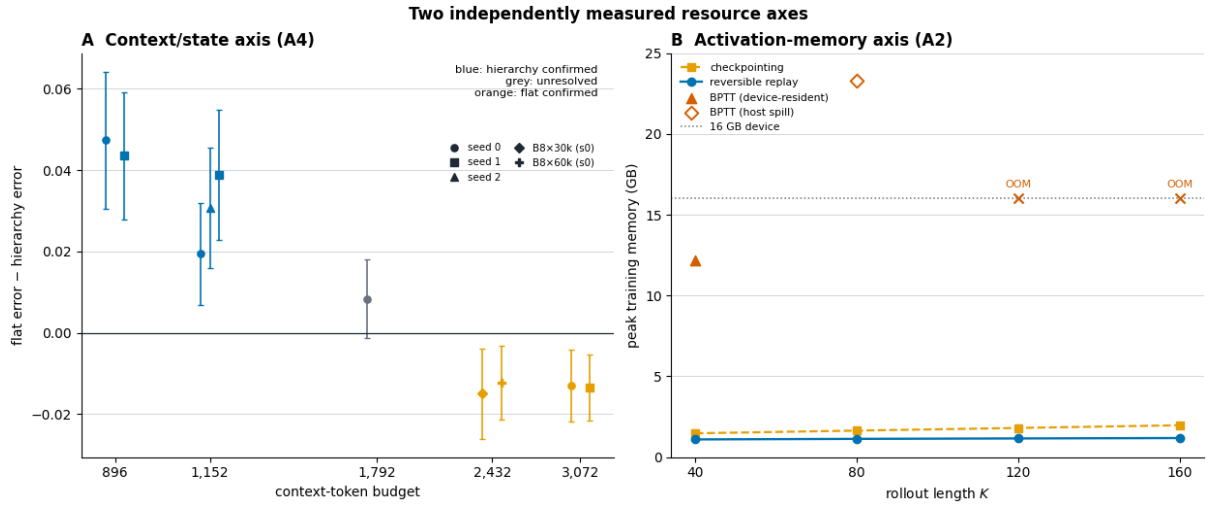


Figure 4.9 — Two independently measured resource axes. Panel A reports the Chapter 4 context-state frontier; Panel B reports the Chapter 2 activation-memory measurements. The panels do not form a joint factorial or an end-to-end model experiment. Their savings have not been shown to multiply and must not be added into one experimentally measured total-memory reduction.

The savings are not automatically multiplicative. The Chapter 4 predictor uses bounded context state but is trained on individual windows without differentiating through the long rollout. TempVerseFormer and the stochastic reversible recurrence show how activation memory can be reduced when such long temporal differentiation is required; they are not the cause of the context-package effects.

4.9 Software Toolkit and Practical Application

The research software comprises separately validated modules for:

- entropy-guided representation and RoPE-ND;
- reversible temporal transformations and memory measurement;

- hierarchical, flat, and temporally sparse context packages;
- latent diffusion, regression, and energy-based mechanism controls;
- LoopMom and persistent-object Moving-MNIST generation;
- frame, component, trajectory, identity, and coverage metrics;
- experiment authorization, purpose-locked access, content-addressed run specifications, and generated evidence artifacts.

This is an integrated research methodology and software toolkit. It is not one executable predictor that jointly uses adaptive tokenization, RoPE-ND, reversible rollout training, and hierarchical context.

The methods were used in the practical activities of ORNETIKA LLC and in the educational process of VNTU according to implementation acts dated 14 October 2025 and 19 September 2025. Those acts concern the reversible-transformer and entropy-tokenization strands. The final appendices must reproduce their approved wording and copies.

4.10 Threats to Validity and Research Limits

The principal limitations are:

1. **Synthetic mechanism scope.** LoopMom provides exact geometric-observability labels and a deliberately constrained mechanism test, but it is not natural video and does not establish unrestricted causal interpretability. E6 is also synthetic.
2. **Representation scope.** The main predictor uses one frozen two-level continuous codec. One independently trained codec supports directional robustness but not representation-family universality.
3. **Training-seed scope.** Central points use two or three training seeds; clip intervals provide conditional data uncertainty and do not replace seed replication.
4. **B1 confounding.** B1 changes target and optimization properties with context stride.
5. **No equivalence claim.** Context-token efficiency does not establish equal performance at fewer tokens.
6. **No unique crossing.** The frontier contains tested discrete points; 1,792 is unresolved.
7. **Self-fed reliability.** The late trust-boundary hypothesis does not replicate.
8. **Absolute E6 difficulty.** Identity accuracy, coverage, and trajectory error show that neither package solves the persistent-object task.
9. **Pipeline scope.** State-memory and activation-memory savings are separately measured.
10. **Release scope.** Hash-pinned artifacts support auditability, but public archive availability must be distinguished from local provenance until external URLs are published.

Future work should prioritize counterfactual hidden-state instruments, dynamic hidden content, natural-video memory benchmarks, explicit learned retrieval, and larger training-seed panels. Such work would extend external validity; it is not required to support the present conditional dissertation claims.

4.11 Chapter Conclusions

1. The generation-head study establishes a regime boundary rather than a universal ranking: diffusion is superior in the matched-capacity single-step oracle-coverage regime at the reported, unequal total inference allocations, regression is superior in deterministic best-of-1 rollout, and energy-based descent is a characterized negative at the tested scale.
2. On the untouched LoopMom holdout, hierarchy is confirmed precisely in registered populations where the longer package contains re-entry evidence outside the comparator's reach. This supports reach as the mechanism under the tested representation and head.
3. The simultaneous frontier confirms hierarchy at 896 and 1,152 context tokens, leaves 1,792 unresolved, and confirms flat full-resolution context at 2,432 and 3,072. No continuous crossing or universal hierarchy advantage is inferred.
4. At nominal 48-frame reach, the confirmed hierarchical packages use 2.67–3.43 times fewer context tokens than dense fine history. This is context-state reach efficiency, not equal performance, compute, or information.
5. Temporal full-resolution anchors are stable across five diffusion training seeds at the tested static-world point, while regression and the head-by-package interaction are training-seed-sensitive. Spatial and temporal compression are therefore not interchangeable.
6. Sampler/NFE and alternate-codec studies retain all principal point-estimate directions; the upper flat-fidelity inversion becomes a precision boundary in some variants.
7. The proposed late self-fed trust boundary fails to replicate. Explicit pose-indexed raw access shows a substantial addressing gap, and E6 separates hierarchy-favouring spatial support/continuity from flat-favouring identity fidelity.
8. The complete systems result has two independently measured resource axes. Context packaging reduces the state cost of retaining distant history; reversible replay reduces the activation cost of differentiating through long processes. The practical design rule is to compress long-lived state when reach is limiting, preserve detail when fidelity is limiting, and reconstruct activations when the training tape dominates.

The results of this chapter provide the experimental basis for Tasks 5–7 and for article [A4]. The curated configuration-and-evidence appendix retains the complete observed grid and secondary receipts without interrupting the main argument.

General Conclusions

The dissertation addresses the systems problem of consistent long-horizon video generation under bounded computation and memory. Its central methodological result is that “memory” must be decomposed before it can be optimized:

$$M_{\text{system}} = M_{\text{parameters}} + M_{\text{optimizer}} + M_{\text{context/state}} + M_{\text{activations}} + M_{\text{transient}}.$$

Hierarchical and multirate context packaging reduce the context/state cost of retaining distant history. Reversible temporal computation reduces the activation cost of differentiating through a long process. The two mechanisms were measured separately and are not presented as one experimentally integrated predictor or as automatically multiplicative savings. Their shared design principle is:

Compress what must be remembered; reconstruct what need not be stored.

Three propositions connect the dissertation's article strands.

1. **Information allocation is task-dependent.** Representation and context design must trade temporal reach against the spatial or semantic detail that the task requires.
2. **Retained-state memory and activation-tape memory are distinct resource axes.** Context packaging changes which past evidence remains addressable; reversible replay changes which intermediate computations must be retained for differentiation. Their benefits were measured separately and are not assumed to multiply.
3. **The appropriate intervention is determined by the operating region and the evaluation construct.** Entropy-guided representation, dense or multirate context, checkpointing, reversibility, and consistency endpoints answer different system questions; none is a universal replacement for the others.

The aim of the research has been achieved through the following principal results, aligned with the seven tasks.

1. Systems decomposition and problem formulation (Task 1). Video generation is formalized as a complex dynamic system with interacting representation levels, partial observability, stochastic transitions, bounded resources, and informational, structural-algorithmic, computational, and target uncertainties. The analysis identifies two independent resource bottlenecks: the context/state cost of retaining historical evidence and the activation cost of long temporal optimization. This decomposition replaces the ambiguous claim that long video has one generic memory problem.

2. Consistency criteria and measurement (Task 2). Established consistency concerns are organized into the dissertation-specific [A3] systems taxonomy, within which conceptual, hierarchical, and trajectory consistency are explicitly defined and operationalized. This claims the dissertation's formalization and

measurement apparatus, not priority over the general terms. Trajectory consistency is operationalized through self-fed rollout, re-entry, foreground/background/union, miss/extra, object-support, trajectory, identity, and coverage endpoints. The LoopMom instrument makes geometric observability exactly computable and defines pair-specific reach-differential populations. Clips, not autocorrelated frames, are the inference units; training seeds are treated as a separate uncertainty level, and registered families use simultaneous max-statistic intervals.

3. Adaptive representation of spatio-temporal uncertainty (Task 3). The V-BLT method uses entropy-guided adaptive decomposition to allocate representation resources to high-information regions. RoPE-ND preserves multi-axis positional structure and provides a coordinate system for variable-patch and cross-resolution models. This strand is validated in [A1]. The final Chapter 3 predictor uses learned level/role/frame embeddings instead; its context-package result does not depend on an unmeasured RoPE-ND retrofit.

4. Reversible optimization of long temporal processes (Task 4). TempVerseFormer and time-agnostic backpropagation reconstruct intermediate states during reverse replay, giving an approximately horizon-independent peak activation-tape footprint for the tested reversible recurrence. The stochastic extension stores a sampled-noise sequence whose size grows with the horizon (or would require equivalent deterministic regeneration metadata), while avoiding the larger layer-by-time activation graph. With the correct noise replayed, states are reconstructed within reported numerical tolerances. In the reported numerical gradient test, reverse replay and BPTT have cosine similarity 1.000000, establishing directional agreement but not, by itself, gradient-magnitude equality. In the measured rollout-training frontier, BPTT uses 12.2 GB at $K = 40$ and fails at $K = 120$, while reversible replay remains approximately 1.1–1.2 GB through $K = 160$. Gradient checkpointing remains memory-feasible at 1.47–1.97 GB; because matched runtime was not reported for these temporal-rollout arms, no Pareto equivalence is claimed. The three-axis taxonomy shows where reversibility pays in the tested network-depth and invertible-temporal-recurrence settings, and where it does not pay in the measured inner optimization loop: there it saves only 0.26% relative to checkpointing while increasing computation. Invertibility also does not guarantee trajectory stability.

5. Multi-stream latent video model and context-packaging operating regions (Task 5). A two-level continuous latent predictor is developed with flat, spatially hierarchical, and temporally sparse context streams, a shared joint-attention backbone, v-parameterized window diffusion, and autoregressive ring-buffer rollout. The manipulated object is context packaging; reach and fidelity are explanatory consequences.

On the hash-pinned untouched LoopMom holdout, the registered $14 < \Delta t \leq 48$ reach-band effects are +0.0980 and +0.0914 across two training seeds. The simultaneous frontier confirms hierarchy at 896 and

1,152 context tokens, leaves 1,792 unresolved, and confirms flat full-resolution context at 2,432 and 3,072. At equal nominal 48-frame addressable reach, 48 dense fine frames cost 3,072 context tokens, while 48 coarse frames plus a two- or six-frame fine tail cost 896 or 1,152. The hierarchy therefore obtains the same nominal reach with 2.67–3.43 times fewer context tokens.

This is a context-state reach-efficiency result, not proof of equal performance, equal information, equal total compute, or universal hierarchy superiority. The largest tested confirmed hierarchy-favouring point is 1,152 and the smallest tested confirmed flat-favouring point is 2,432; no unique crossing or interpolation is inferred.

6. Research toolkit and intelligent information technology (Task 6). A research software toolkit implements entropy-based representation experiments, reversible temporal optimization, context packages, latent diffusion and control heads, LoopMom and persistent-object generators, complete metrics, fail-closed experiment authorization, purpose-locked access, content-addressed run specifications, and immutable evidence generation. These modules form an integrated methodology and software environment. They are not described as one measured end-to-end model combining adaptive tokenization, RoPE-ND, reversible rollout training, and hierarchical prediction.

7. Experimental verification and boundary identification (Task 7). The mechanism comparison shows that head preference depends on inference regime: diffusion wins the single-step best-of-8 coverage study, regression wins deterministic best-of-1 rollout, and energy-based descent is a characterized negative at the tested scale. Temporal full-resolution packaging is stable over five diffusion seeds at the tested static-world operating point, whereas regression and the head-by-package interaction are training-seed-sensitive.

All principal point-estimate directions survive the registered sampler/NFE grid and one independently trained codec. The 2,432-token flat inversion becomes family-wise unresolved under some alternate sampler seeds and under the alternate codec, so the upper edge is a precision boundary rather than a universally robust threshold.

The preregistered self-fed reliability study reproduces the early hierarchy advantage at all three training seeds but not the seed-0 late inversion. No stable trust boundary is established. Privileged pose-indexed raw access substantially outperforms the registered neural references on the static world, showing that placing information in context is not the same as addressing and reusing it reliably.

The protected persistent-object 48-to-300 Moving-MNIST study provides a mixed external boundary. Hierarchy reduces union-mask error at all three seeds and improves trajectory/coverage cleanly at two; flat context preserves digit identity better at every seed; foreground-only MSE is unresolved. Absolute identity accuracy remains approximately 0.14–0.24 and coverage approximately 0.60–0.66, so neither

package solves the task. The result separates *where an object is and whether it persists* from *what the object is*.

The dissertation's empirical rule is therefore conditional:

> **Hierarchy buys reach; flat context buys fidelity.**

Hierarchy pays when compression or multirate storage brings memory-relevant history within the budget. Flat context recovers when reach is already available and fine identity or appearance is the limiting resource. Storage, addressing, compression, and self-fed reuse must be evaluated as different system properties.

Practical Significance

The developed methods and software support reproducible study of long spatio-temporal processes on bounded hardware. The reversible-transformer and entropy-tokenization strands were used in the activities documented by the ORNETIKA LLC and VNTU implementation acts. The repository supplies controlled datasets, generators, evaluation code, protocols, and evidence provenance. The present research establishes synthetic and benchmark operating regions; it does not claim deployment validation in medical, environmental, or safety-critical systems.

Limitations and Directions for Further Research

The main limitations are the controlled synthetic nature of LoopMom, the synthetic status of E6, the modest number of training seeds, dependence on one predictor family and two continuous codec instances, the whole-configuration B1 confound, and the absence of one end-to-end experiment combining state-memory and activation-memory interventions.

The most informative extensions are:

1. paired counterfactual worlds identical over the visible short context but different in hidden re-entry content;
2. dynamic hidden-state tasks crossed with low- and high-detail identity requirements;
3. natural-video disappearance/reappearance benchmarks and explicit learned-retrieval baselines;
4. larger training-seed panels at the unresolved and upper-frontier points;
5. rollout-through-time objectives that compare checkpointing and reversible replay directly in a hierarchical predictor.

These directions extend external validity and integration. They do not alter the present conclusion: compress historical state when reach is limiting, preserve dense detail when fidelity is limiting, and reconstruct activations when the temporal training tape is the binding resource.

Taken together, the dissertation is an integrated systems methodology with separately measured representation, retained-state, activation-memory, and evaluation contributions. It is not one executable pipeline in which every published strand is claimed to cause the Chapter 4 effects.

References

External sources are numbered by first appearance in the assembled dissertation.

1. Tan C., Li S., Gao Z., et al. OpenSTL: A Comprehensive Benchmark of Spatio-Temporal Predictive Learning. *NeurIPS 36 (D&B)*, 2023.
2. Ho J., Jain A., Abbeel P. Denoising Diffusion Probabilistic Models. *NeurIPS 33*, 2020.
3. Rombach R., Blattmann A., Lorenz D., Esser P., Ommer B. High-Resolution Image Synthesis with Latent Diffusion Models. *CVPR*, 2022.
4. Peebles W., Xie S. Scalable Diffusion Models with Transformers (DiT). *ICCV*, 2023.
5. Згуровський М. З., Панкратова Н. Д. *Основи системного аналізу: підручник*. Київ: Видавнича група BHV, 2007. 544 с. ISBN 978-966-552-153-2.
6. Zgurovsky M. Z., Pankratova N. D. *System Analysis: Theory and Applications*. 1st ed. Springer Berlin, Heidelberg, 2007. XXII, 447 p. DOI: 10.1007/978-3-540-48880-4.
7. Mesarović M. D., Macko D., Takahara Y. *Theory of Hierarchical, Multilevel Systems*. Academic Press, 1970.
8. Simon H. A. The Architecture of Complexity. *Proceedings of the American Philosophical Society* 106(6):467–482, 1962.
9. Shannon C. E. A Mathematical Theory of Communication. *Bell System Technical Journal* 27:379–423, 623–656, 1948.
10. Kalman R. E. A New Approach to Linear Filtering and Prediction Problems. *Journal of Basic Engineering* 82(1):35–45, 1960.
11. Ashby W. R. *An Introduction to Cybernetics*. Chapman & Hall, 1956.
12. Vaswani A., Shazeer N., Parmar N., et al. Attention Is All You Need. *NeurIPS 30*, 2017.
13. Dao T., Fu D. Y., Ermon S., Rudra A., Ré C. FlashAttention: Fast and Memory-Efficient Exact Attention with IO-Awareness. *NeurIPS 35*, 2022.
14. Dai Z., Yang Z., Yang Y., Carbonell J., Le Q. V., Salakhutdinov R. Transformer-XL: Attentive Language Models Beyond a Fixed-Length Context. *ACL*, 2019.
15. Rae J. W., Potapenko A., Jayakumar S. M., Lillicrap T. P. Compressive Transformers for Long-Range Sequence Modelling. *ICLR*, 2020.
16. Wu Y., Rabe M. N., Hutchins D., Szegedy C. Memorizing Transformers. *ICLR*, 2022.
17. Kitaev N., Kaiser Ł., Levskaya A. Reformer: The Efficient Transformer. *ICLR*, 2020.
18. Beltagy I., Peters M. E., Cohan A. Longformer: The Long-Document Transformer. arXiv:2004.05150, 2020.
19. Gu A., Dao T. Mamba: Linear-Time Sequence Modeling with Selective State Spaces. arXiv:2312.00752, 2023.
20. Saxena V., Ba J., Hafner D. Clockwork Variational Autoencoders. *NeurIPS 34*, 2021.
21. Harvey W., Naderiparizi S., Masrani V., Weilbach C., Wood F. Flexible Diffusion Modeling of Long Videos (FDM). *NeurIPS 35*, 2022.

22. Po R., Nitzan Y., Zhang R., Chen B., Dao T., Shechtman E., Wetzstein G., Huang X. Long-Context State-Space Video World Models. arXiv:2505.20171, 2025.
23. Oshima Y., Iwasawa Y., Suzuki M., Matsuo Y., Furuta H. WorldPack: Compressed Memory Improves Spatial Consistency in Video World Modeling. arXiv:2512.02473, 2025.
24. Wu T., Yang S., Po R., Xu Y., Liu Z., Lin D., Wetzstein G. Video World Models with Long-term Spatial Memory. arXiv:2506.05284, 2025.
25. Ranzato M., Chopra S., Auli M., Zaremba W. Sequence Level Training with Recurrent Neural Networks (exposure bias). *ICLR*, 2016.
26. Bengio S., Vinyals O., Jaitly N., Shazeer N. Scheduled Sampling for Sequence Prediction with Recurrent Neural Networks. *NeurIPS 28*, 2015.
27. Huang X., Li Z., He G., Zhou M., Shechtman E. Self Forcing: Bridging the Train-Test Gap in Autoregressive Video Diffusion. *NeurIPS 2025* (spotlight); arXiv:2506.08009.
28. Werbos P. J. Backpropagation Through Time: What It Does and How to Do It. *Proceedings of the IEEE* 78(10), 1990.
29. Williams R. J., Peng J. An Efficient Gradient-Based Algorithm for On-Line Training of Recurrent Network Trajectories (truncated BPTT). *Neural Computation* 2(4), 1990.
30. Chen T., Xu B., Zhang C., Guestrin C. Training Deep Nets with Sublinear Memory Cost. arXiv:1604.06174, 2016.
31. Griewank A., Walther A. Algorithm 799: revolve — An Implementation of Checkpointing for the Reverse or Adjoint Mode of Computational Differentiation. *ACM TOMS* 26(1), 2000.
32. Gomez A. N., Ren M., Urtasun R., Grosse R. B. The Reversible Residual Network: Backpropagation Without Storing Activations. *NeurIPS 30*, 2017.
33. Koutník J., Greff K., Gomez F., Schmidhuber J. A Clockwork RNN. *Proceedings of Machine Learning Research* 32(2):1863–1871, ICML, 2014.
34. Kim T., Ahn S., Bengio Y. Variational Temporal Abstraction. *NeurIPS 32*, 2019.
35. Zakharov A., Guo Q., Fountas Z. Long-Horizon Video Prediction Using a Dynamic Latent Hierarchy. arXiv:2212.14376, submitted 2022, revised 2023.
36. Yan W., Hafner D., James S., Abbeel P. Temporally Consistent Transformers for Video Generation (TECO). *ICML*, 2023.
37. Chandratreya I. P., Charatan D., Van Hoorick B., Zakharov S., Guizilini V., Isola P., Sitzmann V. MilliVid: Hierarchical Latents for Long-Range Consistency in Video Generation. arXiv:2606.09056, 2026.
38. Liu Y., Zhang K., Li Y., Yan Z., Gao C., Chen R., Yuan Z., Huang Y., Sun H., Gao J., He L., Sun L. Sora: A Review on Background, Technology, Limitations, and Opportunities of Large Vision Models. arXiv:2402.17177, 2024.
39. Lipton Z. C. The Mythos of Model Interpretability. *Communications of the ACM* 61(10), 2018.
40. Rudin C. Stop Explaining Black Box Machine Learning Models for High Stakes Decisions and Use Interpretable Models Instead. *Nature Machine Intelligence* 1, 2019.
41. von Bertalanffy L. *General System Theory: Foundations, Development, Applications*. George Braziller, 1968.

42. Goodfellow I., Pouget-Abadie J., Mirza M., et al. Generative Adversarial Networks. *NeurIPS 27*, 2014.
43. Kingma D. P., Welling M. Auto-Encoding Variational Bayes. *ICLR*, 2014.
44. Kendall A., Gal Y. What Uncertainties Do We Need in Bayesian Deep Learning for Computer Vision? *NeurIPS 30*, 2017.
45. Guo C., Pleiss G., Sun Y., Weinberger K. Q. On Calibration of Modern Neural Networks. *Proceedings of Machine Learning Research* 70:1321–1330, ICML, 2017.
46. Bhadra S., Kelkar V. A., Brooks F. J., Anastasio M. A. On Hallucinations in Tomographic Image Reconstruction. *IEEE Transactions on Medical Imaging* 40(11):3249–3260, 2021. DOI: 10.1109/TMI.2021.3077857.
47. Ebel P., Sainte Fare Garnot V., Schmitt M., Wegner J. D., Zhu X. X. UnCRtainTS: Uncertainty Quantification for Cloud Removal in Optical Satellite Time Series. *IEEE/CVF Conference on Computer Vision and Pattern Recognition Workshops*, pp. 2086–2096, 2023. DOI: 10.1109/CVPRW59228.2023.00202.
48. Huot F., Hu R. L., Goyal N., Sankar T., Ihme M., Chen Y.-F. Next Day Wildfire Spread: A Machine Learning Data Set to Predict Wildfire Spreading From Remote-Sensing Data. *IEEE Transactions on Geoscience and Remote Sensing* 60:1–13, 2022. DOI: 10.1109/TGRS.2022.3192974.
49. Shaddy B., Ray D., Farguell A., et al. Generative Algorithms for Fusion of Physics-Based Wildfire Spread Models with Satellite Data for Initializing Wildfire Forecasts. *Artificial Intelligence for the Earth Systems* 3(3):e230087, 2024. DOI: 10.1175/AIES-D-23-0087.1.
50. Bond-Taylor S., Leach A., Long Y., Willcocks C. G. Deep Generative Modelling: A Comparative Review of VAEs, GANs, Normalizing Flows, Energy-Based and Autoregressive Models. *IEEE TPAMI* 44(11), 2022.
51. Ji Z., Lee N., Frieske R., et al. Survey of Hallucination in Natural Language Generation. *ACM Computing Surveys* 55(12), 2023.
52. Song J., Meng C., Ermon S. Denoising Diffusion Implicit Models. *ICLR*, 2021.
53. OpenAI (Brooks T., Peebles B., et al.). Video Generation Models as World Simulators (Sora technical report), 2024.
54. Ho J., Salimans T., Gritsenko A., Chan W., Norouzi M., Fleet D. J. Video Diffusion Models. *NeurIPS 35*, 2022.
55. Blattmann A., Rombach R., Ling H., Dockhorn T., Kim S. W., Fidler S., Kreis K. Align Your Latents: High-Resolution Video Synthesis with Latent Diffusion Models. *CVPR*, 2023.
56. Blattmann A., Dockhorn T., Kulal S., et al. Stable Video Diffusion: Scaling Latent Video Diffusion Models to Large Datasets. arXiv:2311.15127, 2023.
57. Singer U., Polyak A., Hayes T., et al. Make-A-Video: Text-to-Video Generation without Text-Video Data. *ICLR*, 2023.
58. Ho J., Chan W., Saharia C., et al. Imagen Video: High Definition Video Generation with Diffusion Models. arXiv:2210.02303, 2022.
59. Villegas R., Babaeizadeh M., Kindermans P.-J., et al. Phenaki: Variable Length Video Generation from Open Domain Textual Descriptions. arXiv:2210.02399, 2022.

60. Yu L., Lezama J., Gundavarapu N. B., et al. MAGVIT: Masked Generative Video Transformer. *CVPR*, 2023.
61. Yu L., Lezama J., Gundavarapu N. B., et al. Language Model Beats Diffusion — Tokenizer Is Key to Visual Generation. *ICLR*, 2024.
62. Bruce J., Dennis M., Edwards A., et al. Genie: Generative Interactive Environments. *ICML*, 2024.
63. Hu A., Russell L., Yeo H., et al. GAIA-1: A Generative World Model for Autonomous Driving. arXiv:2309.17080, 2023.
64. Ha D., Schmidhuber J. World Models. arXiv:1803.10122, 2018.
65. Hafner D., Lillicrap T., Ba J., Norouzi M. Dream to Control: Learning Behaviors by Latent Imagination. *ICLR*, 2020.
66. Hafner D., Pasukonis J., Ba J., Lillicrap T. Mastering Diverse Domains through World Models. arXiv:2301.04104, 2023.
67. Micheli V., Alonso E., Fleuret F. Transformers Are Sample-Efficient World Models. *ICLR*, 2023.
68. Pasukonis J., Lillicrap T., Hafner D. Evaluating Long-Term Memory in 3D Mazes (Memory Maze). arXiv:2210.13383, 2022.
69. Dosovitskiy A., Beyer L., Kolesnikov A., et al. An Image is Worth 16×16 Words: Transformers for Image Recognition at Scale (ViT). *ICLR*, 2021.
70. Arnab A., Dehghani M., Heigold G., et al. ViViT: A Video Vision Transformer. *ICCV*, 2021.
71. Liu Z., Ning J., Cao Y., et al. Video Swin Transformer. *CVPR*, 2022.
72. Pagnoni A., Pasunuru R., Rodriguez P., et al. Byte Latent Transformer: Patches Scale Better Than Tokens. arXiv:2412.09871, 2024.
73. van den Oord A., Vinyals O., Kavukcuoglu K. Neural Discrete Representation Learning (VQ-VAE). *NeurIPS 30*, 2017.
74. Yan W., Zhang Y., Abbeel P., Srinivas A. VideoGPT: Video Generation using VQ-VAE and Transformers. arXiv:2104.10157, 2021.
75. Razavi A., van den Oord A., Vinyals O. Generating Diverse High-Fidelity Images with VQ-VAE-2. *NeurIPS 32*, 2019.
76. Child R. Very Deep VAEs Generalize Autoregressive Models and Can Outperform Them on Images. *ICLR*, 2021.
77. Vahdat A., Kautz J. NVAE: A Deep Hierarchical Variational Autoencoder. *NeurIPS 33*, 2020.
78. Sønderby C. K., Raiko T., Maaløe L., Sønderby S. K., Winther O. Ladder Variational Autoencoders. *NeurIPS 29*, 2016.
79. Peng Z., Ma J., Sun H., et al. Compression and Retrieval: Implicit Memory Retrieval for Video World Models. arXiv:2606.23105, 2026.
80. Yu J., Gao J., Bai J., et al. MemLearner: Learning to Query Context Memory for Video World Models. arXiv:2606.31734; ECCV 2026.
81. Wei Z., Guo X., Li X., et al. Geometry-Aware Implicit Memory for Video World Models. arXiv:2606.02436, 2026.
82. Zhang S., Zhang Z., Huang S., et al. MBench: A Comprehensive Benchmark on Memory Capability for Video World Models. arXiv:2606.00793, 2026.

83. Chen H., Zhou K., Hua H., et al. MemoBench: Benchmarking World Modeling in Dynamically Changing Environments. arXiv:2606.27537, 2026.
84. LeCun Y., Chopra S., Hadsell R., Ranzato M., Huang F. A Tutorial on Energy-Based Learning. In *Predicting Structured Data*, MIT Press, 2006.
85. Ackley D. H., Hinton G. E., Sejnowski T. J. A Learning Algorithm for Boltzmann Machines. *Cognitive Science* 9(1), 1985.
86. Hyvärinen A. Estimation of Non-Normalized Statistical Models by Score Matching. *JMLR* 6, 2005.
87. Song Y., Ermon S. Generative Modeling by Estimating Gradients of the Data Distribution. *NeurIPS 32*, 2019.
88. Gladstone A., Nanduru G., Islam M. M., Han P., Ha H., Chadha A., Du Y., Ji H., Li J., Iqbal T. Energy-Based Transformers are Scalable Learners and Thinkers. arXiv:2507.02092, 2025.
89. Du Y., Mordatch I. Implicit Generation and Modeling with Energy-Based Models. *NeurIPS 32*, 2019.
90. Nijkamp E., Hill M., Zhu S.-C., Wu Y. N. On Learning Non-Convergent Non-Persistent Short-Run MCMC Toward Energy-Based Model. *NeurIPS 32*, 2019.
91. Chen R. T. Q., Rubanova Y., Bettencourt J., Duvenaud D. Neural Ordinary Differential Equations. *NeurIPS 31*, 2018.
92. Mangalam K., Fan H., Li Y., et al. Reversible Vision Transformers. *CVPR*, 2022.
93. Khalil H. K. *Nonlinear Systems* (3rd ed.). Prentice Hall, 2002.
94. Heusel M., Ramsauer H., Unterthiner T., et al. GANs Trained by a Two Time-Scale Update Rule Converge to a Local Nash Equilibrium (FID). *NeurIPS 30*, 2017.
95. Saharia C., Chan W., Chang H., et al. Palette: Image-to-Image Diffusion Models. *SIGGRAPH*, 2022.
96. Ruiz N., Li Y., Jampani V., et al. DreamBooth: Fine Tuning Text-to-Image Diffusion Models for Subject-Driven Generation. *CVPR*, 2023.
97. Hu E. J., Shen Y., Wallis P., et al. LoRA: Low-Rank Adaptation of Large Language Models. *ICLR*, 2022.
98. Zhang L., Rao A., Agrawala M. Adding Conditional Control to Text-to-Image Diffusion Models (ControlNet). *ICCV*, 2023.
99. Hertz A., Voynov A., Fruchter S., Cohen-Or D. Style Aligned Image Generation via Shared Attention. *CVPR*, 2024.
100. Marr D. *Vision: A Computational Investigation into the Human Representation and Processing of Visual Information*. W. H. Freeman, 1982.
101. Radford A., Kim J. W., Hallacy C., et al. Learning Transferable Visual Models From Natural Language Supervision (CLIP). *ICML*, 2021.
102. Hessel J., Holtzman A., Forbes M., Le Bras R., Choi Y. CLIPScore: A Reference-free Evaluation Metric for Image Captioning. *EMNLP*, pp. 7514–7528, 2021. DOI: 10.18653/v1/2021.emnlp-main.595.
103. Otani M., Togashi R., Sawai Y., et al. Toward Verifiable and Reproducible Human Evaluation for Text-to-Image Generation. *CVPR*, pp. 14277–14286, 2023.
104. Thrush T., Jiang R., Bartolo M., et al. Winoground: Probing Vision and Language Models for Visio-Linguistic Compositionality. *CVPR*, pp. 5238–5248, 2022.

105. Goodfellow I., Bengio Y., Courville A. *Deep Learning*. MIT Press, 2016.
106. Shaw P., Uszkoreit J., Vaswani A. Self-Attention with Relative Position Representations. *NAACL*, 2018.
107. Su J., Ahmed M., Lu Y., et al. RoFormer: Enhanced Transformer with Rotary Position Embedding. *Neurocomputing* 568, 2024 (arXiv:2104.09864, 2021).
108. Rajbhandari S., Rasley J., Ruwase O., He Y. ZeRO: Memory Optimizations Toward Training Trillion Parameter Models. *SC20*, 2020.
109. Korthikanti V., Casper J., Lym S., McAfee L., Andersch M., Shoeybi M., Catanzaro B. Reducing Activation Recomputation in Large Transformer Models. arXiv:2205.05198, 2022.
110. MacKay M., Vicol P., Ba J., Grosse R. B. Reversible Recurrent Neural Networks. *NeurIPS 31*, 2018.
111. Behrmann J., Grathwohl W., Chen R. T. Q., Duvenaud D., Jacobsen J.-H. Invertible Residual Networks (i-ResNet). *ICML*, 2019.
112. Behrmann J., Vicol P., Wang K.-C., Grosse R., Jacobsen J.-H. Understanding and Mitigating Exploding Inverses in Invertible Neural Networks. *AISTATS*, 2021.
113. Maclaurin D., Duvenaud D., Adams R. P. Gradient-Based Hyperparameter Optimization Through Reversible Learning. *ICML*, 2015.
114. Wallace B., Gokul A., Ermon S., Naik N. End-to-End Diffusion Latent Optimization Improves Classifier Guidance (DOODL). *ICCV*, 2023.
115. Wallace B., Gokul A., Naik N. EDICT: Exact Diffusion Inversion via Coupled Transformations. *CVPR*, 2023.
116. Zhuang J., Dvornek N. C., Tatikonda S., Duncan J. S. MALI: A Memory-Efficient and Reverse-Accurate Integrator for Neural ODEs. *ICLR*, 2021.
117. Prabhudesai M., Goyal A., Pathak D., Fragkiadaki K. Aligning Text-to-Image Diffusion Models with Reward Backpropagation (AlignProp). arXiv:2310.03739, 2023.
118. Clark K., Vicol P., Swersky K., Fleet D. J. Directly Fine-Tuning Diffusion Models on Differentiable Rewards (DRaFT). *ICLR*, 2024.
119. Salimans T., Ho J. Progressive Distillation for Fast Sampling of Diffusion Models. *ICLR*, 2022.
120. Efron B. Bootstrap Methods: Another Look at the Jackknife. *The Annals of Statistics* 7(1):1–26, 1979.
121. Cameron A. C., Gelbach J. B., Miller D. L. Bootstrap-Based Improvements for Inference with Clustered Errors. *Review of Economics and Statistics* 90(3):414–427, 2008.
122. Westfall P. H., Young S. S. *Resampling-Based Multiple Testing: Examples and Methods for p-Value Adjustment*. Wiley, 1993.
123. Romano J. P., Wolf M. Exact and Approximate Stepdown Methods for Multiple Hypothesis Testing. *Econometrica* 73(4):1237–1282, 2005.
124. Srivastava N., Mansimov E., Salakhutdinov R. Unsupervised Learning of Video Representations using LSTMs (Moving MNIST). *ICML*, 2015.
125. Kuhn H. W. The Hungarian Method for the Assignment Problem. *Naval Research Logistics Quarterly* 2(1–2):83–97, 1955. DOI: 10.1002/nav.3800020109.

126. Zhang J., Zheng Y., Qi D. Deep Spatio-Temporal Residual Networks for Citywide Crowd Flows Prediction (TaxiBJ). *AAAI*, 2017.
127. Wang Z., Bovik A. C., Sheikh H. R., Simoncelli E. P. Image Quality Assessment: From Error Visibility to Structural Similarity. *IEEE Transactions on Image Processing* 13(4):600–612, 2004. DOI: 10.1109/TIP.2003.819861.
128. Zhang R., Isola P., Efros A. A., Shechtman E., Wang O. The Unreasonable Effectiveness of Deep Features as a Perceptual Metric. *CVPR*, 2018.
129. Unterthiner T., van Steenkiste S., Kurach K., et al. Towards Accurate Generative Models of Video: A New Metric and Challenges. arXiv:1812.01717, 2019.
130. Denton E., Fergus R. Stochastic Video Generation with a Learned Prior (SVG). *ICML*, 2018.
131. Lee A. X., Zhang R., Ebert F., et al. Stochastic Adversarial Video Prediction (SAVP). arXiv:1804.01523, 2018.
132. Alonso E., Jelley A., Micheli V., et al. Diffusion for World Modeling: Visual Details Matter in Atari (DIAMOND). *NeurIPS 37*, 2024.

Supplementary Appendix — Chapter 4 Configuration and Evidence Registry

Purpose and reading rules

This is the publication-facing appendix for Chapter 4. It replaces experiment chronology with a curated registry of completed configurations, inferential families, resource fields, and evidence bindings. It must be read with three rules:

1. an arm-level score is descriptive unless a paired comparison and interval are shown;
2. rows with different comparison licences are not cells of one causal factorial; and
3. **NOT_EXECUTED / OUT_OF_SCOPE** means that the frozen programme closed without that cell. It is not a pending result and cannot support a claim.

Effects follow the convention printed above each table. Clip-cluster intervals condition on a trained model; training-seed summaries use training seeds as units. The primary evidence remains the immutable result artifacts identified at the end of this appendix.

A. Comparison licences

Licence	Permitted reading	Prohibited reading
MATCHED	effect of the registered package pair at the named matched budget and interface	universal architectural superiority
NEAR_MATCHED	direction under the disclosed small budget difference	exact equal-budget causal effect
MATCHED_CAPACITY	mechanism comparison with closely matched backbone capacity and shared context	identical objectives or inference work
WHOLE_CONFIGURATION	performance of the complete executed configuration	effect of one co-changing component
DEVELOPMENT_FACTORIAL	seed-resolved effect and interaction on the adaptively used pool	untouched confirmation
DEVELOPMENT_DIAGNOSTIC	mechanism diagnosis with all stated confounds retained	claim-grade causal law
ROBUSTNESS_ONLY	sensitivity of already selected contrasts to the named intervention	new model selection or broader generalization
REGISTERED_REPLICATION	outcome-independent replication verdict for the frozen prediction	exploratory reinterpretation after failure
PRIVILEGED_REFERENCE	diagnostic value of explicit addressing or additional information	token-matched model ranking

Licence	Permitted reading	Prohibited reading
EXTERNAL_BOUNDARY	scope behavior on a changed task and endpoint set	direct replication of LoopMom geometry
DESCRIPTIVE_BOUNDARY	competence or failure outside the central mechanism	equivalence, superiority, or mechanism confirmation

B. Complete observed LoopMom configuration grid

All scores below are foreground MSE over the 152-frame autoregressive rollout after the 48-frame ground-truth warm-up; lower is better. Multi-seed entries show the mean and range over the executed files named by the seed-coverage column; the four E4b cells were recomputed from the frozen input artifacts so all five seeds are represented. They are descriptive receipts, not substitutes for the paired, seed-resolved effects in Sections D–G. Resolution depth counts spatial levels; `strided-flat` has one spatial level but two temporal rates. Except where stated, the regime is B16×30k, bf16, EMA 0.999.

The **configuration row ID** is the stable one-to-one join key between Tables B.1 and B.2; repeated arm names under different execution regimes receive distinct row IDs.

Table B.1 — Package geometry and interface fields.

ID	Arm and package	Head	Reach	Context	Total	Spatial / rate depth
LM01	`hier-short`: 6 coarse + 6 fine	diffusion	6	480	800	2 / 1
LM02	`flat-short`: 8 fine	diffusion	8	512	832	1 / 1
LM03	`flat-short-reg`: 8 fine	regression	8	512	832	1 / 1
LM04	`hier-s2-min`: 24 stride-2 coarse + 2 fine	diffusion	48	512	800	2 / 2
LM05	`hier-s2-min-reg`	regression	48	512	800	2 / 2
LM06	`spat18`: 18 coarse + 6 fine	diffusion	18	672	992	2 / 1
LM07	`spat18-reg`	regression	18	672	992	2 / 1
LM08	`flat-min`: 14 fine	diffusion	14	896	1,216	1 / 1

ID	Arm and package	Head	Reach	Context	Total	Spatial / rate depth
LM09	`hier-min`: 48 coarse + 2 fine	diffusion	48	896	1,216	2 / 1
LM10	`strided-flat`: 11 stride-4 fine anchors + 6 fine	diffusion	48	1,088	1,408	1 / 2
LM11	`strided-flat-reg`	regression	48	1,088	1,408	1 / 2
LM12	`flat-budget`: 18 fine	diffusion	18	1,152	1,472	1 / 1
LM13	`flat-budget`	diffusion	18	1,152	1,472	1 / 1
LM14	`reg-flat`	regression	18	1,152	1,472	1 / 1
LM15	`hier-long`: 48 coarse + 6 fine	diffusion	48	1,152	1,472	2 / 1
LM16	`hier-long`	diffusion	48	1,152	1,472	2 / 1
LM17	`reg-long`	regression	48	1,152	1,472	2 / 1
LM18	`hier3`: 48 top + 24 coarse + 9 fine	diffusion	48	1,152	1,488	3 / 1
LM19	`flat-c1`: 28 fine	diffusion	28	1,792	2,112	1 / 1
LM20	`hier-c1`: 48 coarse + 16 fine	diffusion	48	1,792	2,112	2 / 1
LM21	`flat-c2`: 38 fine	diffusion	38	2,432	2,752	1 / 1
LM22	`hier-c2`: 48 coarse + 26 fine	diffusion	48	2,432	2,752	2 / 1
LM23	`flat-c2`	diffusion	38	2,432	2,752	1 / 1
LM24	`hier-c2`	diffusion	48	2,432	2,752	2 / 1
LM25	`flat-long`: 48 fine	diffusion	48	3,072	3,392	1 / 1
LM26	`hier-rich`: 48 coarse + 36 fine	diffusio	48	3,072	3,392	2 / 1

ID	Arm and package	Head	Reach	Context	Total	Spatial / rate depth
		n				

Table B.2 — Execution, outcome, and evidence fields.

ID	Temporal / spatial factor	Executed seeds	Regime	Descriptive fg-MSE	Sharpness	Licence / role
LM01	1 / 2	0–1	B16×30k	0.2258 (0.2257–0.2260)	0.0394	near-matched lower reference
LM02	1 / 1	0–1	B16×30k	0.2215 (0.2206–0.2224)	0.0426	lower/B1 comparator
LM03	1 / 1	0	B16×30k	0.2205	0.0373	B1 regression comparator
LM04	2 / 2	0–1	B16×30k	0.1881 (0.1869–0.1893)	0.0712	whole configuration B1
LM05	2 / 2	0	B16×30k	0.1566	0.0831	whole configuration B1
LM06	1 / 2	0	B16×30k	0.2120	0.0498	fixed-span diagnostic
LM07	1 / 2	0	B16×30k	0.2008	0.0480	fixed-span diagnostic
LM08	1 / 1	0–1	B16×30k	0.2104 (0.2102–0.2106)	0.0515	matched 896 comparator
LM09	1 / 2	0–1	B16×30k	0.1725 (0.1706–0.1744)	0.0848	matched 896 candidate
LM10	4 / 1	0–4	B16×30k	0.1638 (0.1622–0.1652)	0.0944	near-matched package factorial
LM11	4 / 1	0–4	B16×30k	0.1657 (0.1574–0.1745)	0.0823	near-matched package factorial
LM12	1 / 1	0–2	B16×30k	0.2042 (0.2038–0.2046)	0.0582	matched 1,152 comparator
LM13	1 / 1	0	B8×60k	0.2032	0.0592	optimizer-regime diagnostic
LM14	1 / 1	0–1	B16×30k	0.2009 (0.2004–0.2015)	0.0514	deterministic flat reference
LM15	1 / 2	0–4	B16×30k	0.1736 (0.1682–0.1848)	0.0836	matched 1,152 candidate

ID	Temporal / spatial factor	Executed seeds	Regime	Descriptive fg-MSE	Sharpness	Licence / role
LM16	1 / 2	0	B8×60k	0.1666	0.0899	optimizer-regime diagnostic
LM17	1 / 2	0–4	B16×30k	0.1632 (0.1503–0.1870)	0.0777	package factorial spatial arm
LM18	1 / 2×2	0	B16×30k	0.2044	0.0564	depth-plus-objective/allocation diagnostic
LM19	1 / 1	0	B16×30k	0.1876	0.0737	matched frontier comparator
LM20	1 / 2	0	B16×30k	0.1799	0.0779	matched frontier candidate
LM21	1 / 1	0	B16×30k	0.1703	0.0893	matched frontier comparator
LM22	1 / 2	0	B16×30k	0.1820	0.0771	matched frontier candidate
LM23	1 / 1	0	B8×60k	0.1708	0.0889	matched optimizer-regime comparator
LM24	1 / 2	0	B8×60k	0.1785	0.0795	matched optimizer-regime candidate
LM25	1 / 1	0–1	B8×60k	0.1572 (0.1564–0.1580)	0.0993	matched equal-reach comparator
LM26	1 / 2	0–1	B8×60k	0.1691 (0.1687–0.1695)	0.0893	matched equal-budget hierarchy

Structurally absent cells

Proposed cell	Status	Consequence
`flat-320`	**NOT_EXECUTED / OUT_OF_SCOPE**	no 320-token frontier point is claimed
`hier-s4-min`	**NOT_EXECUTED / OUT_OF_SCOPE**	no stride-4 coarse “edge law” is claimed
`hier3-reg`	**NOT_EXECUTED / OUT_OF_SCOPE**	no cross-head third-level conclusion is claimed
E5b/E5c localization	**NOT_AUTHORIZED after E5a**	the failed late-inversion replication is terminal
E9	**SKIPPED_POST_FREEZE_NO_INCREMENTAL_UTILITY**	no further GPU evidence is required for the present claims
B1 fixed-target control	**NOT_EXECUTED / OUT_OF_SCOPE**	B1 remains permanently a whole-configuration result

C. Resource and protocol accounting

The standard rollout predictor has approximately 22.19 M trainable parameters. The third-level probe adds approximately 0.30 M level-specific I/O parameters; its frozen top-level autoencoder tap is a separately disclosed component. B16×30k and B8×60k both process approximately 480,000 training examples, but they are not the same optimizer regime.

Each spatial token contains 16 frozen-codec coefficients. The exact context-only array payload and the width-384 embedding materialization are:

Package	Tokens	Latent fp32	Latent fp16/bf16	Width-384 bf16 embeddings
48 dense fine frames	3,072	192 KiB	96 KiB	2.250 MiB
48 coarse + 6 fine	1,152	72 KiB	36 KiB	0.844 MiB
48 coarse + 2 fine	896	56 KiB	28 KiB	0.656 MiB

These are context-state payloads, not peak VRAM. They exclude targets, attention/MLP intermediates, allocator overhead, parameters, optimizer state and training activations; fp32 embeddings double the bf16 values.

Regime / head	Batch	Updates	Approx. examples	EMA	NFE per rollout step	NFE per 38-step / 152-frame rollout	Interpretation
B16×30k diffusion	16	30,000	480,000	0.999	16 default	608 default	primary frontier regime
B8×60k diffusion	8	60,000	480,000	0.999	16 default	608 default	matched-example optimizer-regime control
B16×30k regression	16	30,000	480,000	0.999	1	38	deterministic rollout control

Measured step time and peak VRAM were not captured for every arm under one profiling protocol. Unmeasured fields are therefore reported as **NR**, not estimated.

Arm	Context / total tokens	Measured seconds per training step	Measured peak VRAM	Scope
`hier-s2-min`	512 / 800	0.19–0.23	3.8 GB	B16 bf16 chain logs

Arm	Context / total tokens	Measured seconds per training step	Measured peak VRAM	Scope
`strided-flat`	1,088 / 1,408	0.37–0.42	6.3 GB	B16 bf16 chain logs
`hier3`	1,152 / 1,488	0.41–0.48	6.5 GB	B16 bf16 chain logs
`flat-c2`	2,432 / 2,752	0.82–0.84	11.8 GB	B16 bf16 chain logs
all other arms	as in Section B	NR	NR	no cross-arm estimate is substituted

Selected programme-level GPU charges that have independently recorded totals are E2 successful evaluations (4.2169 h, plus approximately 0.01 h conservatively charged for an aborted pre-metric attempt), E4a's two new regression cells (6.1228 h), E4b seeds 3–4 (24.9922 h), and E6's six training/evaluation cells (20.5127 h). These are programme accounting receipts, not comparable per-arm runtime benchmarks.

D. Untouched frontier family

Effects are flat loss minus hierarchical loss, so positive values favor hierarchy. All intervals belong to one studentized max-statistic clip-cluster family (critical value 2.741).

Frozen contrast	Budget and regime	Seed	Effect	Simultaneous 95% CI	Decision
`hier-short` vs `flat-short`	480 vs 512, B16×30k	0	−0.0038	[−0.0081,+0.0005]	unresolved near-match
`hier-short` vs `flat-short`	480 vs 512, B16×30k	1	−0.0060	[−0.0105,−0.0015]	flat favored; near-match
`hier-min` vs `flat-min`	896, B16×30k	0	+0.0474	[+0.0305,+0.0642]	hierarchy confirmed
`hier-min` vs `flat-min`	896, B16×30k	1	+0.0436	[+0.0280,+0.0592]	hierarchy confirmed
`hier-long` vs `flat-budget`	1,152, B16×30k	0	+0.0195	[+0.0070,+0.0320]	hierarchy confirmed
`hier-long` vs `flat-budget`	1,152, B16×30k	1	+0.0389	[+0.0228,+0.0549]	hierarchy confirmed
`hier-long` vs `flat-budget`	1,152, B16×30k	2	+0.0307	[+0.0159,+0.0455]	hierarchy confirmed
`hier-c1` vs `flat-c1`	1,792, B16×30k	0	+0.0084	[−0.0013,+0.0181]	unresolved

Frozen contrast	Budget and regime	Seed	Effect	Simultaneous 95% CI	Decision
`hier-c2` vs `flat-c2`	2,432, B16×30k	0	−0.0150	[−0.0260,−0.0039]	flat confirmed
`hier-c2` vs `flat-c2`	2,432, B8×60k	0	−0.0122	[−0.0213,−0.0032]	flat confirmed; separate optimizer regime
`hier-rich` vs `flat-long`	3,072, B8×60k	0	−0.0129	[−0.0217,−0.0041]	flat confirmed
`hier-rich` vs `flat-long`	3,072, B8×60k	1	−0.0134	[−0.0215,−0.0053]	flat confirmed

The exact pair-derived reach effects for `hier-min` versus `flat-min` are +0.0980 [+0.0788,+0.1179] and +0.0914 [+0.0736,+0.1098] at seeds 0/1. For B1 versus `flat-short`, the whole-configuration reach-band effects are +0.0692 [+0.0543,+0.0845] and +0.0743 [+0.0588,+0.0899].

E. Five-seed head × package factorial

Positive package effects favor `strided-flat` over `hier-long`. The two packages have the same nominal reach but 1,088 versus 1,152 context tokens; the deficit favors the temporal package.

The absolute per-seed cells below are foreground MSE over the complete 152-frame rollout. They make the factorial auditable without forcing reconstruction from effects.

Seed	Diffusion temporal (`strided-flat`)	Diffusion spatial (`hier-long`)	Regression temporal (`strided-flat-reg`)	Regression spatial (`reg-long`)
0	0.1652	0.1848	0.1574	0.1682
1	0.1644	0.1690	0.1606	0.1503
2	0.1636	0.1747	0.1736	0.1528
3	0.1638	0.1713	0.1622	0.1870
4	0.1622	0.1682	0.1745	0.1579

Seed	Diffusion temporal effect	Regression temporal effect	Head × package interaction
0	+0.0197 [+0.0143,+0.0252]	+0.0107 [+0.0062,+0.0158]	−0.0089 [−0.0151,−0.0025]
1	+0.0046 [+0.0007,+0.0084]	−0.0104 [−0.0146,−0.0062]	−0.0150 [−0.0199,−0.0104]
2	+0.0111 [+0.0070,+0.0151]	−0.0208 [−0.0270,−0.0150]	−0.0319 [−0.0401,−0.0245]

Seed	Diffusion temporal effect	Regression temporal effect	Head × package interaction
3	+0.0075 [+0.0037,+0.0114]	+0.0248 [+0.0181,+0.0323]	+0.0173 [+0.0106,+0.0245]
4	+0.0060 [+0.0027,+0.0092]	−0.0166 [−0.0229,−0.0108]	−0.0226 [−0.0297,−0.0160]

Estimand	Across-seed mean	SD	t95 interval	Terminal reading
diffusion package effect	+0.0098	0.0060	[+0.0023,+0.0173]	temporal package stable across five tested seeds
regression package effect	−0.0024	0.0195	[−0.0266,+0.0217]	heterogeneous; not equivalence
head × package interaction	−0.0122	0.0186	[−0.0353,+0.0109]	sign-changing; no directional head law

F. Diagnostic context-form cells

Diagnostic	Result	Licence and limitation
fixed 18-frame spatial abstraction, diffusion	`flat-budget` minus `spat18` = −0.0082 [−0.0115,−0.0050]	spatial coarsening saves 42% of context tokens but has a small diffusion cost
fixed 18-frame spatial abstraction, regression	`reg-flat` minus `spat18-reg` = +0.0008 [−0.0013,+0.0029]	unresolved at one training seed; not equivalence
depth-plus-objective/allocation	two-level `hier-long` error minus three-level `hier3` error = −0.0196 [−0.0248,−0.0146]	the three-level probe is worse, but target loss allocation, optimization load, stream allocation and top-level floor are inseparable; not “depth hurts”
blind coarse stream	ALL fg-MSE rises to 0.2236; hard re-entry increase +0.073 versus +0.022 at h1–8	zeroing is out of distribution; direction supports retrieval use but magnitude is not information accounting
blind fine stream	h1–8 fg-MSE 0.2427; sharpness 0.0086	renderer collapse plus OOD brittleness; no clean quantitative attribution
blind `hier3` top stream	ALL increase +0.0035	tested top stream contributes little under this allocation; not a general top-level null

G. Sampler/NFE robustness family

Positive effects use the registered direction for each contrast: hierarchy for 896/1,152, temporal packaging for 1,088-vs-1,152, and flat context for the 2,432 inversion.

Contrast	NFE/step	Sampler seed	NFE/clip	Effect	Simultaneous 95% CI
896 reach	8	0	304	+0.0478	[+0.0323,+0.0634]
896 reach	16	0	608	+0.0465	[+0.0310,+0.0621]
896 reach	32	0	1,216	+0.0471	[+0.0317,+0.0625]
896 reach	16	1	608	+0.0482	[+0.0325,+0.0638]
896 reach	16	2	608	+0.0466	[+0.0314,+0.0618]
1,152 interior	8	0	304	+0.0152	[+0.0045,+0.0259]
1,152 interior	16	0	608	+0.0146	[+0.0041,+0.0251]
1,152 interior	32	0	1,216	+0.0140	[+0.0036,+0.0245]
1,152 interior	16	1	608	+0.0201	[+0.0086,+0.0315]
1,152 interior	16	2	608	+0.0200	[+0.0087,+0.0313]
package shape	8	0	304	+0.0276	[+0.0171,+0.0381]
package shape	16	0	608	+0.0283	[+0.0172,+0.0394]
package shape	32	0	1,216	+0.0292	[+0.0182,+0.0403]
package shape	16	1	608	+0.0251	[+0.0160,+0.0342]
package shape	16	2	608	+0.0221	[+0.0133,+0.0309]
2,432 inversion	8	0	304	+0.0115	[+0.0016,+0.0214]
2,432 inversion	16	0	608	+0.0117	[+0.0018,+0.0217]
2,432 inversion	32	0	1,216	+0.0122	[+0.0022,+0.0221]
2,432 inversion	16	1	608	+0.0098	[−0.0001,+0.0196]
2,432 inversion	16	2	608	+0.0077	[−0.0013,+0.0167]

Terminal verdict: **DIRECTIONALLY_ROBUST**. This is checkpoint-only robustness conditional on training seed 0, not training-seed or dataset robustness.

H. Alternate-codec robustness family

Codec	Contrast	Effect	Simultaneous 95% CI
original	896 reach	+0.0494	[+0.0339,+0.0649]
original	1,152 interior	+0.0283	[+0.0169,+0.0397]

Codec	Contrast	Effect	Simultaneous 95% CI
original	package shape	+0.0253	[+0.0163,+0.0343]
original	2,432 inversion	+0.0150	[+0.0065,+0.0235]
alternate	896 reach	+0.0521	[+0.0374,+0.0669]
alternate	1,152 interior	+0.0439	[+0.0310,+0.0569]
alternate	package shape	+0.0112	[+0.0039,+0.0184]
alternate	2,432 inversion	+0.0079	[−0.0006,+0.0165]

Terminal verdict: **CODEC_DIRECTIONALLY_ROBUST**. The alternate row changes codec weights, reconstruction, latent geometry and normalization together and remains conditional on predictor seed 0.

I. Registered negative, privileged reference, and external boundary

I.1 Self-fed reliability replication

Training seed	Early h1–24	Late h61–256
0	+0.0204 [+0.0133,+0.0279]	−0.0064 [−0.0095,−0.0032]
1	+0.0082 [+0.0035,+0.0133]	+0.0074 [+0.0038,+0.0112]
2	+0.0230 [+0.0150,+0.0315]	+0.0087 [+0.0035,+0.0139]

Terminal verdict: **NOT_REPLICATED**. No stable late trust boundary is established.

I.2 Privileged pose-indexed raw-memory family

Effect	Estimate	Simultaneous 95% CI
raw K14 minus raw K48	+0.0723	[+0.0548,+0.0898]
raw K38 minus raw K48	+0.0210	[+0.0096,+0.0325]
`hier-min` minus raw K48	+0.1219	[+0.1031,+0.1407]
`hier-long` minus raw K48	+0.1368	[+0.1190,+0.1545]
`strided-flat` minus raw K48	+0.1134	[+0.0944,+0.1324]
`flat-c2` minus raw K48	+0.1310	[+0.1122,+0.1498]

Terminal verdict: **RAW_ACCESS_CEILING_CI_CLEAN**. Exact future poses and raw warm-up pixels make this a privileged reference rather than a neural baseline.

I.3 Persistent-object long Moving-MNIST

For lower-is-better endpoints (foreground MSE, union MSE, trajectory error), effects are flat minus hierarchy. For higher-is-better endpoints (identity accuracy, coverage), effects are hierarchy minus flat. Positive therefore favors hierarchy for every column without changing any endpoint denominator.

Seed	Foreground MSE	Union MSE	Trajectory error	Identity accuracy	Coverage
0	+0.0036 [−0.0074,+0.0146]	+0.0102 [+0.0019,+0.0185]	+2.4786 [+0.2130,+4.7443]	−0.0762 [−0.1106,−0.0418]	+0.0304 [+0.0016,+0.0591]
1	−0.0031 [−0.0127,+0.0065]	+0.0122 [+0.0052,+0.0192]	+1.4223 [−1.0646,+3.9092]	−0.0561 [−0.0934,−0.0188]	+0.0159 [−0.0163,+0.0482]
2	−0.0024 [−0.0131,+0.0083]	+0.0169 [+0.0093,+0.0245]	+4.1325 [+1.5271,+6.7380]	−0.0647 [−0.0955,−0.0338]	+0.0498 [+0.0161,+0.0834]

Terminal verdict: **MIXED_BOUNDARY**. Positive favors hierarchy. Hierarchy better preserves support and continuity; flat context better preserves identity; foreground-only error is unresolved and neither system solves the task.

J. Evidence-to-artifact bindings

Study	Frozen result artifact	SHA-256
E2 untouched confirmation	`artifacts/confirmation_e2/results.json`	`85d01085e9ac074cd099e7b611101b30b7b7112b1f0230ea9163d9825cf2166e`
E4b head × package	`artifacts/e4b_head_package/results.json`	`eb917d948d852d022b872532b826bdb20fc1f17ecfddb55a76446f1821bc9e89`
E5a replication	`artifacts/e5a_trust_replication/results.json`	`c38244c207c24c17d6081a2dc75004b6ae96c63c7814d1cfdfbd87bb8ab5414b`
E7c sampler/NFE	`artifacts/e7c_sampler_nfe/results.json`	`93eef5069598b099f62013384e6d91978d7c9996f8fd4f67ab790486758054e6`
E7a alternate codec	`artifacts/e7a_codec_robustness/results.json`	`3f113628babb58cd9adf5223f04a28cc7bb54b59a451b6f5f9aa4ac8d2dd7173`
E8a pose mosaic	`artifacts/e8a_pose_mosaic/results.json`	`74b9357f950fbfa4e94160852c53205398f8efad8c2c453b1d8a726be22148be`

Study	Frozen result artifact	SHA-256
E6 persistent objects	`artifacts/phasec_v2/results.json`	`75a628ca6f2fa87e74e67bbe7b95d4acee6e0f35969d28fe97e72b0b40e981c7`
E6 completion validator	`artifacts/phasec_v2/completion_validation.json`	`091206aa6e2b1a9cf39f9cd4d921a2da8611216f8ecaf56e9bccb48d454915d8`

The hash in a release manifest is the authority if this appendix and a later public archive ever disagree. Dashboard records are mirrors; manuscript conclusions are regenerated from the frozen local artifacts.

K. Development mechanism and inference-allocation receipt

The corrected mechanism receipt executes regression and diffusion only. Although the harness also prints the parameter count of an instantiated 7.28 M energy model, its mode list is `('reg','diff')`; no energy result from that harness is admissible. Regression (7.27 M parameters) was trained for 6,000 steps and diffusion (7.53 M) for 8,000 steps with the same six-frame, two-level context interface. The principal held-out table uses six batches of 48 records and eight candidates per record.

Executed head	Best-of-8 fg-MSE, all	Easy	Hard novel strip	Mean over 8 candidates	Best-of-8 fg-sharpness
regression with MC dropout	0.0664	0.0232	0.1808	0.0714	0.1591
diffusion, v-prediction + DDIM-16	0.0512	0.0120	0.1549	0.0640	0.1886
persistence reference	0.2367	—	—	—	0.0515

One regression candidate is one MC-dropout forward. One diffusion candidate is the declared number of DDIM network evaluations. Consequently, best-of-8 does **not** equalize total inference work:

Per-candidate NFE	Regression best-of-8 fg-MSE	Diffusion best-of-8 fg-MSE	Total regression / diffusion evaluations per record
4	0.0680	0.0546	8 / 32
8	0.0680	0.0514	8 / 64
16	0.0680	0.0503	8 / 128

This NFE sweep uses two batches of 48 records, so its 16-NFE value is not substituted for the six-batch main-table value. The licensed conclusion is matched-capacity/interface coverage plus diffusion inference-allocation sensitivity, not equal-total-work superiority.

Receipt	SHA-256	Provenance class
`logs_rhcp/step1_mech_clean2.log`	`5333f8e8b74b38c6e9608b11f82e4f2494fa3425b31be75e1c6877cb622953e8`	hash-listed legacy log; not a content-addressed RunSpec result JSON/NPZ

L. Energy-based capability receipts

The energy-based evidence is a separate official-code adaptation, not a third matched-capacity cell in Section K. Both S1 and S2 use the paper's `xxs` shape (width 384, 6 layers, 6 heads, FFN multiplier 4), 16 context frames, 14.66 M parameters, effective fresh batch 128, 20,000 steps, 5,000-step warm-up, fp32, and one RTX 4060 Ti 16 GB. Their purpose is to separate energy-landscape ordering from candidate-descent reachability.

Recipe	Landscape-ordering receipt	Optimization / scale receipt	Descent-output receipt	Terminal reading
S2, fixed $\alpha = 15.97$	batch mean has lower energy than target on 21/21 probes; post-warm-up gap approximately 0.6–1.2	loss approximately 0.597	cold $d_{\text{tgt}} = 1.264$–1.292; fg-sharpness 0.0081–0.0144	persistently misordered and unstructured
S1, learnable α: $23.95 \rightarrow 33.27$	target lowest on 15 consecutive probes from 6,000–20,000 steps; target-below-mean gap +0.22 to +3.09	final loss 0.3614	cold $d_{\text{tgt}} = 1.123$–1.166; cold fg-sharpness maximum 0.0345; paper-style best-of-4 $d_{\text{tgt}} = 1.186$–1.260 and sharpness 0.0102–0.0154	ordering repaired; reachability still fails at tested scale

The structured-output threshold was approximately 0.08 and the AE round-trip sharpness reference was approximately 0.24. These values scope the observed collapse; they do not prove an impossibility result for larger models, longer training, or different initializations.

Receipt	SHA-256	Provenance class
`logs_rhcp/ebt_scaled_s1.log`	`d1794167a4e9d6640cfd2c2ddd44965a7a7c71a572cdff4c823c45c2287e3365`	hash-listed legacy log; not a content-addressed RunSpec result JSON/NPZ
`logs_rhcp/ebt_scaled_s2.log`	`763221c3fe6bffea9d82270a768c1f0ea9db770edbdd9b88db89fd4748bd0568`	hash-listed legacy log; not a content-addressed RunSpec result JSON/NPZ

M. Chapter 2 reversible-memory and numerical-validation provenance

The retained end-to-end training-loop frontier was measured on an RTX 4060 Ti 16 GB with encoder, core, decoder, and Adam active (batch 32, 64×64 resolution, three levels). The asterisk denotes WDDM shared-memory spill beyond physical VRAM, not a valid in-core GPU operating point.

Horizon K	BPTT MB	Checkpoint MB	Reversible MB	BPTT ms	Checkpoint ms	Reversible ms
10	3,809	1,354	1,065	549	322	257
20	6,592	1,391	1,078	399	544	479
40	12,162	1,471	1,091	740	1,028	882
80	23,305*	1,637	1,125	43,797*	3,131	2,556
120	OOM	1,801	1,152	—	3,960	2,760
160	OOM	1,967	1,176	—	4,066	3,362

The defensible description is an approximately horizon-independent reversible peak activation-tape footprint over the tested range, with a modest measured edge over the implemented per-step checkpoint comparator—not a universal constant-memory or universal speed theorem.

The separate energy-descent inner-loop panel shows why reversibility is not automatically useful everywhere. At $K = 128$, checkpointing uses 5.296 GB and 7.85 s/step, whereas reversible replay uses 5.282 GB and 15.37 s/step: only 14 MB (0.26%) is saved because other tensors dominate. The same receipt reports CPU-fp64 gradient cosine greater than 0.999999 between reversible and checkpointed variants. This is a numerical check for that implementation, not a general proof.

Receipt / source	SHA-256	Provenance limitation
`logs_rhcp/panelA_memfrontier.md`	`1349487ab314faac443dfb296269d88fa26a8a1a92d75d4c48256e4155bde81c`	measured legacy receipt; not a content-addressed result artifact
`logs_rhcp/mem_panel.md`	`8d863d8015770278d40767aac5ea994701e42e21accadce8b377723a93fe13c5`	measured legacy receipt; contains the inner-loop gradient-cosine statement
`hvp_rev/theory.py`	`0928c9b42c6f719048cfb872251650cf3fe5510232f887cfffe4f654a30fa0bd`	executable numerical-check source only; no standalone frozen T1–T4 output artifact was found

The absence of a standalone frozen T1–T4 output file is a review-edition provenance limitation, not permission to reconstruct numerical results from prose. A future public release may add such a receipt after rerunning the fixed source, but the present dissertation must cite only the measured logs and source status above.