


CSM V3 — WOOD UPPER DECK V1.0 — DRILLING DRAWING
320 × 260 × 12 mm Baltic Birch Plywood

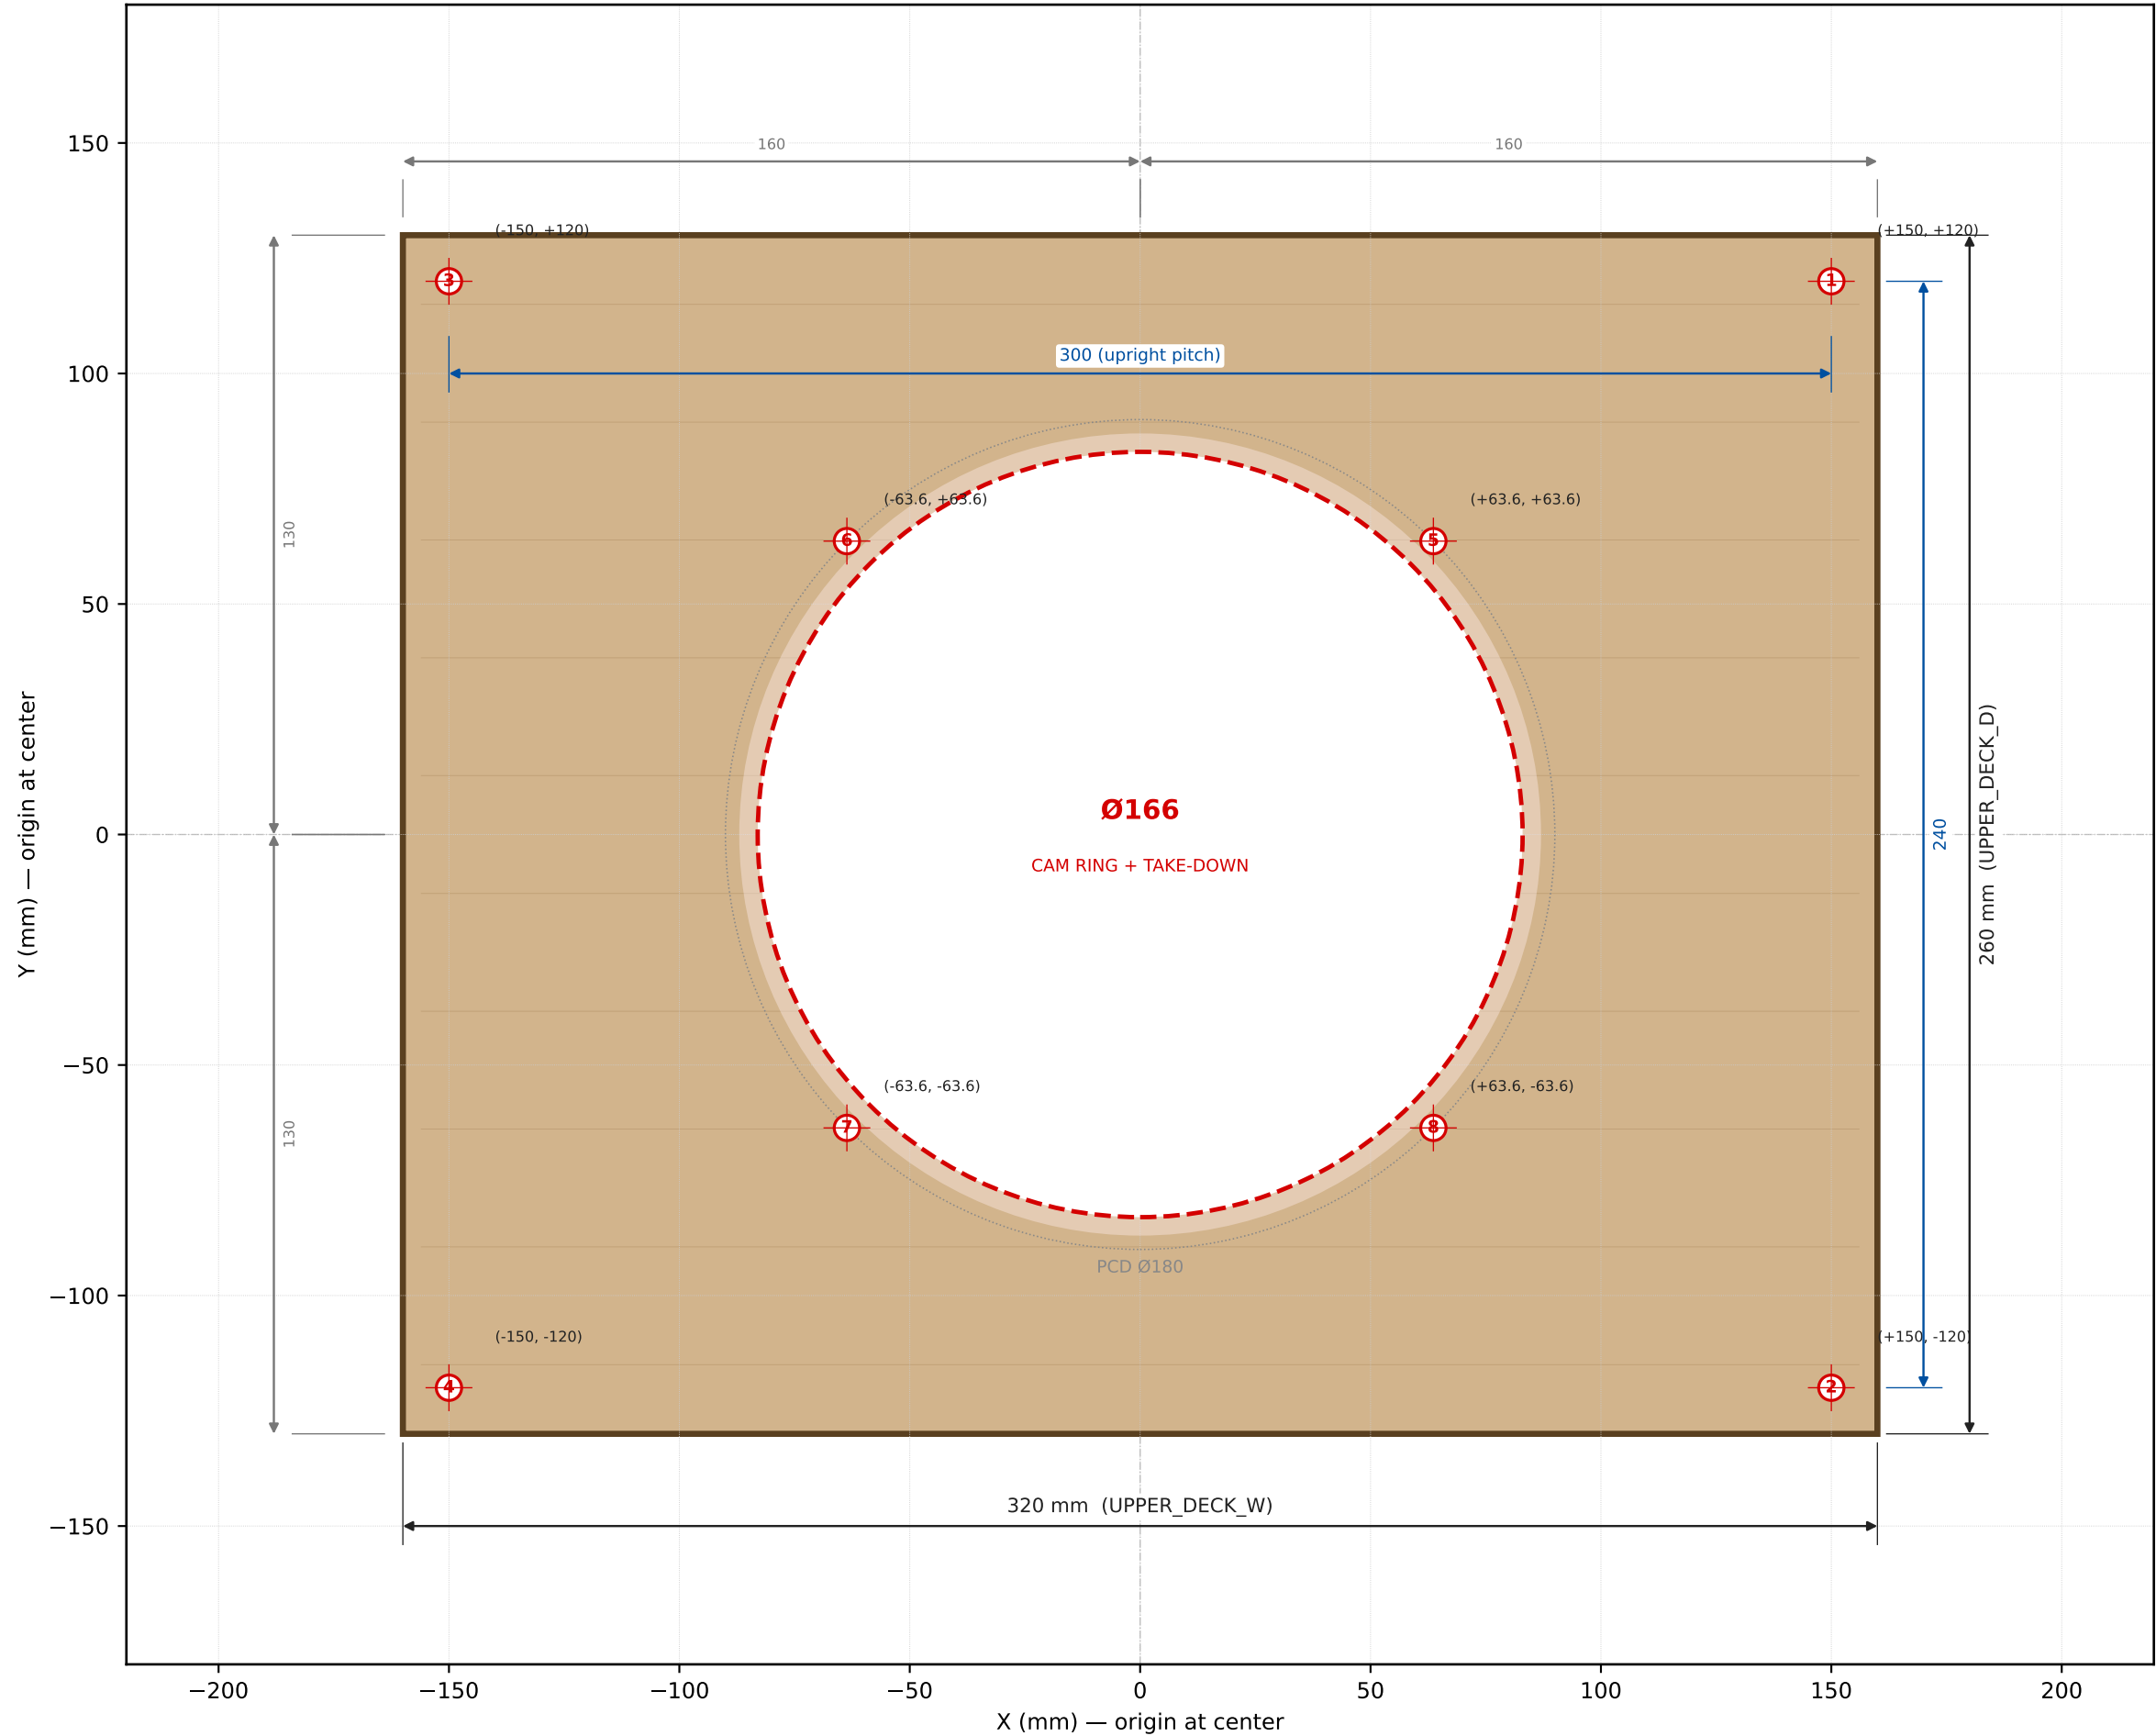

PROJECT	CSM V3 — Circular Sock Machine
PART	Wood Upper Deck V1.0
SIZE	320 × 260 × 12 mm
MATERIAL	Baltic Birch Plywood, 12 mm
FINISH	Sanded smooth, oiled or sealed
TOLERANCE	±1.0 mm (holes), ±2 mm (outline)
REV	V1.0
DATE	2026-06-05
QTY	1 piece

HOLE LIST

#	X	Y	Drill	Use
1	+150	-120	Ø5.5	upright SE
2	+150	+120	Ø5.5	upright NE
3	-150	-120	Ø5.5	upright SW
4	-150	+120	Ø5.5	upright NW
5	+63.6	+63.6	Ø5.5	plate NE (PCD180 @ 45°)
6	-63.6	+63.6	Ø5.5	plate NW (PCD180 @ 135°)
7	-63.6	-63.6	Ø5.5	plate SW (PCD180 @ 225°)
8	+63.6	-63.6	Ø5.5	plate SE (PCD180 @ 315°)
—	0	0	Ø170	cam ring through-hole

TOTAL: 9 holes (8× Ø5.5 + 1× Ø170)

NOTES

- Hole tolerance ±1 mm acceptable
- Cam-ring hole can be jigsawed if no Ø170 hole saw
- Sand all edges before assembly
- Bolt: M5 × 35 mm through wood into
T-nut (upright) or M5 insert (plate)
- Dry-fit before any glue/finish