



Structure of the applications “Forwarder” and “ForwarderReply”

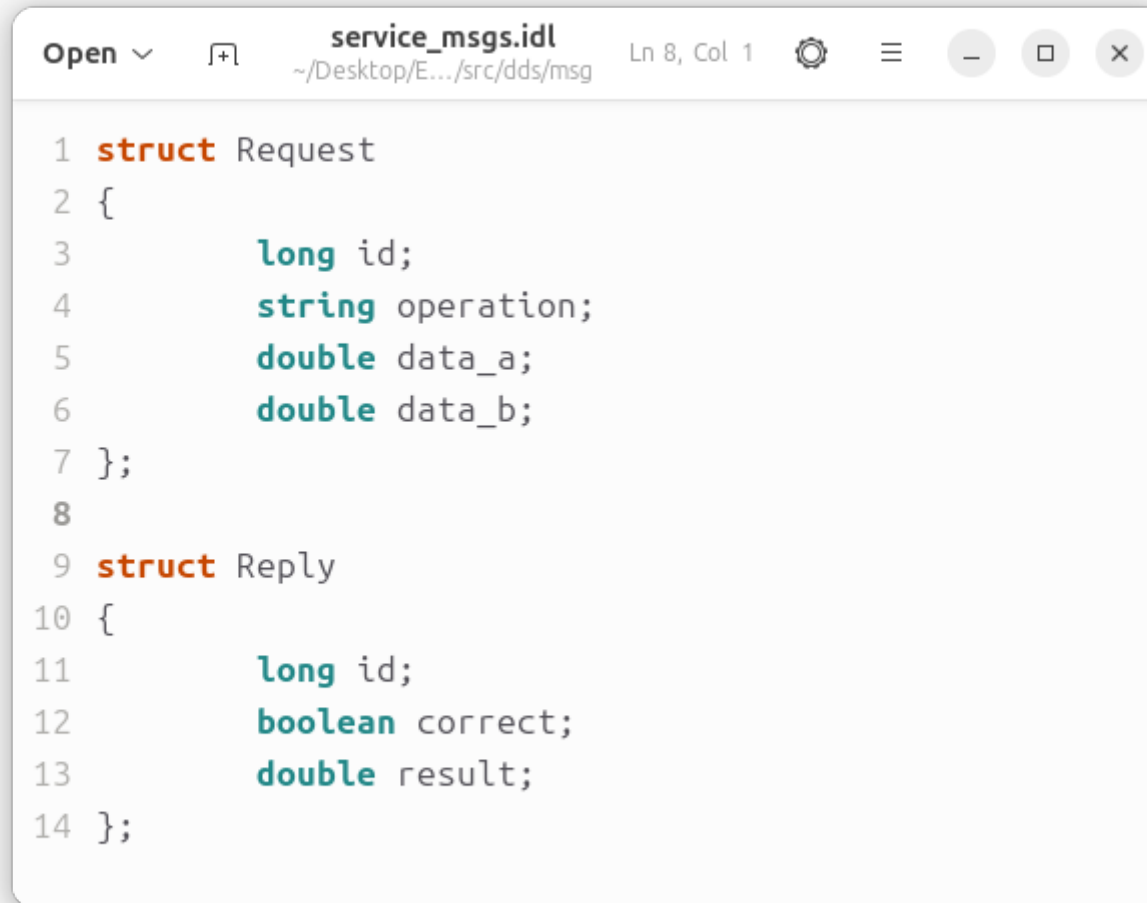


The image shows a code editor window titled "service_msgs.idl" with the file path "~/Desktop/E.../src/dds/msg". The editor displays the IDL code for two structures: "Request" and "Reply".

```
1 struct Request
2 {
3     long id;
4     string operation;
5     double data_a;
6     double data_b;
7 };
8
9 struct Reply
10 {
11     long id;
12     boolean correct;
13     double result;
14 };
```

**app/
Forwarder**

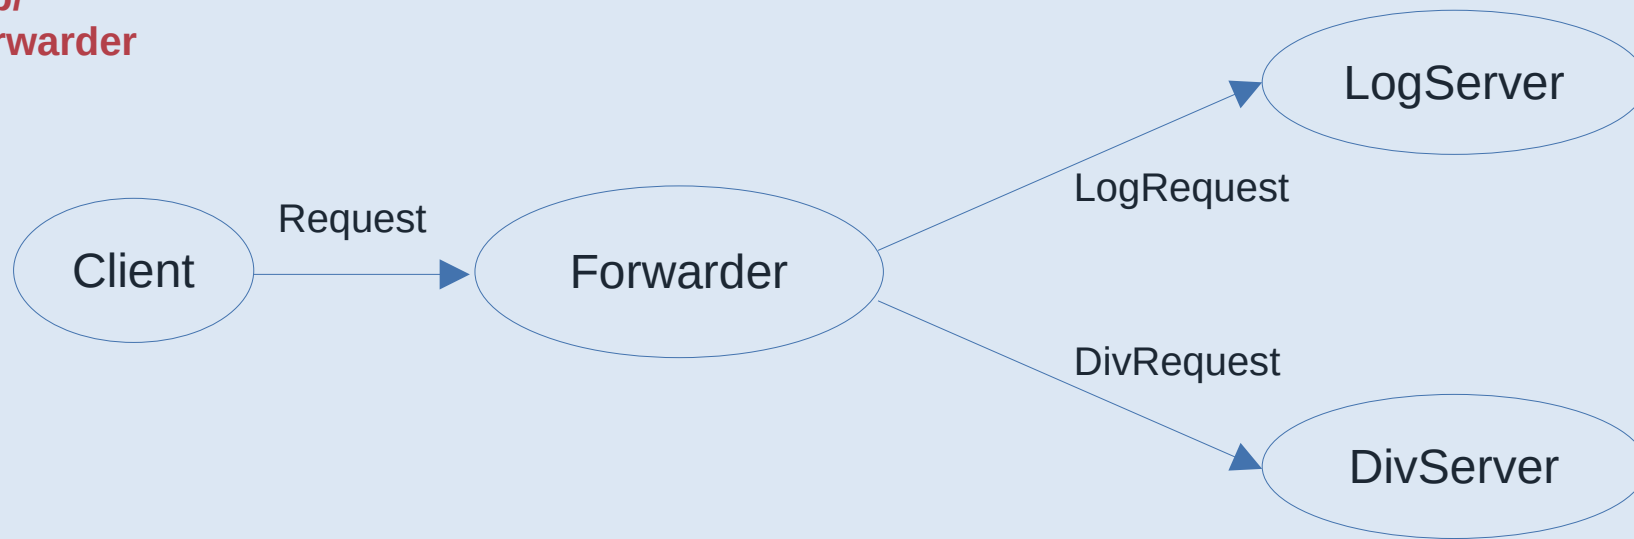

**app/
ForwarderReply**

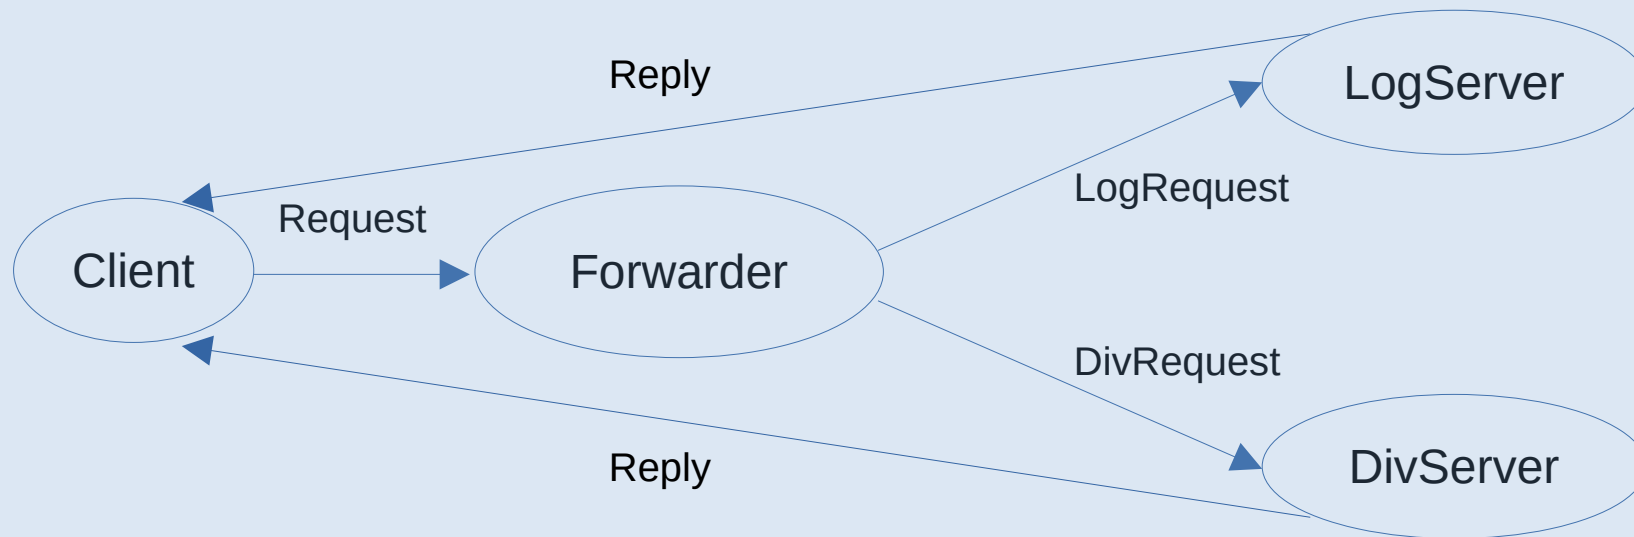

app/ ForwarderReply

