ca-GrQc | Local clustering coefficient distribution

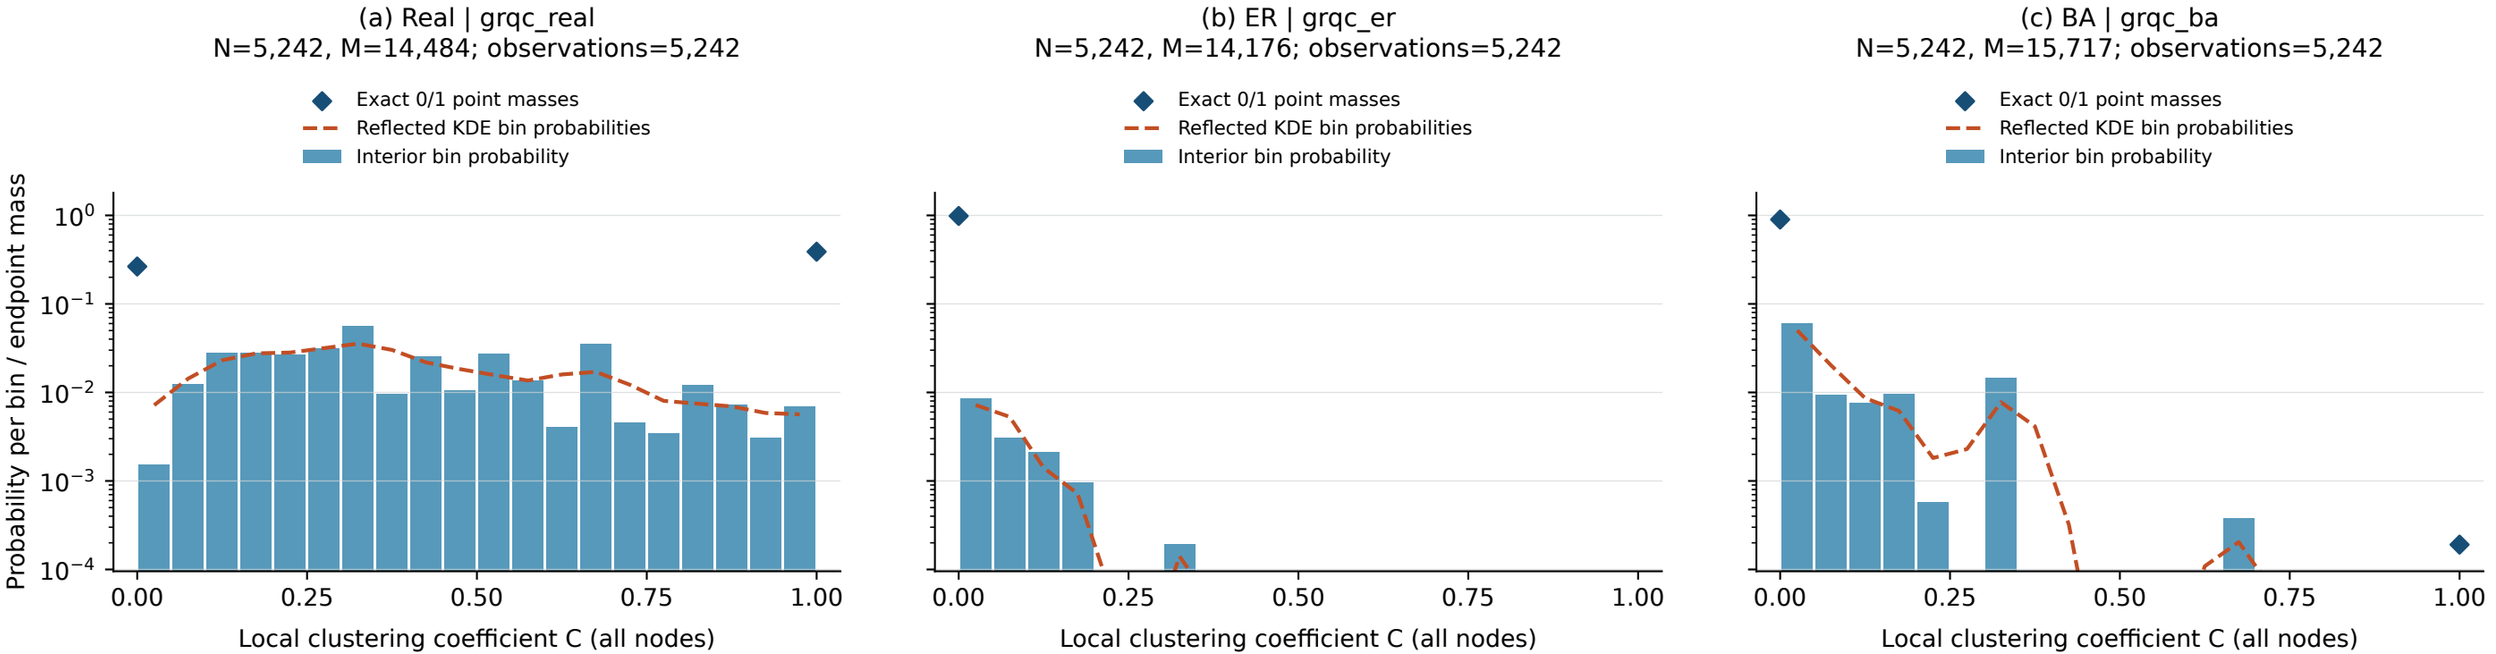

Reflected KDE bin probabilities; KS=0.077. Endpoints are separate point masses.

Reflected KDE bin probabilities; KS=0.139. Endpoints are separate point masses.

Reflected KDE bin probabilities; KS=0.182. Endpoints are separate point masses.

Clustering: 20 equal-width interior bins; exact C=0 and C=1 masses are separate. Curves integrate fitted probability over each bin. Zero-valued observations are retained; empty-frequency bins are saved but not drawn on logarithmic y axes. Fits/smoothers are descriptive, not significance tests.