

Immutable Source-Aware Fold Assignment Report

Dataset: 594 duplicate-controlled images

Outer folds: 5

Inner folds per outer training set: 4

Outer random seed: 20260717

Inner seed base: 20261717

Stratification unit: Source × Class joint stratum

Rationale:

Patient identifiers were not consistently available across repositories. Therefore, unverifiable patient groups were not constructed. Instead, all confirmed exact duplicates were removed before fold construction, and the immutable outer folds were stratified by the joint repository–class label to preserve both source and class composition.

Input manifest SHA-256:

79e74275379f19b80db0e4e540ce9e98e679d1deb52674ba5ec4e2d018b70d86

Outer assignment SHA-256:

6018e7b176ea923a855d7bd97a36ad8fbe8a48087771a40452663e4f7596a028

Outer-Fold Validation Sizes

outer_fold	validation_count
1	119
2	119
3	119
4	119
5	118

Outer-Fold Class Distribution

outer_fold	NORMAL	AMD_DRY	AMD_WET
1	58	28	33
2	57	27	35
3	57	28	34
4	57	28	34
5	58	28	32


Outer-Fold Source Distribution

outer_fold	ADAM	FIVES	ODIR	RFMID
1	11	36	47	25
2	11	36	47	25
3	10	37	47	25
4	10	37	47	25
5	10	37	46	25


Outer-Fold Balance Summary

outer_fold	validation_count	normal_count	dry_count	wet_count	adam_count	fives_count	odir_count	rfmid_count
1	119	58	28	33	11	36	47	25
2	119	57	27	35	11	36	47	25
3	119	57	28	34	10	37	47	25
4	119	57	28	34	10	37	47	25
5	118	58	28	32	10	37	46	25


Outer-Fold Validation Class Distribution

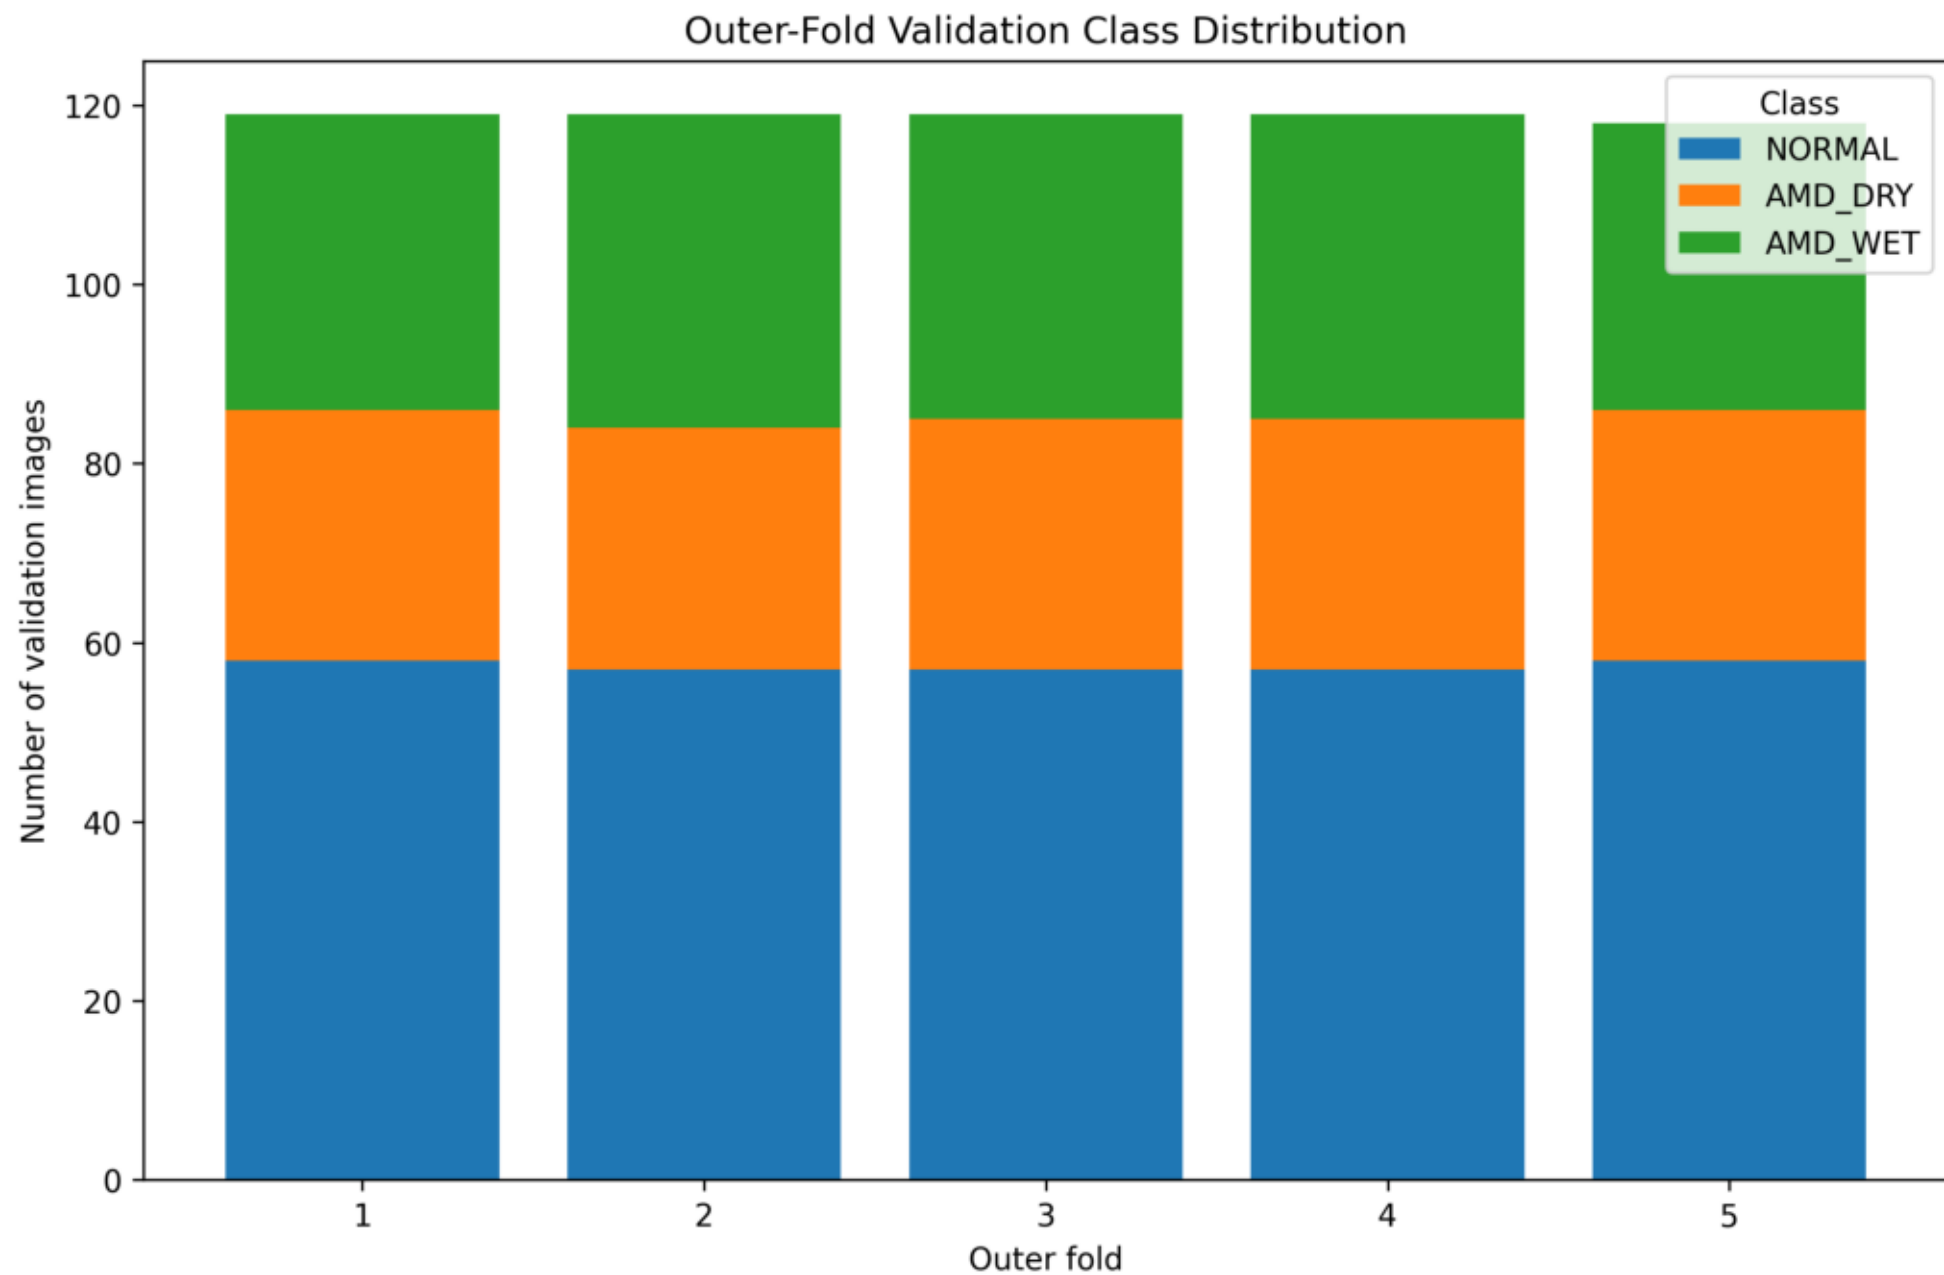

Outer-Fold Validation Source Distribution

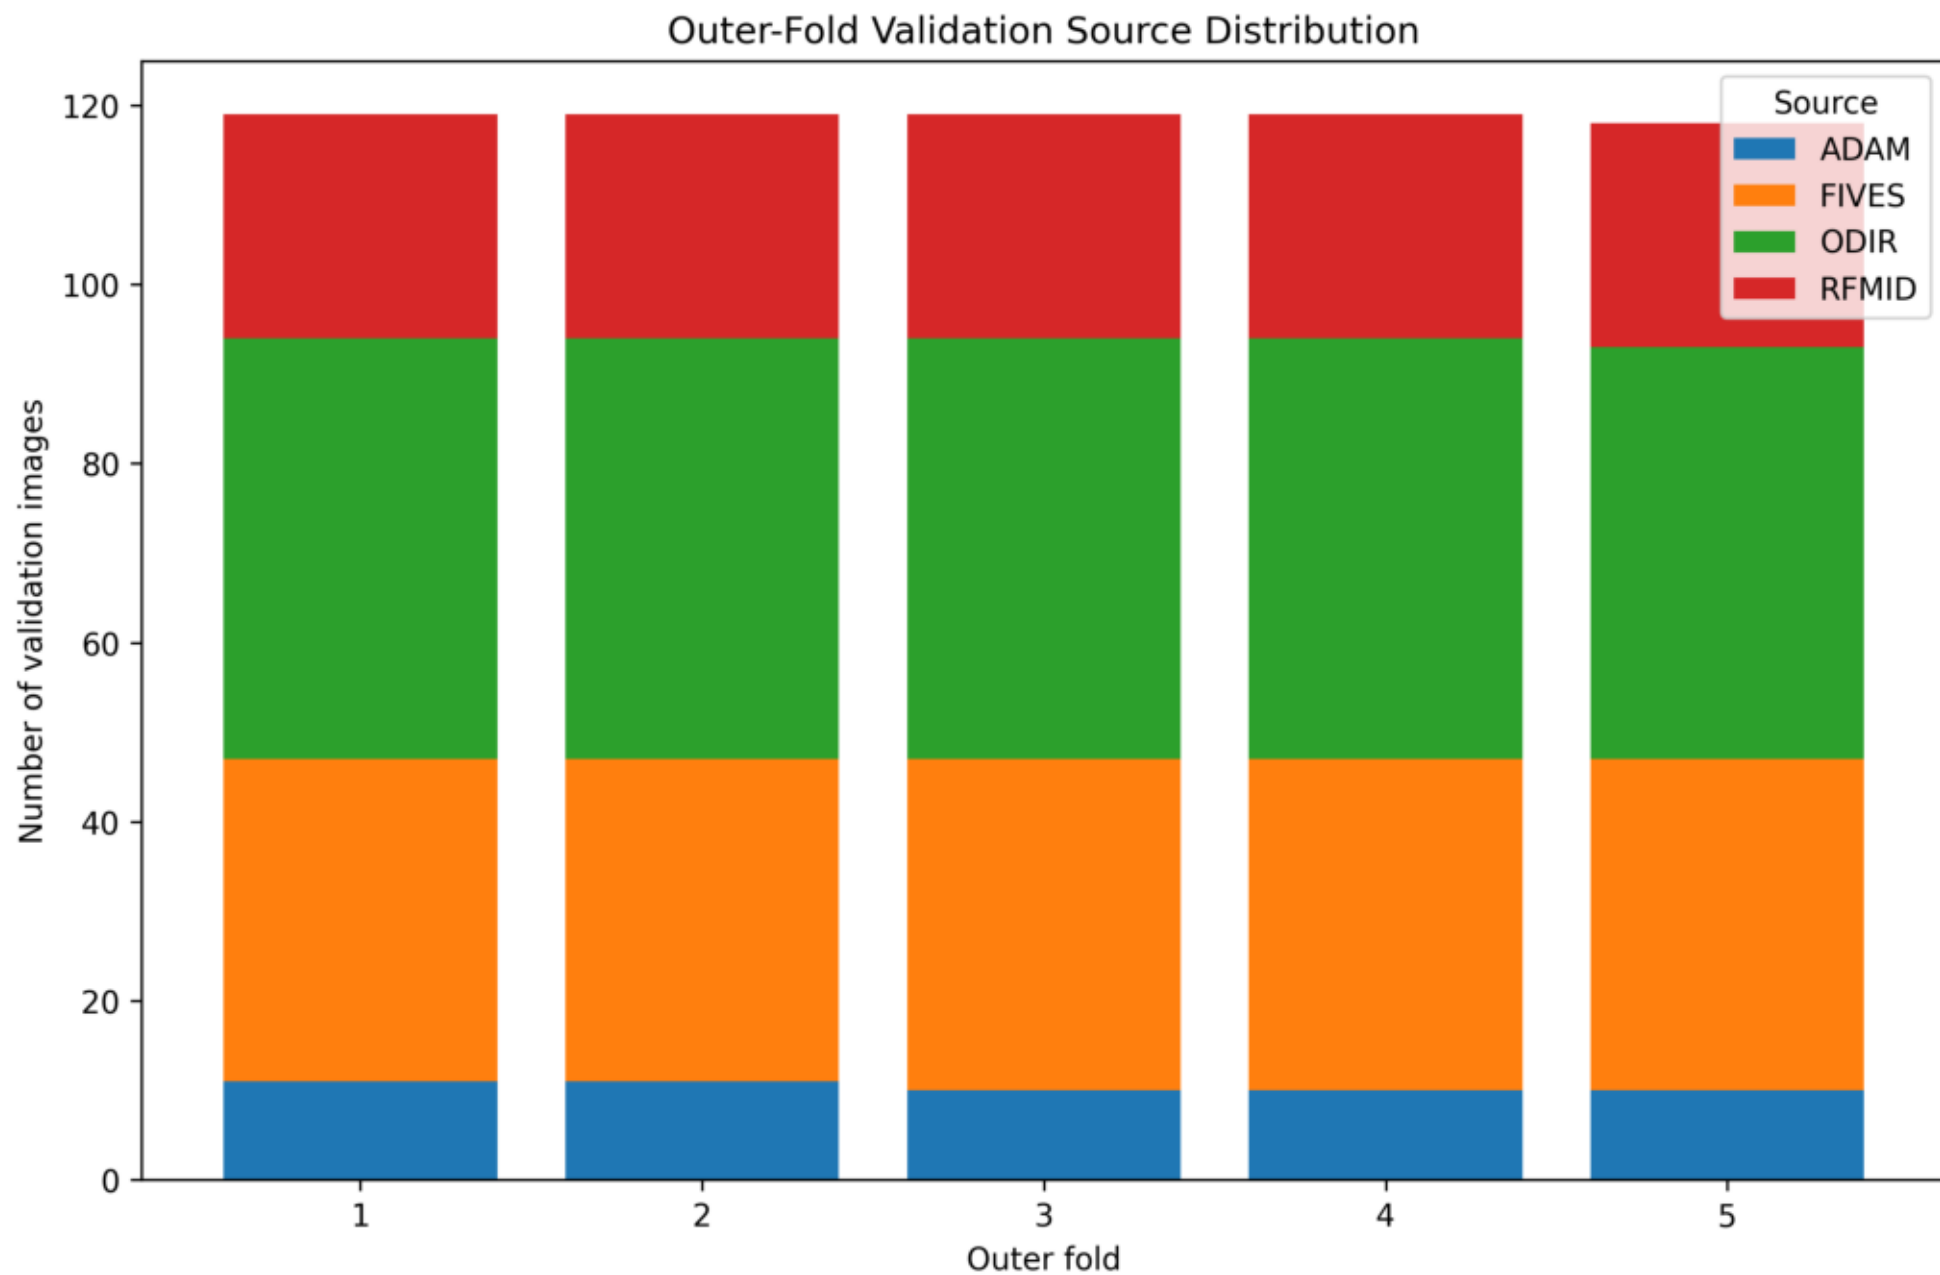

Outer-Fold Source × Class Strata

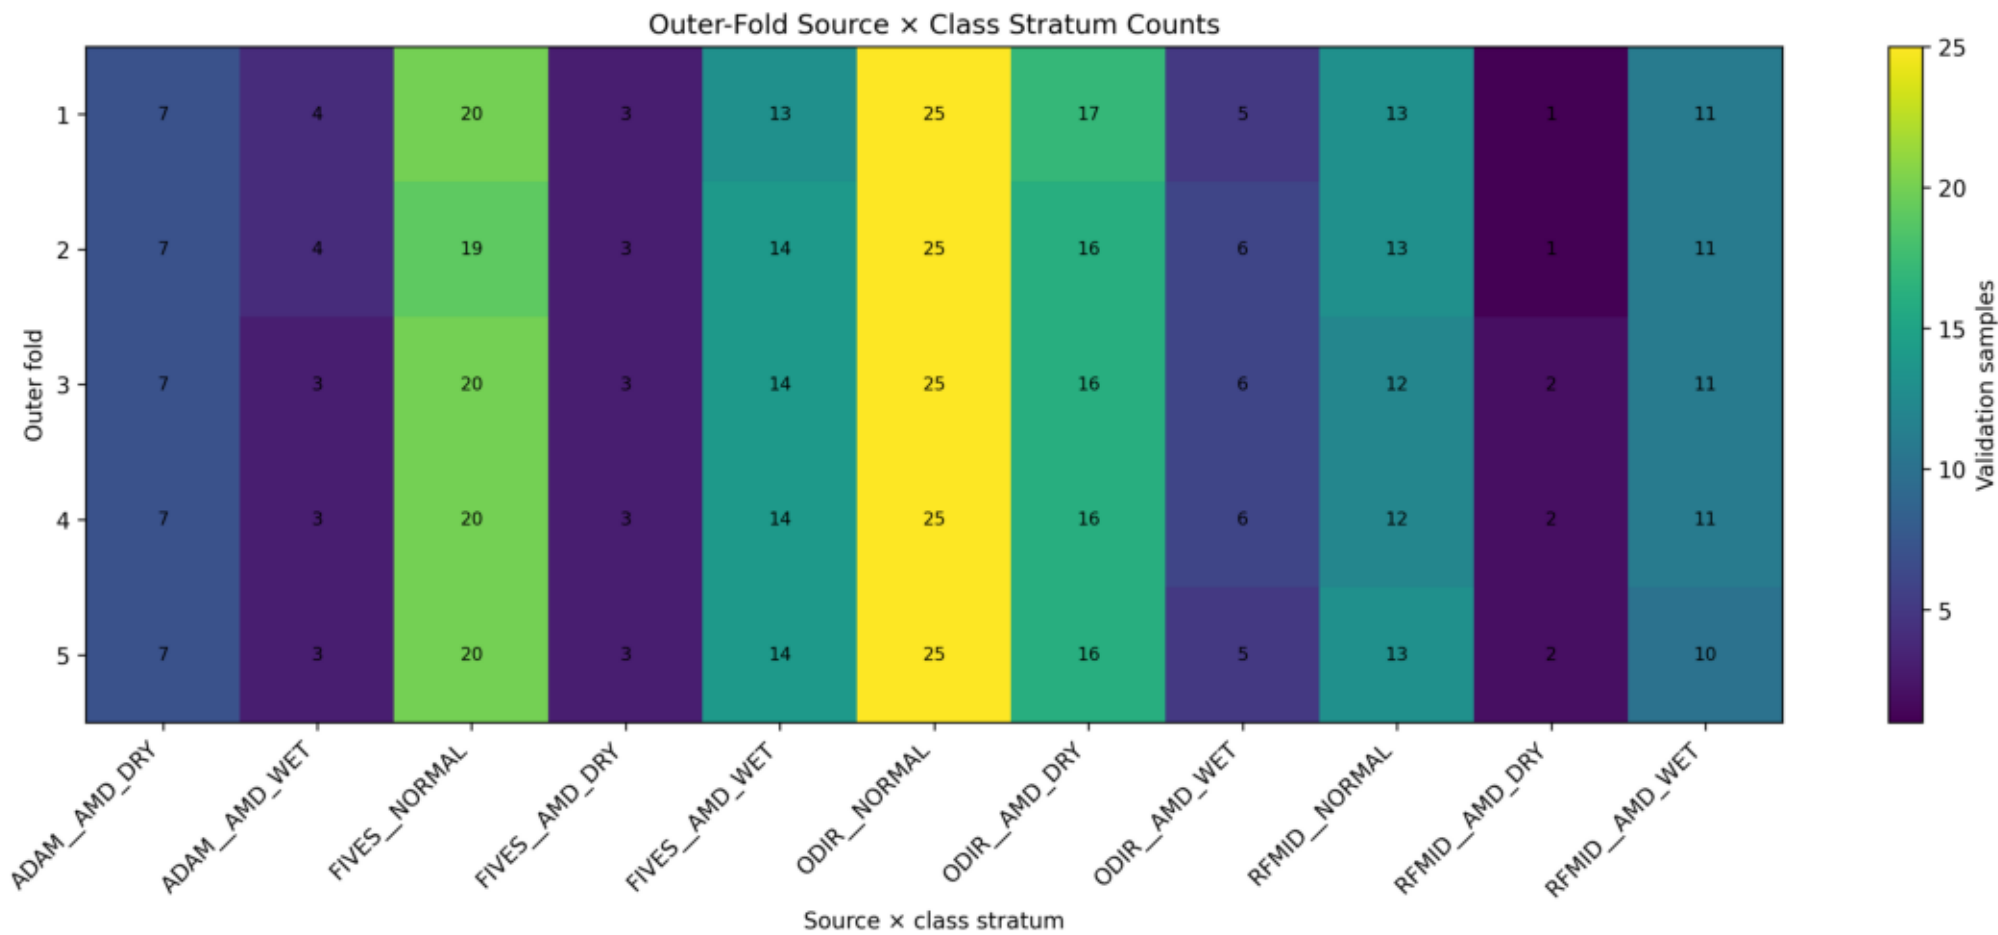

Assignment Checksums

artifact	path	sha256
input_manifest	Dataset Single Source Fixed\revised_594_samples_manifest.csv	79e74275379f19b80db0e4e540ce9e98e679d1deb52674ba5ec4e2d018b70d08
outer_fold_assignments	Dataset Single Source Fixed\immutable_fold_builder\outer_fold_assignments.csv	6918e7b176ea923a855d7bd97a36ad8fbe8a48087771a40452663e4f7596a02
nested_cv_assignments	Dataset Single Source Fixed\immutable_fold_builder\nested_cv_assignments.csv	6915041db8e00fe9aef7d353ef9d86c1d9728560773db75b71664474e2bf4a5b
lodo_split_assignments	Dataset Single Source Fixed\immutable_fold_builder\lodo_split_assignments.csv	0538bee768d4a4e41aa098a785b3943b7d5d7423b108e96331c82cda0527fd4
outer_assignments_canonical_dataframe	canonical CSV representation	c2923e4cbdf0a8d932d84804a94e22769b6d32b4d2184a6ec1428a9c6e27ba1

Evaluation Protocol and Immutability Rules

How to use the assignments

Outer cross-validation:

For outer fold k , samples with `outer_fold=k` are the untouched outer validation set. All remaining samples form the outer training set.

Nested hyperparameter tuning:

Within outer fold k , use only rows with `outer_role='train'`. For inner fold j , samples with `inner_fold=j` are inner validation; all other outer-training samples are inner training. The outer validation samples have no inner-fold assignment and must never influence model selection.

Leave-one-dataset-out evaluation:

For `held_out_source=s`, samples from s are test data and all remaining repositories are training data. Because ADAM contains no NORMAL images, held-out ADAM results must explicitly report the available classes and must not be interpreted as a directly comparable three-class test.

Immutability rule:

Do not regenerate or change these assignments after experiments begin. All models, ablations, baselines, timing studies, and paired statistical comparisons must use these same assignments.