

A woman with curly brown hair and glasses, wearing a white lab coat, is working in a laboratory. She is holding a tablet in her left hand and adjusting a valve on a piece of industrial equipment with her right hand. The background shows various laboratory fixtures and equipment.

SKY LABS

• A SKY AGRO COMPANY •

HYGIENE CHEMICALS, FININGS, PROCESSING AIDS & YEAST

CATALOGUE

Table of Contents

HYGIENE CHEMICALS

Caustic Detergents.....	6
Hypocip.....	7
Nitrocip.....	8
PAA 5 and PAA 15.....	9
Chlor 15.....	10
Peroxyboost.....	11
Chlorofoam.....	12
Caustic Pearl.....	13
Enzyfoam.....	14
Enzybrew 10.....	15
Enzybrew L.....	16

FININGS AND CLARIFICATION

SkySol.....	18
SkyFine Isinglass.....	19
SkyFine Aux.....	20
Sky Tabs and Sky Granules.....	21

YEAST AND FERMENTATION

Fermoale.....	23
Fermoale AY3.....	24
Fermoale AY4.....	25
Fermoale New-E.....	26
Fermolager W.....	27
Fermoplus PerfectBrew-Zn.....	28
Fermoplus GSH.....	29

PROCESSING AIDS

Lactic Acid.....	31
Gypsum.....	32
Flake.....	33
Epsom Salts.....	34
HLT (Hot Liquor Treatment).....	35
Aquatreat.....	36
Mashtreat.....	37
Phosphoric Acid.....	38
Foam Doctor.....	39

About SKY LABS



ABOUT US

SKY AGRO LTD originally began as an agricultural trading and manufacturing company, exporting oilseeds and grains from Ukraine. Among our portfolio was malting barley, which we supplied to maltings across the country.

Building on this foundation, we established SKY MALT to supply brewers with high-quality malt at competitive prices.

In 2025, we took our next big step. We opened a new manufacturing plant in Daventry, Northamptonshire, built around the needs of British breweries, to create a proper one-stop shop for brewers. Not just ingredients, but a full range of hygiene chemicals, yeast, enzymes, finings and processing aids, all from one place.

It's a new venture, but our team has spent their careers in this industry. They know the products, they know the processes, and they understand what breweries actually need to run well. That experience is there every time you call.

We keep the things breweries use every day in stock, and we've worked hard to get the range right. Not just the staples, but the products that are harder to find, that used to mean calls to two or three different suppliers. One account, one delivery, everything in one place (except hops, for now).

And when something crops up, we're here. Our team will talk you through it, help you find the right solution, and make sure you've got what you need. We want to help breweries make great beer.

OUR PARTNERS

We work with suppliers we trust, whose products we know well and are confident recommending.





Hygiene Chemicals

A clean brewery is a consistent brewery. Our hygiene range covers every stage of the process, from caustic CIP to terminal disinfection, matched to your water hardness and the realities of daily production.





Hygiene Chemicals

Caustic Detergents

DESCRIPTION

Our caustic soda-based detergents are formulated for brewery CIP, covering everything from brewhouse cleaning to cask washing.

Our Plus, Extra and Super formulations contain EDTA sequestrant, which prevents calcium and magnesium ions in hard water from interfering with cleaning performance. The right formulation depends on your water hardness; the harder the water, the higher the EDTA concentration required.

APPLICATIONS

Our range covers three formulations, each suited to a different water hardness:

Caustic Plus for moderate to hard water. Use at 6% v/v in the brewhouse; 3-6% v/v for FVs, conditioning tanks, casks and kegs.

Caustic Extra for very hard water. Use at 8% v/v in the brewhouse; 4-8% v/v for FVs, conditioning tanks, casks and kegs.

Caustic Super for exceptionally hard water. Particularly effective for beer stone control and cask washing. Use at 5% v/v for FVs and conditioning tanks; 2% v/v for casks.



QUICK REFERENCE

Recommended use:

Brewhouse CIP, vessel and cask washing

Packaging options:

25L, 200L, IBC



Compatible surfaces:

Stainless steel; not suitable for brass, aluminium, zinc and galvanised surfaces

Water hardness range:
Soft to exceptionally hard

Shelf life:

12 months from production date

Storage:

Store in original container at 10-20°C. Keep away from direct sunlight. Do not allow to freeze.

For technical guidance and advice, speak to our team.



Hygiene Chemicals

Hypocip

DESCRIPTION

Hypocip is a chlorinated caustic detergent in which sodium hydroxide and sodium hypochlorite work together to deliver soil removal and disinfection in a single pass. Hard water tolerant and effective at ambient temperature, it can be used across brewery vessels, soak baths, floors and walls.

APPLICATIONS

Soak baths: Use at 1% v/v. Rinse fittings free of visible soil before placing in the bath to avoid depleting the solution prematurely. Change the bath weekly or sooner if the solution becomes heavily loaded.

Brewery vessels: Use at 1.0-2.5% v/v depending on the level of soiling. Contact time 30-60 minutes at ambient to 50°C. Do not exceed 2.5% v/v on stainless steel, as higher concentrations risk pitting the surface over time.

Floors and walls: Use at 5% v/v. Particularly effective at removing mould growth on brewery floors and walls. Allow adequate contact time before rinsing and ensure good ventilation when working at this concentration.



QUICK REFERENCE

Recommended use:

Vessel CIP, soak baths, floor and wall sanitation

Packaging options:

25L, 200L, IBC



Compatible surfaces:

Stainless steel, copper, plastic; not suitable for brass, aluminium, zinc and galvanised surfaces

Shelf life:

12 months from production date. Chlorine content degrades over time; use fresh stock.

Storage:

Store in original container at 10-20°C. Keep away from direct sunlight. Do not allow to freeze.

For technical guidance and advice, speak to our team.



Hygiene Chemicals

Nitrocip

DESCRIPTION

Nitrocip is a blend of nitric and phosphoric acid formulated for descaling and beer stone removal from fermentation vessels and casks. Unlike alkaline cleaners, it is unaffected by CO₂, which makes it well suited to cleaning bright beer tanks under pressure. This removes the need to vent and repurge tanks around each CIP, which can deliver meaningful CO₂ savings over time.

APPLICATIONS

Descaling: Use at 4% v/v. Beer stone and scale build-up is a gradual process and heavier deposits may require longer contact time or repeat treatments. Monitor acid strength throughout the descale using an appropriate test method and top up concentration as required; as the acid reacts with scale deposits it will weaken, and maintaining the correct concentration is important for a thorough result. Maximum temperature 50°C.

CIP: Use at 2% v/v as part of a regular CIP programme. When used on BBTs, Nitrocip can be circulated with the vessel under CO₂ pressure, avoiding the gas losses associated with venting before and after an alkaline CIP. This is particularly useful for breweries where CO₂ usage and cost are a concern. Maximum temperature 50°C.



QUICK REFERENCE

Recommended use:

Descaling, beer stone removal, BBT CIP under pressure

Packaging options:

25L, 200L, IBC



Compatible surfaces:

Stainless steel; not suitable for brass, aluminium, zinc and galvanised surfaces

Shelf life:

12 months from production date



Important note:

Never mix with chlorine or chlorinated products.

Storage:

Store in original container at 10-20°C. Keep away from direct sunlight. Do not allow to freeze.

For technical guidance and advice, speak to our team.



Hygiene Chemicals

PAA 5 and PAA 15

DESCRIPTION

PAA 5 and PAA 15 are stabilised peracetic acid solutions for use as terminal disinfectants in brewery CIP. Peracetic acid is one of the most effective microbicides available, active against a broad spectrum of microorganisms including aerobic and anaerobic bacteria, bacterial spores, moulds, yeasts and fungi. It is fast acting, non-foaming and non-tainting, and provided the solution is not left to pond, no rinse is required after use.

APPLICATIONS

PAA 5 is the standard concentration, delivering 50,000ppm in concentrated form. Use at 200-500ppm on brewery CIP; to make a 500ppm solution add 1 litre to 99 litres of water. Contact time 10 minutes.

PAA 15 is the higher concentration option, delivering 150,000ppm in concentrated form. Use at 200-500ppm on brewery CIP; to make a 500ppm solution add 1 litre to 297 litres of water. Contact time 10 minutes. At three times the active concentration but a fraction of the price difference, PAA 15 offers a straightforward cost saving for breweries using peracetic acid regularly.



QUICK REFERENCE

Recommended use:

Terminal disinfection,
brewery CIP

Packaging options:

25L, 200L, IBC



Compatible surfaces:

304L and 316L stainless steel, PTFE, PVDF, glass. Soft PVC and polyethylene are suitable for short contact time only.

Shelf life:

12 months from production date

Storage:

Store in original container at 10-15°C. Keep away from direct sunlight. Do not allow to freeze.

For technical guidance and advice, speak to our team.



Hygiene Chemicals

Chlor 15

DESCRIPTION

Chlor 15 is a 15% sodium hypochlorite solution for use as a terminal disinfectant in brewery CIP. It is effective against a broad spectrum of microorganisms including vegetative and spore-forming bacteria, moulds, yeasts and viruses, and will also remove staining and odours. Unlike peracetic acid, Chlor 15 requires a thorough rinse with fresh water after use to remove all traces of sodium hypochlorite before the vessel is returned to service.

APPLICATIONS

Terminal disinfection: Use at 0.15-0.3% v/v via soak, CIP or manual application. Contact time 15-20 minutes. Maximum temperature 50°C. Always rinse thoroughly with fresh water after use.

QUICK REFERENCE

Recommended use:

Terminal disinfection, brewery CIP

Packaging options:

25L, 200L, IBC



Compatible surfaces:

Stainless steel; not suitable for brass, aluminium, zinc and galvanised surfaces. Do not exceed 2.5% v/v on stainless steel.

Shelf life:

12 months from production date. Chlorine content degrades over time; use fresh stock.

Storage:

Store in original container at 10-20°C. Keep away from direct sunlight. Do not allow to freeze.

For technical guidance and advice, speak to our team.





Hygiene Chemicals

Peroxyboost

DESCRIPTION

Peroxyboost is a hydrogen peroxide-based additive for use in the caustic stage of brewery CIP. Added to hot caustic, it releases oxygen gas which agitates the cleaning solution and drives it into soil deposits, enhancing the performance of the caustic without the need to increase concentration or temperature. The result is a more effective clean using less chemical and less energy.

APPLICATIONS

Add Peroxyboost at 0.5-1.0% of the total CIP volume during the caustic cycle. For best results, split the dose: add half at one third of the way through the cycle and the remainder at two thirds. Peroxyboost requires hot caustic to activate; it will not release oxygen at low temperatures.

Ensure the CIP route or vessel is adequately vented before use to avoid pressure build-up from the oxygen gas produced.



QUICK REFERENCE

Recommended use:

Caustic CIP additive,
beer stone removal

Packaging options:

25L, 200L, IBC



Compatible surfaces:

Stainless steel; avoid prolonged contact with rubber and soft metals including copper, zinc and aluminium



Important note:

Never mix with chlorine or chlorinated products.

Shelf life:

12 months from production date.

Storage:

Store in original container below 25°C. Keep away from direct sunlight. Do not allow to freeze.

For technical guidance and advice, speak to our team.



Hygiene Chemicals

Chlorofoam

DESCRIPTION

Chlorofoam is an alkaline chlorinated detergent combining sodium hydroxide, sodium hypochlorite and an amine oxide surfactant. The surfactant provides foaming action that helps the product cling to vertical surfaces, making it well suited to manual cleaning of vessels, floors, walls and drains, as well as soak baths for fittings and small equipment. Effective at ambient temperature. Always rinse thoroughly with fresh water after use before returning any surface to service.

APPLICATIONS

Brewery vessels: Use at 1.0-2.5% v/v. Contact time 30-60 minutes at ambient temperature. Do not exceed 2.5% v/v on stainless steel, as higher concentrations risk pitting the surface over time.

Soak baths: Use at 1% v/v. Rinse fittings free of visible soil before placing in the bath. Change the solution when it becomes visibly loaded or at least weekly.

Floors and walls: Use at 3-5% v/v. The foam helps the product adhere to walls and vertical surfaces. Ensure adequate ventilation when working at higher concentrations and allow sufficient contact time before rinsing.



QUICK REFERENCE

Recommended use:

Well-suited for foaming guns

Packaging options:

25L, 200L, IBC



Compatible surfaces:

Stainless steel; not suitable for brass, aluminium, zinc and galvanised surfaces.

Shelf life:

12 months from production date. Chlorine content degrades over time; use fresh stock and store away from heat.

Storage:

Store in original container at 10-20°C. Keep away from direct sunlight. Do not allow to freeze. Store away from heat.

For technical guidance and advice, speak to our team.



Hygiene Chemicals

Caustic Pearl

DESCRIPTION

Caustic Pearl is dry sodium hydroxide (NaOH) at minimum 97% purity, the standard alkaline cleaner for brewery CIP. It breaks down protein, starch and fats across brewhouse vessels, fermentation vessels and associated pipework. Used alone it will not sequester calcium and magnesium ions, so in hard water areas it should be dosed alongside a sequestrant such as our CIP Sequestrant. For a fully formulated caustic with EDTA already incorporated, see our Caustic Detergents range.

APPLICATIONS

Brewhouse and vessel CIP: Dissolve in water to a final concentration of 1-2% v/v, equivalent to 1-2kg per hl of water. Always add pearl to water, never water to pearl. Circulate at 50-80°C for 20-45 minutes depending on soil load. Rinse thoroughly with fresh water after use before proceeding to the disinfection stage. If source water hardness exceeds 200mg/L as CaCO₃, dose with a sequestrant to maintain cleaning performance.

For specific dosage rates, speak to our technical team.

QUICK REFERENCE

Recommended use:

Brewhouse CIP, vessel and pipework cleaning

Packaging options:

25kg



Compatible surfaces:

Stainless steel; not suitable for brass, aluminium, zinc and galvanised surfaces.

Shelf life:

12 months from production date.

Storage:

Store in a cool, dry place in a sealed container at 10-20°C. Keep away from moisture and direct sunlight.

For technical guidance and advice, speak to our team.



Hygiene Chemicals

Enzyfoam

DESCRIPTION

Enzyfoam SG is a self-foaming enzymatic detergent for manual cleaning of brewery floors, walls and hard-to-reach surfaces. Its enzyme blend breaks down starch, grease and proteins on contact, while a built-in sequestrant prevents mineral clogging in drains and pipework. Neutral pH, non-corrosive and with a biodegradation rate above 98% in 28 days. Well suited to foam gun application.

APPLICATIONS

Floors and surfaces: Dilute to 3% v/v in warm water at 40-50°C and apply using a foaming cleaning system or foam gun. Allow 15-30 minutes contact time, rinse with clean water, disinfect, then rinse again with clean water.

For specific dosage rates, speak to our technical team.



QUICK REFERENCE

Recommended use:

Brewery floors, walls and open surfaces; foam gun application

Packaging options:

25L, 200L, IBC



Compatible surfaces:

All surfaces; suitable for use on floors, walls and open surfaces in food production environments

Shelf life:

12 months from production date

Storage:

Store in original container between 4 and 25°C. Keep away from direct sunlight.

For technical guidance and advice, speak to our team.



Hygiene Chemicals

Enzybrew 10

DESCRIPTION

Enzybrew 10 is a tri-enzyme alkaline detergent for brewery CIP, formulated as a non-corrosive alternative to caustic soda. It breaks down the full range of organic soils encountered in brewing, including vegetable fibres, starch, caramelised sugars and proteins, across brewhouse vessels, fermenters, conditioning tanks, plate heat exchangers and pipework. Phosphorus-free, safe on all surfaces including Teflon, and with over 91% naturally derived ingredients.

APPLICATIONS

Vessel and equipment CIP: Dilute in warm water at 50-60°C and mix well. Use at 0.5-1% v/v for light soiling and 1-2% v/v for heavier deposits. Circulate for 45-120 minutes, rinse with warm water, then follow with a disinfectant or acid rinse for 10 minutes before a final clear water rinse. Avoid prolonged contact with light metals including aluminium, iron and copper.

For specific dosage rates, speak to our technical team.



QUICK REFERENCE

Recommended use:

Brewery vessel CIP, enzymatic alternative to caustic soda

Packaging options:

10kg



Compatible surfaces:

All brewery surfaces including Teflon; avoid prolonged contact with aluminium, iron and copper

Shelf life:

12 months from production date.

Storage:

Store in original container between 4 and 25°C. Keep away from direct sunlight.

For technical guidance and advice, speak to our team.



Hygiene Chemicals

Enzybrew L

DESCRIPTION

Enzybrew L is a liquid enzyme detergent for soaking removable brewery parts including valves, rubber hoses and fittings, and for cleaning bottling equipment. It breaks down protein waste and polysaccharide residues without the corrosion risk associated with caustic or acid products. Non-foaming, easy to rinse and non-classified under CLP, it is safe for both operators and equipment.

APPLICATIONS

Soaking: Dilute to 1% v/v in hot water at 45-55°C. Soak removable parts for 4-12 hours, then rinse with hot water, disinfect and rinse with clean water. For CIP cleaning, circulate at 1% v/v for 20-60 minutes. If prolonged contact with aluminium, iron or copper is likely, test on a small area first.

For specific dosage rates, speak to our technical team.

QUICK REFERENCE

Recommended use:

Soaking of fittings and removable parts, bottling equipment cleaning

Packaging options:

5L, 25L



Compatible surfaces:

All brewery surfaces; test first on aluminium, iron and copper

Shelf life:


12 months from production date.

Storage:

Store in original container between 4 and 25°C. Keep away from direct sunlight.

For technical guidance and advice, speak to our team.



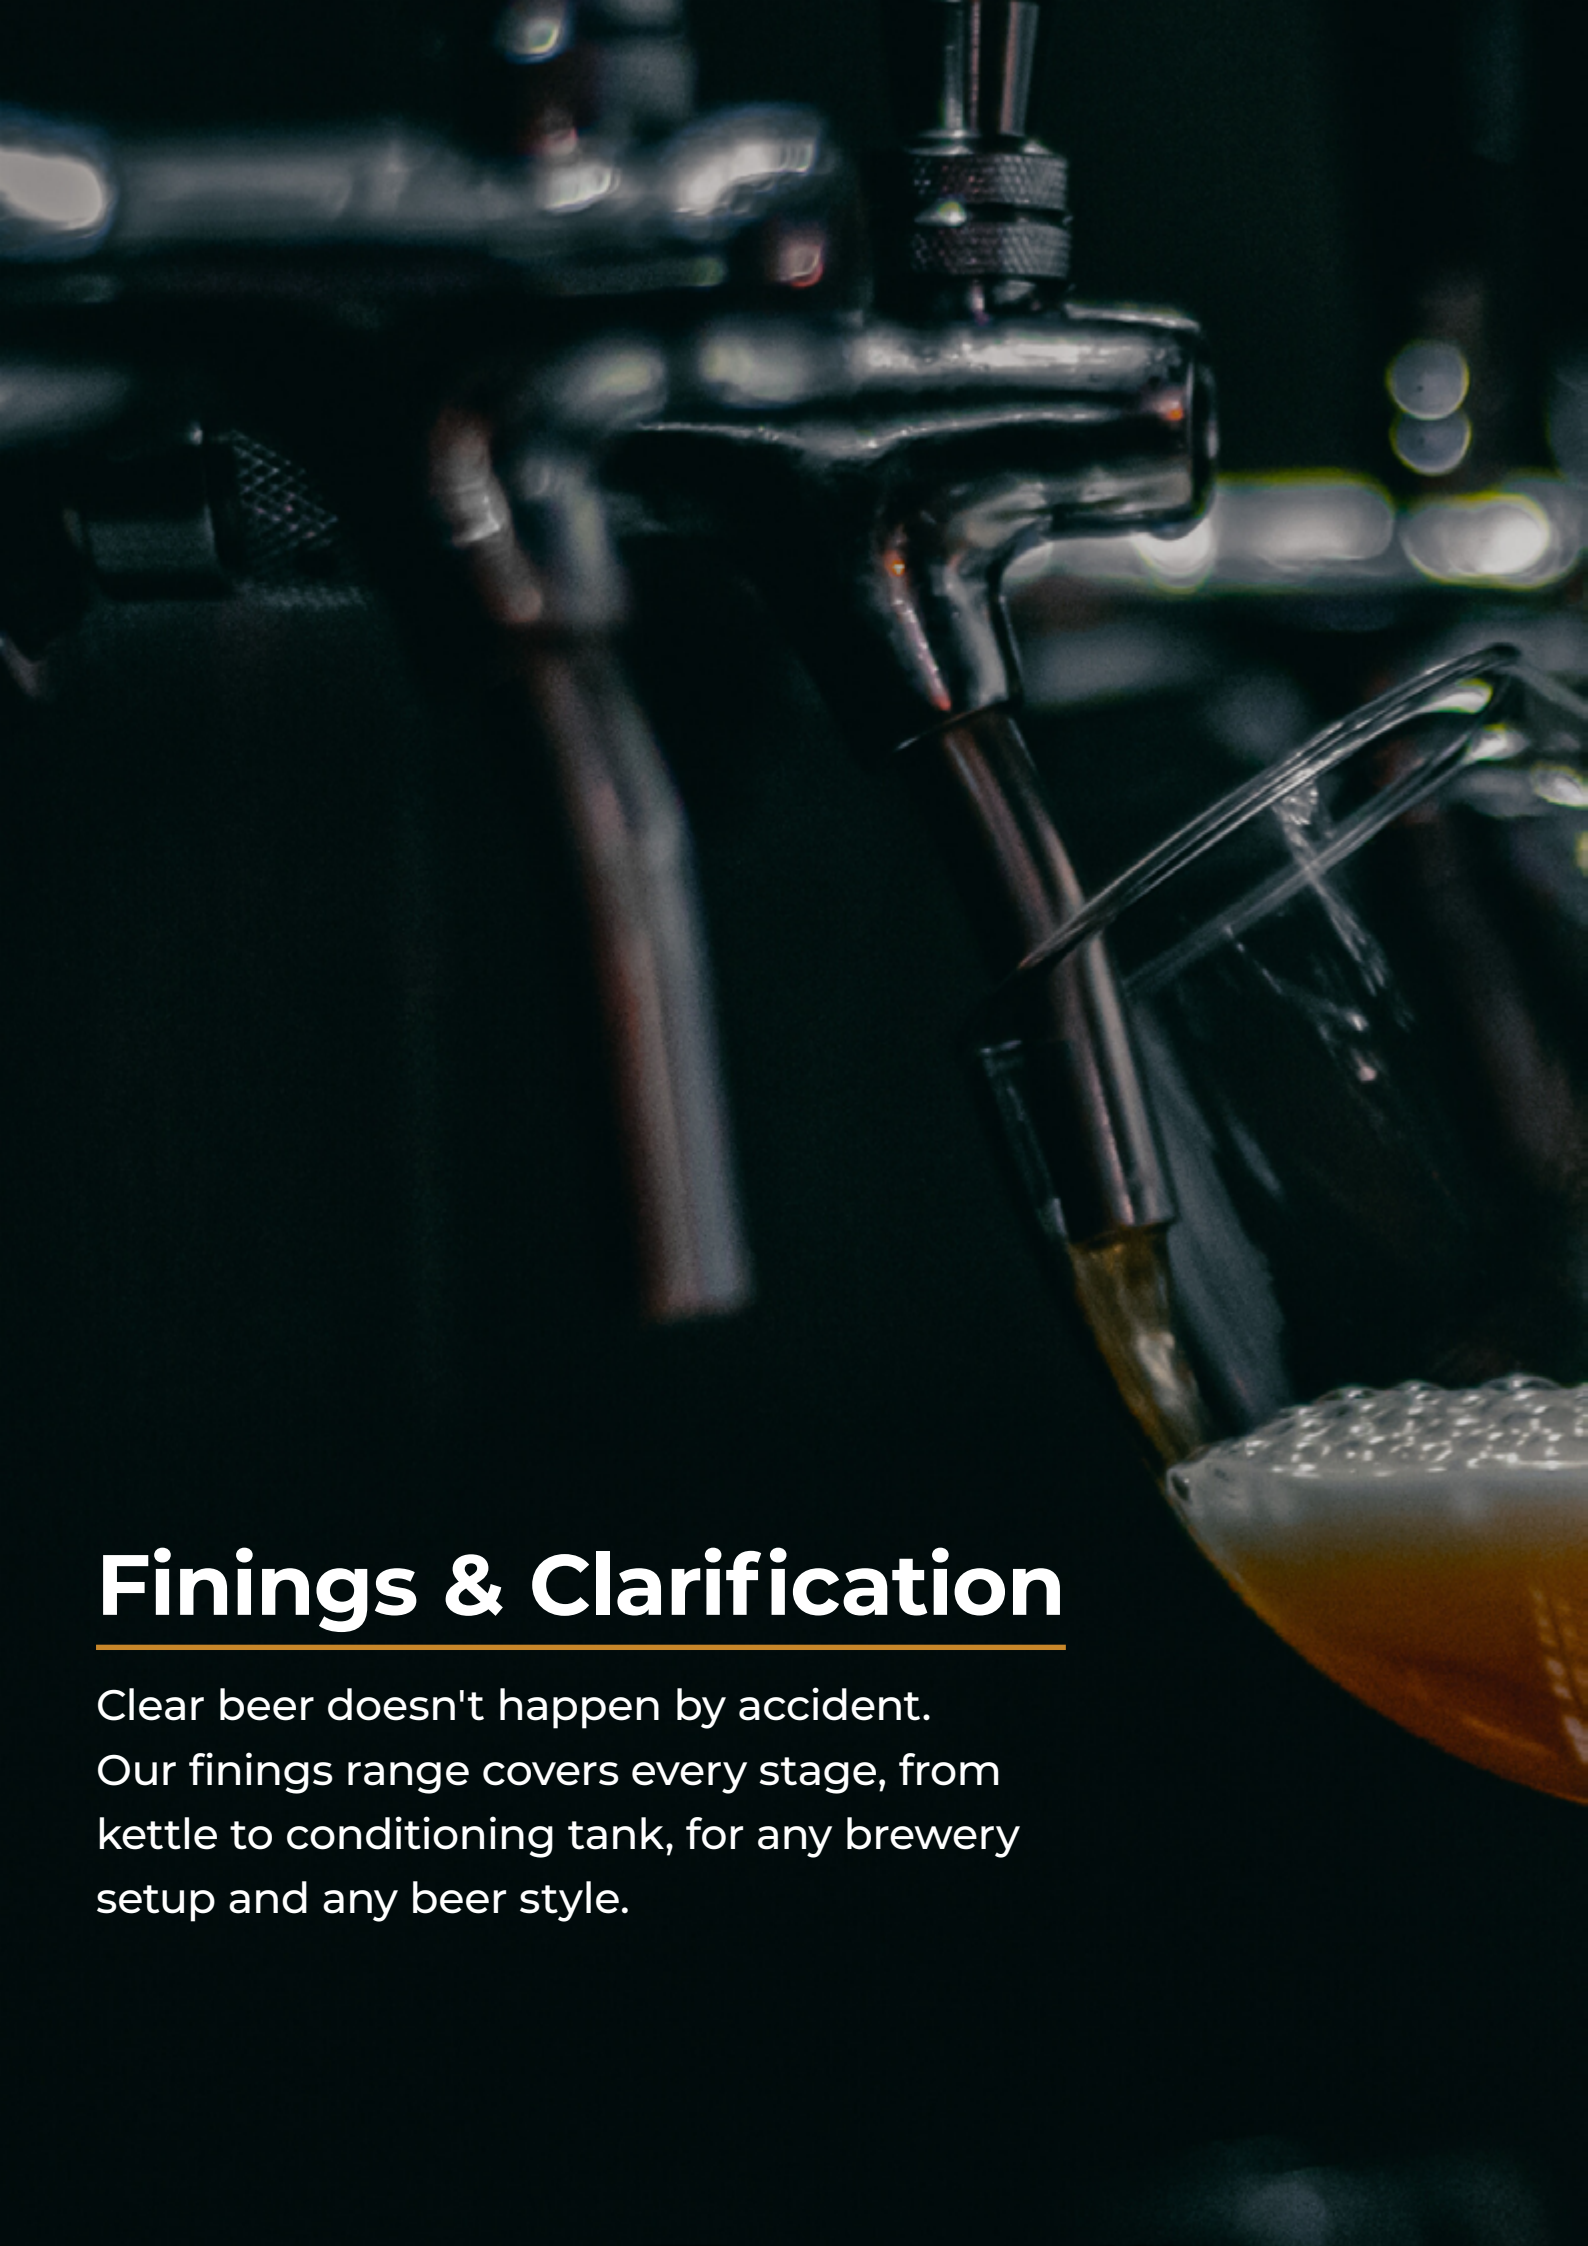

Finings & Clarification

Clear beer doesn't happen by accident. Our finings range covers every stage, from kettle to conditioning tank, for any brewery setup and any beer style.

Finings & Clarification

SkySol

DESCRIPTION

SkySol is a highly concentrated silica sol solution for use as a vegan alternative to isinglass finings. It works by binding to haze-forming proteins and yeast particles, increasing their size and accelerating sedimentation.

The result is brighter beer in less time, with a compact, stable sediment that minimises losses on transfer. Effective at low addition rates, it can be used at the end of fermentation or at whirlpool for wort clarification, and carries no flavour impact at recommended dosages.

APPLICATIONS

Wort clarification: Add at the start of whirlpooling or in line on transfer to the whirlpool. Reduces protein carryover into fermentation, improving downstream clarity and filterability from the outset.

Beer clarification: Add at the end of fermentation, ideally dosed in line during transfer to conditioning tank to ensure even distribution. Promotes rapid, compact yeast and protein sedimentation, reducing conditioning time and minimising losses on racking.

Typical addition rates are in the range of 20 to 200ml per hectolitre. The correct rate will depend on the solids load in the beer and is best established by carrying out a small-scale trial before full production use.

For specific dosage rates, speak to our technical team.



QUICK REFERENCE

Recommended use:

Beer and wort clarification, vegan silica fining

Packaging options:

20L, 200L, IBC



Shelf life:

12 months from production date

Storage:

Store in original container between 5 and 35°C.

Do not store in direct sunlight or in bright light. Do not allow to freeze.

For technical guidance and advice, speak to our team.

Finings & Clarification

SkyFine Isinglass

DESCRIPTION

SkyFine RTU and Skyfine Conc are isinglass finings derived from fish swim bladders, used to promote rapid yeast sedimentation in both cask-conditioned and brewery-conditioned beer. Isinglass carries a positive charge which attracts negatively charged yeast cells, binding them into larger flocs that settle quickly to the bottom of the vessel.

The result is faster clarification, reduced conditioning time and improved filtration efficiency. For best results on cask-conditioned beer, use in conjunction with Sky Aux auxiliary finings. Remix thoroughly before use as the product may separate during storage.

APPLICATIONS

SkyFine RTU is a ready-to-use solution requiring no dilution before addition. Typical dosage is 3-4 pints per barrel.

SkyFine Conc is a concentrated solution that must be diluted before use: 1 part SkyFine Conc to 2 parts water. Typical dosage is 3-4 pints of diluted solution per barrel. The more cost-effective option for higher-volume users.

For both products, the optimum dosage depends on beer recipe, yeast cell count and yeast type. Adding too much isinglass will result in fluffy sediment, increased beer losses and poor clarity. Contact our technical team for guidance on conducting a finings optimisation trial.

For specific dosage rates, speak to our technical team.

QUICK REFERENCE

Recommended use:

Yeast removal, cask and tank clarification

Packaging options:

25L, 200L, IBC



Shelf life:

8 weeks from production date

Storage:

5-10°C. Do not freeze. Keep away from direct sunlight.

For technical guidance and advice, speak to our team

🔥 Finings & Clarification

SkyFine Aux

DESCRIPTION

SkyFine Aux is an auxiliary fining designed to work alongside isinglass or vegan finings to improve clarity and reduce conditioning time. It works by imparting a negative charge onto proteins, making them available for removal when the subsequent isinglass or vegan fining is added.

Used correctly, it reduces the load on the primary fining and speeds up sedimentation, resulting in a more compact sediment, reduced beer losses and improved filterability. SkyFine Aux is vegan-friendly and suitable for use in all beer types.

APPLICATIONS

Add at 0.25-1 pint per barrel. SkyFine Aux can be dosed directly into the fermentation vessel at the end of fermentation, directly into the conditioning tank, or directly into the cask. Dosage rates should be optimised regularly to maintain performance. Contact our technical team for guidance on running an optimisation trial.

For specific dosage rates, speak to our technical team.

QUICK REFERENCE

Recommended use:

Auxiliary fining, used alongside SkyFine or SkySol

Packaging options:

25L, 200L, IBC

**Shelf life:**

6 months from production date

Storage:

Store below 20°C. Do not freeze.
Keep away from direct sunlight.

For technical guidance and advice, speak to our team.

🔥 Finings & Clarification

Sky Tabs and Sky Granules

DESCRIPTION

Sky Tabs and Sky Granules are kettle finings made from partially refined carrageenan, a natural polysaccharide derived from seaweed. Added to the kettle in the final stages of the boil, carrageenan binds to haze-forming proteins, encouraging a well-defined hot break and reducing protein carryover into fermentation. Benefits include: improved yeast vitality, reduced conditioning time, better filterability and a positive contribution to the shelf life of the finished beer.

APPLICATIONS

Sky Tabs and **Sky Granules** contain the same active material, available in dissolvable tablet and granule form respectively.

Dose directly into the kettle 10 minutes before the end of the boil at 1-3g per hl. Sky Tabs can be added directly without any preparation, making them particularly convenient for smaller additions or manual dosing. Sky Granules are weighed out before addition and suit breweries with established weighing equipment or higher volume requirements.

Optimise the dosage rate regularly and particularly after receiving a new season malt, as protein levels can vary between harvests.

For specific dosage rates, speak to our technical team.

QUICK REFERENCE

Recommended use:

Kettle finings, hot break improvement, protein removal

Packaging options:

2kg, 5kg, 20kg

Shelf life:


12 months from production date

Storage:

10-20°C. Do not freeze.
Keep away from direct sunlight.

For technical guidance and advice, speak to our team.

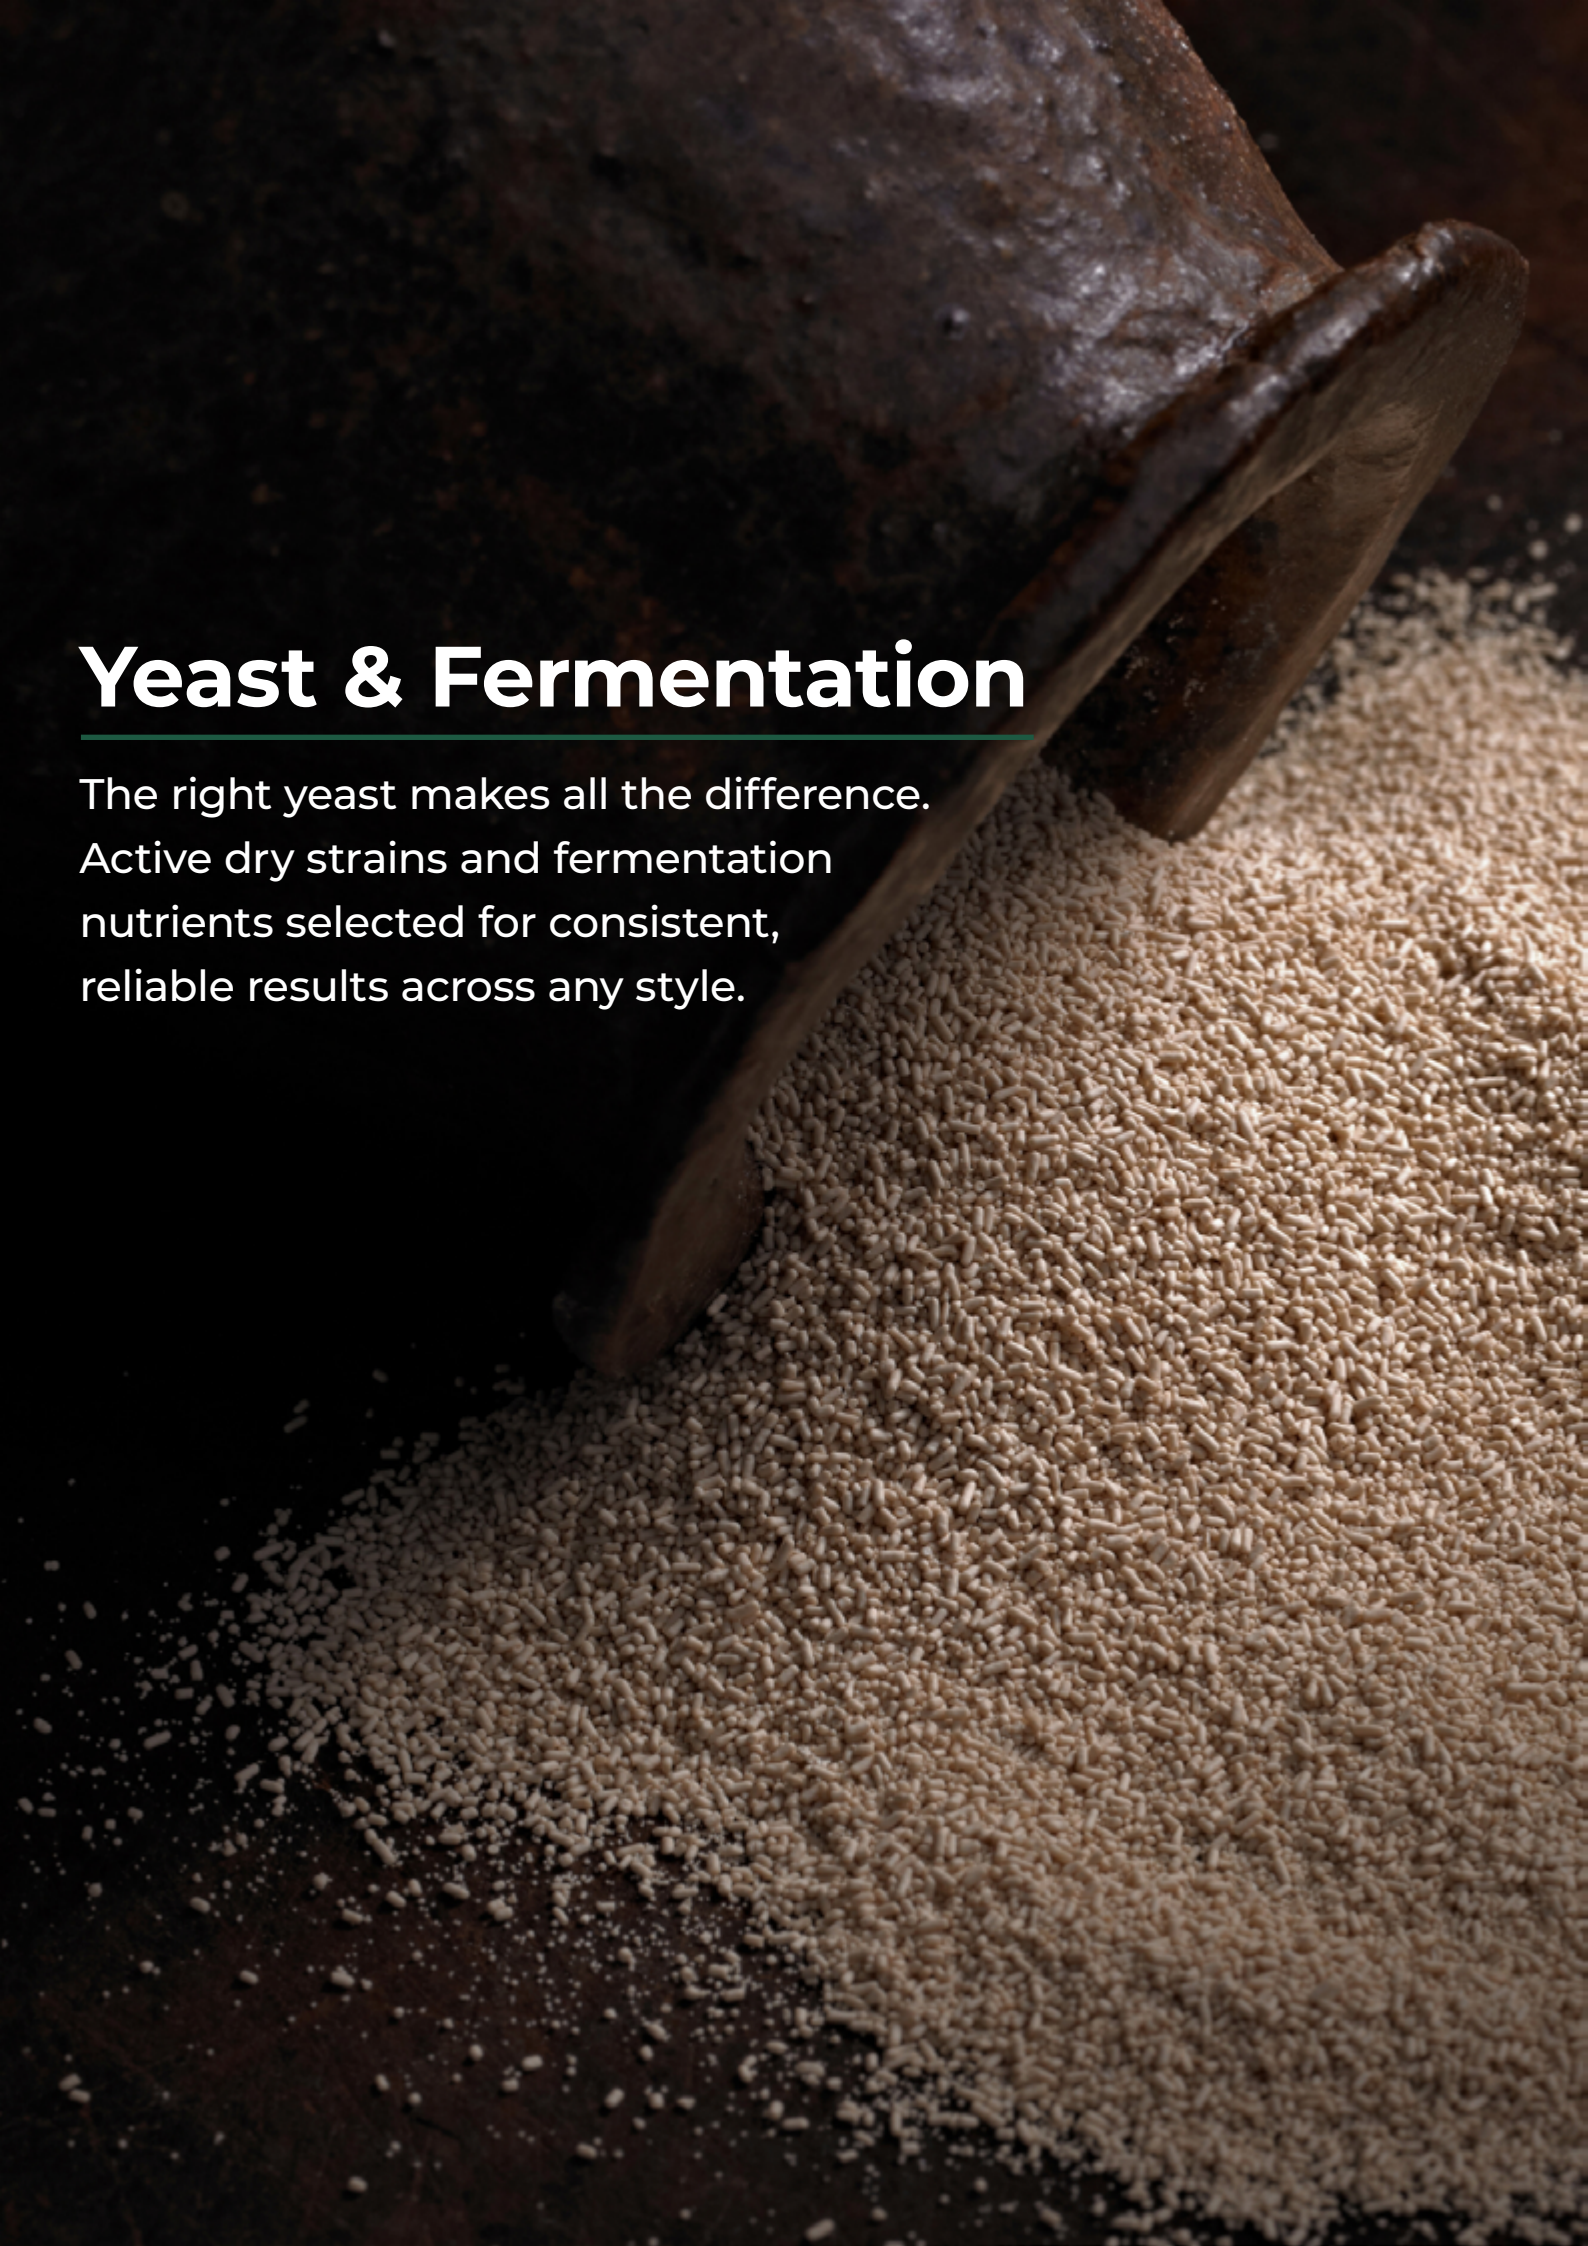

A close-up, high-angle photograph of a dark, weathered wooden barrel tilted on its side. A large, conical pile of light-colored, elongated grains, possibly rice or barley, has spilled out from the barrel's opening onto a dark, textured surface. The lighting is dramatic, highlighting the texture of the wood and the individual grains.

Yeast & Fermentation

The right yeast makes all the difference. Active dry strains and fermentation nutrients selected for consistent, reliable results across any style.

Yeast & Fermentation

Fermoale

DESCRIPTION

Fermoale is a UK-origin strain particularly suited to English and Scottish style ales including brown ales, porters and dark beers. It delivers a malt-driven flavour profile with fruity apple and citrus notes and a light diacetyl character that contributes caramel and toffee warmth. Attenuation 75-80%, flocculation low, fermentation temperature 16-23°C, alcohol tolerance 12% ABV.

APPLICATIONS

Rehydrate before pitching or pitch directly into wort. Ferment at 16-23°C. Attenuation 75-80%, flocculation low, alcohol tolerance 12% ABV. Pitching rate 60-100g per hL.



QUICK REFERENCE

Recommended use:

English and Scottish ales, brown ales, porters, dark beers

Packaging options:

500g, 10kg



Flavour profile:

Malt-forward, fruity apple and citrus, light diacetyl

Flocculation: Low

Attenuation: 75-80%

Fermentation temperature:

16-23°C

Shelf life:

12 months from production date

Storage:

Store in a cool, dry place, ideally below 10°C. Keep sealed. Use promptly once opened.

Yeast & Fermentation

Fermoale AY3

DESCRIPTION

Fermoale AY3 is a versatile UK-origin top-fermenting active dry yeast suitable for a wide range of English, American and Belgian style ales. It produces a malt-forward flavour profile with rich biscuit and soft caramel notes and a light citrus edge. High flocculation makes it a practical choice for breweries looking for well-defined sediment and good beer clarity without extended conditioning time.

APPLICATIONS

Rehydrate before pitching or pitch directly into wort. Ferment at 16-23°C. Attenuation 75-83%, flocculation high, alcohol tolerance 12% ABV. Pitching rate 60-100g per hl.



QUICK REFERENCE

Recommended use:

English, American and Belgian ales, pale ales, IPAs

Packaging options:

500g, 10kg



Flavour profile:

Malt-forward, biscuit, soft caramel, light citrus

Flocculation: High

Attenuation: 75-83%

Fermentation temperature:

16-23°C

Shelf life:

12 months from production date

Storage:

Store in a cool, dry place, ideally below 10°C. Keep sealed. Use promptly once opened.

For technical guidance and advice, speak to our team.

Yeast & Fermentation

Fermoale AY4

DESCRIPTION

Fermoale AY4 is a US-origin top-fermenting active dry yeast selected for its versatility across American and English style ales including pale ales, IPAs, brown ales and porters. It ferments with high attenuation and speed, producing a clean, neutral profile with low diacetyl that allows malt and hop character to express themselves clearly. High flocculation and rapid sedimentation keep conditioning time and beer losses to a minimum.

APPLICATIONS

Rehydrate before pitching or pitch directly into wort. Ferment at 16-23°C. Attenuation 84%, flocculation high, alcohol tolerance 10-11% ABV. Pitching rate 60-100g per hl.



QUICK REFERENCE

Recommended use:

American and English ales, pale ales, IPAs, brown ales, porters

Packaging options:

500g, 10kg



Flavour profile:

Clean, neutral, low diacetyl

Flocculation: High

Attenuation: 84%

Fermentation temperature:

16-23°C

Shelf life:

12 months from production date

Storage:

Store in a cool, dry place, ideally below 10°C. Keep sealed. Use promptly once opened.

For technical guidance and advice, speak to our team.

Yeast & Fermentation

Fermoale New-E

DESCRIPTION

Fermoale New-E is a top-fermenting active dry yeast developed for New England IPAs, hazy pale ales and other haze-positive styles. Its medium-low flocculation keeps yeast in suspension longer, contributing to the soft mouthfeel and residual body that define the style, while its ester profile intensifies hop-derived tropical fruit notes including mango, passionfruit and citrus. A strong choice for any hop-forward beer where yeast character needs to work with the dry hop rather than against it.

APPLICATIONS

Rehydrate before pitching or pitch directly into wort. Ferment at 16-23°C. Attenuation 75-80%, flocculation medium-low, alcohol tolerance 10-11% ABV. Pitching rate 60-100g per hl. The lower flocculation of this strain means longer conditioning time should be expected compared to high-flocculating strains.



QUICK REFERENCE

Recommended use:

NEIPA, hazy IPA, hazy Pale Ale

Packaging options:

500g, 10kg



Flavour profile:

Tropical fruit, mango, passionfruit, citrus, soft and full mouthfeel

Flocculation: Medium-low

Attenuation: 75-80%

Fermentation temperature:

16-23°C

Shelf life:

12 months from production date

Storage:

Store in a cool, dry place, ideally below 10°C. Keep sealed. Use promptly once opened.

For technical guidance and advice, speak to our team.

Yeast & Fermentation

Fermolager W

DESCRIPTION

Fermolager W is a bottom-fermenting active dry lager yeast of German origin, suited to a wide range of lager styles including Pilsner, Helles, Bock, Vienna and Märzen. It ferments cleanly with very low ester and phenolic character, producing a crisp, balanced finish that lets the malt and hop profile of the beer speak for itself.

APPLICATIONS

Rehydrate before pitching or pitch directly into cool wort at 10-14°C. Attenuation 82%, flocculation high, alcohol tolerance 9-10% ABV. Pitching rate 75-100g per hl. High gravity, high adjunct or high acidity fermentations may require higher pitching rates and the addition of yeast nutrients.



QUICK REFERENCE

Recommended use:

Pilsner, Helles, Bock, Vienna, Märzen

Packaging options:

500g, 10kg



Flavour profile:

Clean, crisp, low esters and phenolics

Flocculation: High

Attenuation: 82%

Fermentation temperature:

10-14°C

Shelf life:

12 months from production date

Storage:

Store in a cool, dry place, ideally below 10°C. Keep sealed. Use promptly once opened.

For technical guidance and advice, speak to our team.

Yeast & Fermentation

Fermoplus Perfectbrew-Zn

DESCRIPTION

Fermoplus Perfectbrew-Zn is a complex yeast nutrient blend formulated to support healthy, consistent fermentation across a wide range of brewing conditions. It contains diammonium phosphate, yeast hulls, yeast autolysates, inactive yeast and thiamine hydrochloride (vitamin B1), and is enriched with biologically sourced zinc at approximately 3,000ppm.

APPLICATIONS

Add at 10-12g per hl of cold wort. At a dosage of 10g per hl, Fermoplus Perfectbrew ZN provides approximately 14mg per litre of yeast assimilable nitrogen.



QUICK REFERENCE

Recommended use:

Fermentation support, high gravity brewing, adjunct brewing, stuck fermentation prevention

Packaging options:

1kg



Shelf life:

12 months from production date

Storage:

Store in a cool, dry place, ideally below 10°C. Keep sealed. Use promptly once opened.

For technical guidance and advice, speak to our team.

Yeast & Fermentation

Fermoplus GSH

DESCRIPTION

Fermoplus GSH is a yeast-derived nutrient supplement with high antioxidant activity, designed to protect yeast during propagation and early fermentation. Its active component is glutathione, a naturally occurring tripeptide that shields yeast cells against oxidative stress and free radical damage. Used during rehydration or propagation, it supports healthy cell development, maintains consistent yeast quality across generations and reduces the risk of oxidation-related off-flavours.

APPLICATIONS

Add at 10-50g per hl during the rehydration stage, either dissolved in sterile water at a ratio of 1:10 or added directly to the fermentation medium. Where yeast vitality is low, a supplementary addition of 5g per hl can be made directly into the fermentation tank.



QUICK REFERENCE

Recommended use:

Yeast propagation,
fermentation support,
oxidative stress prevention

Packaging options:

1kg



Shelf life:

12 months from production date

Storage:

Store in a cool, dry place, ideally below 10°C. Keep sealed. Use promptly once opened.

For technical guidance and advice, speak to our team.

Processing Aids

Liquor treatment, pH management and foam control. The details that keep your process consistent and your beer repeatable.



Processing Aids

Lactic Acid

DESCRIPTION

Lactic acid is a naturally occurring organic acid supplied at 80% concentration to food grade standard. It is used in the brewery primarily for liquor treatment, where it offers a clean, straightforward route to reducing mash and sparge liquor pH without contributing unwanted ions to the water profile.

Unlike mineral acids, lactic acid adds no sulphate, chloride or other ions to the liquor, making it the preferred choice where the brewer wants precise pH control without altering the ionic balance of the water. It is particularly well suited to lager and wheat beer production, where a neutral, clean flavour profile is important.

APPLICATIONS

Liquor treatment: Add directly to the liquor and mix thoroughly before use. The required addition rate depends on the alkalinity of the source water and the target mash pH.

As a starting point, trial additions should be made and pH checked with a calibrated meter. Typical addition rates are in the range of 1 to 5ml per litre of liquor, but this will vary considerably depending on water hardness and target pH.

For specific dosage rates, speak to our technical team.



QUICK REFERENCE

Recommended use:

Liquor treatment,
mash pH adjustment

Packaging options:

25L, 200L, IBC



Shelf life:

12 months from production date

Storage:

Store in original container at 10-15°C. Keep away from direct sunlight. Do not allow to freeze. Keep away from chlorine and chlorinated products.

For technical guidance and advice, speak to our team.



Processing Aids

Gypsum (Calcium Sulphate)

DESCRIPTION

Calcium sulphate, commonly known as gypsum, is a water treatment mineral used to adjust the ionic profile of brewing liquor. It is the primary source of both calcium and sulphate ions in liquor treatment, and its addition has a direct effect on mash pH, enzymatic activity, yeast health and the perceived bitterness and dryness of the finished beer.

Calcium is an essential brewing ion. It promotes enzyme activity during mashing, supports yeast flocculation and reduces oxalate levels in the wort, which helps to control beer stone formation over time. Sulphate accentuates hop-derived bitterness and contributes to a dry, clean finish, making calcium sulphate the natural choice for pale ales, bitters and hop-forward styles.

APPLICATIONS

Add directly to the mash or liquor and stir to dissolve before use. Weigh additions carefully; small changes in ion concentration can have a measurable effect on both process and flavour. Typical addition rates depend on source water composition and target ion levels, but are generally in the range of 0.1 to 1g per litre of liquor.

Use brewing water calculation software or consult our technical team to determine the correct addition for your water and beer style.

For specific dosage rates, speak to our technical team.



QUICK REFERENCE

Recommended use:

Liquor treatment, mash pH adjustment, hop enhancement

Packaging options:

25kg



Shelf life:

12 months from production date

Storage:

Store in a cool, dry place in a sealed container. Keep away from moisture.

For technical guidance and advice, speak to our team.



Processing Aids

Flake (Calcium Chloride)

DESCRIPTION

Calcium chloride is a water treatment mineral used to raise calcium and chloride ion concentrations in brewing liquor. Like calcium sulphate, it contributes calcium to the mash, supporting enzyme activity, yeast health and beer stone control. Its distinguishing characteristic is the chloride ion, which rounds out mouthfeel, enhances perceived body and brings out malt sweetness in the finished beer.

Where calcium sulphate sharpens bitterness and adds dryness, calcium chloride works in the opposite direction, making it the preferred choice for malt-forward styles including milds, stouts, porters and Scottish ales. The balance between sulphate and chloride in a liquor profile is one of the more practical tools a brewer has for fine-tuning beer character at the recipe stage.

APPLICATIONS

Add directly to the mash or liquor and stir to dissolve before use. Weigh additions carefully; the ratio of calcium chloride to calcium sulphate has a significant influence on the flavour balance of the finished beer. Typical addition rates depend on source water composition and target ion levels, but are generally in the range of 0.1 to 1g per litre of liquor.

Use brewing water calculation software or consult our technical team to determine the correct addition for your water and beer style.

For specific dosage rates, speak to our technical team.

QUICK REFERENCE

Recommended use:

Liquor treatment, malt character enhancement

Packaging options:

25kg

**Shelf life:**

12 months from production date

Storage:

Store in a cool, dry place in a sealed container. Keep away from moisture.

For technical guidance and advice, speak to our team.



Processing Aids

Epsom Salts

DESCRIPTION

Magnesium sulphate, commonly known as Epsom salts, provides both magnesium and sulphate ions to the liquor. Magnesium is an essential yeast nutrient, required in small quantities to support enzyme function and healthy fermentation, and is worth considering in very soft or demineralised water supplies.

Sulphate accentuates hop bitterness in a similar way to calcium sulphate, though with a harsher edge at higher concentrations. Magnesium sulphate is best used as a secondary sulphate source to complement rather than replace calcium sulphate; excess magnesium can contribute an unpleasant bitter or astringent character.

APPLICATIONS

Add directly to the mash or liquor and stir to dissolve before use. Magnesium sulphate is generally used at lower addition rates than calcium sulphate or calcium chloride. A typical target magnesium level in brewing liquor is 5 to 30ppm; additions beyond this range are unlikely to offer additional benefit and may negatively affect flavour.

Use brewing water calculation software or consult our technical team to determine whether an addition is warranted for your source water.

For specific dosage rates, speak to our technical team.



QUICK REFERENCE

Recommended use:

Liquor treatment, mash pH adjustment, hop enhancement

Packaging options:

25kg



Shelf life:

12 months from production date

Storage:

Store in a cool, dry place in a sealed container. Keep away from moisture.

For technical guidance and advice, speak to our team.



Processing Aids

Hot Liquor Treatment (HLT)

DESCRIPTION

HLT is a blend of sulphuric and hydrochloric acids formulated for brewing liquor treatment. Added to the cold liquor tank, it reduces alkalinity and contributes both sulphate and chloride ions to the water profile, making it a practical single-addition option for breweries looking to adjust pH and ion balance in one step.

At 5ml per hl, HLT reduces alkalinity by 18mg/L and raises sulphate by 6.5mg/L and chloride by 4.6mg/L. The relatively modest ion contribution at typical dosage rates means it is well suited to source waters that are already reasonably balanced and require only moderate correction.

APPLICATIONS

Liquor treatment: Add to the cold liquor tank and allow sufficient contact time for the acid to react with carbonates in the water before heating. Adding to cold rather than hot liquor helps prevent scale build-up on heating elements. HLT can also be used to fine-tune pH at later stages in the process, though lab trials are advisable before doing so to establish the correct dosage.

Important note: Do not allow this product to come into contact with metals in the brewhouse as it will cause corrosion, pitting and rusting.

For specific dosage rates, speak to our technical team.



QUICK REFERENCE

Recommended use:

Liquor treatment,
pH and ion profile adjustment

Packaging options:

25L, 200L, IBC



Shelf life:

12 months from production date

Storage:

Store in original container at 10-20°C. Keep away from direct sunlight. Keep away from chlorine and chlorinated products. Do not allow to freeze.

For technical guidance and advice, speak to our team.

Processing Aids

Aquatreat

DESCRIPTION

Aquatreat is a food grade sulphuric acid solution for brewing liquor treatment. It reduces alkalinity while contributing sulphate ions to the water profile, making it a straightforward choice for breweries targeting a drier, more hop-forward character in their liquor treatment programme.

At 5ml per hl, Aquatreat reduces alkalinity by 22 mg/L and raises sulphate levels by 21 mg/L. The higher sulphate contribution per unit of alkalinity reduction makes it a more efficient sulphate source than HLT, and worth considering where sulphate uplift is a specific objective.

APPLICATIONS

Liquor treatment: Add to the cold liquor tank and allow sufficient contact time for the acid to react with carbonates in the water before heating. Adding to cold rather than hot liquor helps prevent scale build-up on heating elements. Aquatreat can also be used to fine-tune pH at later stages in the process, though lab trials are advisable before doing so to establish the correct dosage.

Important note: Do not allow this product to come into contact with metals in the brewhouse as it will cause corrosion and rusting.

For specific dosage rates, speak to our technical team.



QUICK REFERENCE

Recommended use:

Liquor treatment, pH adjustment, sulphate addition

Packaging options:

25L, 200L, IBC



Shelf life:

12 months from production date

Storage:

Store in original container at 10-20°C. Keep away from direct sunlight. Keep away from chlorine and chlorinated products. Do not allow to freeze.

For technical guidance and advice, speak to our team.

Processing Aids

Mashtreat

DESCRIPTION

Mashtreat is a blend of calcium sulphate and calcium chloride for use in brewing liquor treatment. Added to the grist, it raises calcium, sulphate and chloride levels in a single addition, adjusting mash pH and contributing to the flavour character of the finished beer.

At 9g per hl, Mashtreat raises calcium by 20.7ppm, chloride by 8.4ppm and sulphate by 38.4ppm. Sulphate accentuates hop bitterness and dryness, while chloride rounds out mouthfeel and enhances perceived malt body. The balance between the two is one of the more practical tools available for shaping beer character at the recipe stage.

APPLICATIONS

Liquor treatment: Add to the grist prior to mashing, or split the addition across the mash and sparge liquor. Where the total dosage exceeds 75g per hl, dose two thirds with the grist and one third with the sparge to maintain an even calcium distribution and consistent pH throughout. Do not add to the hot liquor tank, as some constituents are insoluble and will remain in the tank rather than reaching the grist.

For specific dosage rates, speak to our technical team.

QUICK REFERENCE

Recommended use:

Liquor treatment, mash pH adjustment, ion profile adjustment

Packaging options:

20kg



Shelf life:

12 months from production date

Storage:

Store in a cool, dry place in a sealed container. Keep away from moisture.

For technical guidance and advice, speak to our team.



Processing Aids

Phosphoric Acid 81%

DESCRIPTION

Phosphoric Acid 81% is a clear, food grade solution used in brewing for two distinct purposes: liquor treatment and yeast acid washing. For liquor treatment, it reduces alkalinity without contributing chloride or sulphate ions, leaving the ionic balance of the water profile unchanged. This makes it particularly useful where alkalinity needs to come down but the sulphate-to-chloride ratio is already dialled in.

For yeast acid washing, phosphoric acid is used to reduce bacterial contamination in pitching yeast. When carried out correctly at low temperature and controlled pH, it eliminates bacteria with minimal impact on yeast viability. It does not remove wild yeast.

APPLICATIONS

Liquor treatment: Add to cold or hot liquor tank and mix thoroughly. Allow time for CO₂ to escape as excess carbonate is neutralised. The required addition rate depends on the alkalinity of the source water and the target pH. Note that phosphoric acid can react with calcium to form precipitates, potentially reducing calcium levels in the mash, worth considering if calcium is critical to your water profile. For specific dosage rates, speak to our technical team.

Yeast acid washing: Cool the yeast slurry and a 1:10 acid dilution to 2-5°C before starting. Mix the diluted acid into the slurry until pH 2.0-2.3 is reached. Hold for a maximum of 60-90 minutes with continuous stirring, then pitch the entire mixture directly into the fermenter. Do not store washed yeast, and do not wash compromised, long-stored, or high gravity yeast (above 8% ABV).

For specific dosage rates, speak to our technical team.

QUICK REFERENCE

Recommended use:

Liquor treatment,
yeast acid washing

Packaging options:

25L, 200L, IBC



Shelf life:

12 months from production date

Storage:

Store in original container at 10-15°C. Keep away from direct sunlight. Keep away from chlorine and chlorinated products. Do not allow to freeze.

For technical guidance and advice, speak to our team.

Processing Aids

Foam Doctor

DESCRIPTION

Foam Doctor is a food grade silicone-based antifoam for use in brewery fermentation. Its active component is polydimethylsiloxane (E900), supplied as a 10% emulsion ready for use. It knocks down foam rapidly on contact without affecting the fermentation or carrying any flavour impact into the finished beer.

Supplied ready to use, it can be diluted with soft or distilled water where very low addition rates are required.

APPLICATIONS

Fermentation: Add to the fermenter prior to or at the start of fermentation, or dose in-line on transfer from the whirlpool. The correct addition point will depend on where foam is proving problematic in your process. Typical dosage is 10 to 100ppm and is best established by trial. As with all antifoams, restraint is important; overdosing can lead to silicone carryover into the finished beer, which may affect head retention.

A CIP-grade silicone antifoam, Foam Doctor G205A, is also available.

For specific dosage rates or further information, please contact our technical team.

QUICK REFERENCE

Recommended use:

General antifoam

Packaging options:

5L, 25L



Shelf life:

12 months from production date

Storage:

Store in original container between 5 and 30°C.

For technical guidance and advice, speak to our team.

Miscellaneous



Packaging, Sugars, Disinfection and Brewery Sundries

Odds and ends that don't fit neatly anywhere else but that you'll notice pretty quickly if you run out of; the items that keep day-to-day brewery operations running.

Product Name	Description	Pack Sizes
IPA 70%	70% Isopropanol solution for rapid disinfection	25L, 200L
IPA 98%	98% Isopropanol solution for rapid disinfection	25L, 200L
MPG (Glycol)	Food Grade Monopropylene Glycol for use in chiller units	25L, 200L
Shives (RED)	Rankin red rubber membrane C band shives	250 PCS
Shives (CLEAR RIBBED)	Rankin clear plastic ribbed C band shives	250 PCS
Keystones	Rankin Keystones - K2 Cold and Hot fill	1000 PCS
Invert Sugar	Invert Sugar IN03	25L
Dextrose Powder	Dextrose Monohydrate powder, used to boost fermentable sugars	25kg
Lactose Powder	Lactose powder, used as an unfermentable sugar to add sweetness	25kg
Peracetic Test Strips	Semi-quantitative test for measuring peracetic acid content	100 PCS
pH Test Strips	pH indicator non-bleed strips	100 PCS
Water Test Strip	Semi-quantitative test for measuring water hardness	100 PCS
Phenolphthalein Test Strips	Semi-quantitative test used for testing causticity in solution	200 PCS







SKY LABS

• A SKY AGRO COMPANY •



SKY AGRO LTD

E-mail: sales@sky-agro.com

Tel.: +44 (0) 1327 828001

www.sky-agro.com