





- Prompt-pair or model-pair contrast
- Penalize unsafe or ungrounded tokens

Constructive Decoding

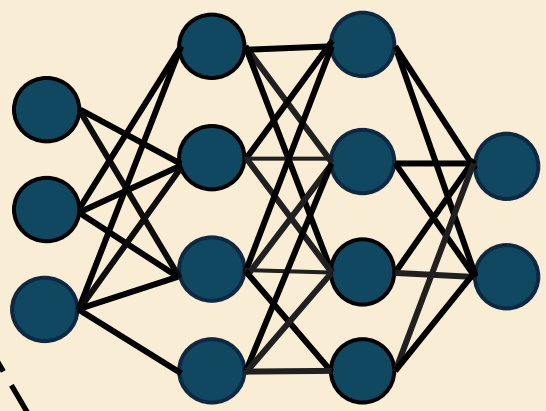


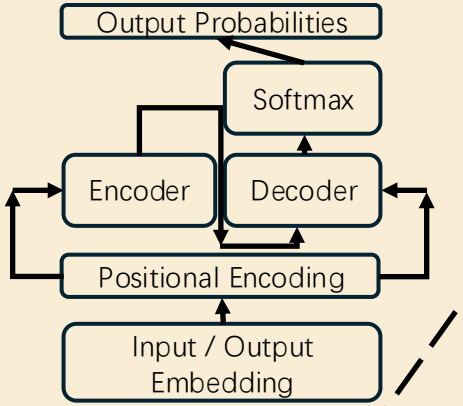


Dynamic/Context-Aware

- Adjust decoding by context complexity
- Dynamic attention and layer fusion

Frozen LLM



Input Prompt



Token Sampling

Selected Token



- Use external references
- Constrain logits to facts

Reference-Based





Safety Signals / Rules

- Contrast expert logits
- Route to safe models
- Apply reward signals

Modified logits & Distribution

Logit Manipulation &Distribution Shaping

- Combine signals from decoding strategies& external rules
- Reweight / suppress logits for risky or unsupported tokens