

Apply filters to SQL queries

Project description

I used SQL filters to investigate security issues involving login attempts and employee machines in the log_in_attempts and employees tables. I used AND, OR, NOT, LIKE and comparison operators to narrow the data to the records I needed.

Retrieve after hours failed login attempts

```
SELECT *  
FROM log_in_attempts  
WHERE login_time > '18:00' AND success = 0;
```

```
MariaDB [organization]> SELECT *  
-> FROM log_in_attempts  
-> WHERE login_time > '18:00' AND success = 0;
```

event_id	username	login_date	login_time	country	ip_address	success
2	apatel	2022-05-10	20:27:27	CAN	192.168.205.12	0
18	pwashing	2022-05-11	19:28:50	US	192.168.66.142	0
20	tshah	2022-05-12	18:56:36	MEXICO	192.168.109.50	0
28	aestrada	2022-05-09	19:28:12	MEXICO	192.168.27.57	0
34	drosas	2022-05-11	21:02:04	US	192.168.45.93	0
42	cgriffin	2022-05-09	23:04:05	US	192.168.4.157	0
52	cjackson	2022-05-10	22:07:07	CAN	192.168.58.57	0
69	wjaffrey	2022-05-11	19:55:15	USA	192.168.100.17	0
82	abernard	2022-05-12	23:38:46	MEX	192.168.234.49	0
87	apatel	2022-05-08	22:38:31	CANADA	192.168.132.153	0
96	ivelasco	2022-05-09	22:36:36	CAN	192.168.84.194	0
104	asundara	2022-05-11	18:38:07	US	192.168.96.200	0
107	bisles	2022-05-12	20:25:57	USA	192.168.116.187	0
111	aestrada	2022-05-10	22:00:26	MEXICO	192.168.76.27	0
127	abellmas	2022-05-09	21:20:51	CANADA	192.168.70.122	0
131	bisles	2022-05-09	20:03:55	US	192.168.113.171	0
155	cgriffin	2022-05-12	22:18:42	USA	192.168.236.176	0
160	jclark	2022-05-10	20:49:00	CANADA	192.168.214.49	0
199	yappiah	2022-05-11	19:34:48	MEXICO	192.168.44.232	0

```
19 rows in set (0.003 sec)  
  
MariaDB [organization]>
```

This returns failed logins after 18:00, when the business day ends. AND requires both conditions to be true.

Retrieve login attempts on specific dates

```
SELECT *  
FROM log_in_attempts  
WHERE login_date = '2022-05-09' OR login_date = '2022-05-08';
```

```

MariaDB [organization]> SELECT *
-> FROM log_in_attempts
-> WHERE login_date = '2022-05-09' OR login_date = '2022-05-08';

```

event_id	username	login_date	login_time	country	ip_address	success
1	jrafael	2022-05-09	04:56:27	CAN	192.168.243.140	1
3	dkot	2022-05-09	06:47:41	USA	192.168.151.162	1
4	dkot	2022-05-08	02:00:39	USA	192.168.178.71	0
8	bisles	2022-05-08	01:30:17	US	192.168.119.173	0
12	dkot	2022-05-08	09:11:34	USA	192.168.100.158	1
15	lyamamot	2022-05-09	17:17:26	USA	192.168.183.51	0
24	arusso	2022-05-09	06:49:39	MEXICO	192.168.171.192	1
25	sbaelish	2022-05-09	07:04:02	US	192.168.33.137	1
26	apatel	2022-05-08	17:27:00	CANADA	192.168.123.105	1
28	aestrada	2022-05-09	19:28:12	MEXICO	192.168.27.57	0
30	yappiah	2022-05-09	03:22:22	MEX	192.168.124.48	1
32	acook	2022-05-09	02:52:02	CANADA	192.168.142.239	0
36	asundara	2022-05-08	09:00:42	US	192.168.78.151	1
38	sbaelish	2022-05-09	14:40:01	USA	192.168.60.42	1
39	yappiah	2022-05-09	07:56:40	MEXICO	192.168.57.115	1
42	cgriffin	2022-05-09	23:04:05	US	192.168.4.157	0
43	mcouliba	2022-05-08	02:35:34	CANADA	192.168.16.208	0
44	daquino	2022-05-08	07:02:35	CANADA	192.168.168.144	0
47	dkot	2022-05-08	05:06:45	US	192.168.233.24	1
49	asundara	2022-05-08	14:00:01	US	192.168.173.213	0
53	nmason	2022-05-08	11:51:38	CAN	192.168.133.188	1
56	acook	2022-05-08	04:56:30	CAN	192.168.209.130	1
58	ivelasco	2022-05-09	17:20:54	CAN	192.168.57.162	0
61	dtanaka	2022-05-09	09:45:18	USA	192.168.98.221	1
65	aalonso	2022-05-09	23:42:12	MEX	192.168.52.37	1
66	aestrada	2022-05-08	21:58:32	MEX	192.168.67.223	1
67	abernard	2022-05-09	11:53:41	MEX	192.168.118.29	1
68	masb	2022-05-09	08:00:00	MEX	192.168.118.29	1

This returns logins from 2022-05-08 and 2022-05-09, the day of the suspicious event and the day before. OR returns a row if either date matches.

Retrieve login attempts outside of Mexico

```

SELECT *
FROM log_in_attempts
WHERE NOT country LIKE 'MEX%';

```

```
MariaDB [organization]> SELECT *
-> FROM log_in_attempts
-> WHERE NOT country LIKE 'MEX%';
```

event_id	username	login_date	login_time	country	ip_address	success
1	jrafael	2022-05-09	04:56:27	CAN	192.168.243.140	1
2	apatel	2022-05-10	20:27:27	CAN	192.168.205.12	0
3	dkot	2022-05-09	06:47:41	USA	192.168.151.162	1
4	dkot	2022-05-08	02:00:39	USA	192.168.178.71	0
5	jrafael	2022-05-11	03:05:59	CANADA	192.168.86.232	0
7	eraab	2022-05-11	01:45:14	CAN	192.168.170.243	1
8	bisles	2022-05-08	01:30:17	US	192.168.119.173	0
10	jrafael	2022-05-12	09:33:19	CANADA	192.168.228.221	0
11	sgilmore	2022-05-11	10:16:29	CANADA	192.168.140.81	0
12	dkot	2022-05-08	09:11:34	USA	192.168.100.158	1
13	mrah	2022-05-11	09:29:34	USA	192.168.246.135	1
14	sbaelish	2022-05-10	10:20:18	US	192.168.16.99	1
15	lyamamot	2022-05-09	17:17:26	USA	192.168.183.51	0
16	mcouliba	2022-05-11	06:44:22	CAN	192.168.172.189	1
17	pwashing	2022-05-11	02:33:02	USA	192.168.81.89	1
18	pwashing	2022-05-11	19:28:50	US	192.168.66.142	0
19	jhill	2022-05-12	13:09:04	US	192.168.142.245	1
21	iuduike	2022-05-11	17:50:00	US	192.168.131.147	1
25	sbaelish	2022-05-09	07:04:02	US	192.168.33.137	1
26	apatel	2022-05-08	17:27:00	CANADA	192.168.123.105	1
29	bisles	2022-05-11	01:21:22	US	192.168.85.186	0
31	acook	2022-05-12	17:36:45	CANADA	192.168.58.232	0
32	acook	2022-05-09	02:52:02	CANADA	192.168.142.239	0
33	zbernal	2022-05-11	02:52:10	US	192.168.72.59	1
34	drosas	2022-05-11	21:02:04	US	192.168.45.93	0
36	asundara	2022-05-08	09:00:42	US	192.168.78.151	1

'MEX%' matches both MEX and MEXICO, and NOT excludes them, so only logins from other countries remain.

Retrieve employees in Marketing

```
SELECT *
FROM employees
WHERE department = 'Marketing' AND office LIKE 'East%';
```

```
MariaDB [organization]> SELECT *
-> FROM employees
-> WHERE department = 'Marketing' AND office LIKE 'East%';
```

employee_id	device_id	username	department	office
1000	a320b137c219	elarson	Marketing	East-170
1052	a192b174c940	jdarosa	Marketing	East-195
1075	x573y883z772	fbautist	Marketing	East-267
1088	k865l965m233	rgosh	Marketing	East-157
1103	NULL	randerss	Marketing	East-460
1156	a184b775c707	dellery	Marketing	East-417
1163	h679i515j339	cwilliam	Marketing	East-216


7 rows in set (0.008 sec)

```
MariaDB [organization]>
```

This returns Marketing employees in East building offices, such as East-170. It returned 7 rows.

Retrieve employees in Finance or Sales

```
SELECT *  
FROM employees  
WHERE department = 'Finance' OR department = 'Sales';
```

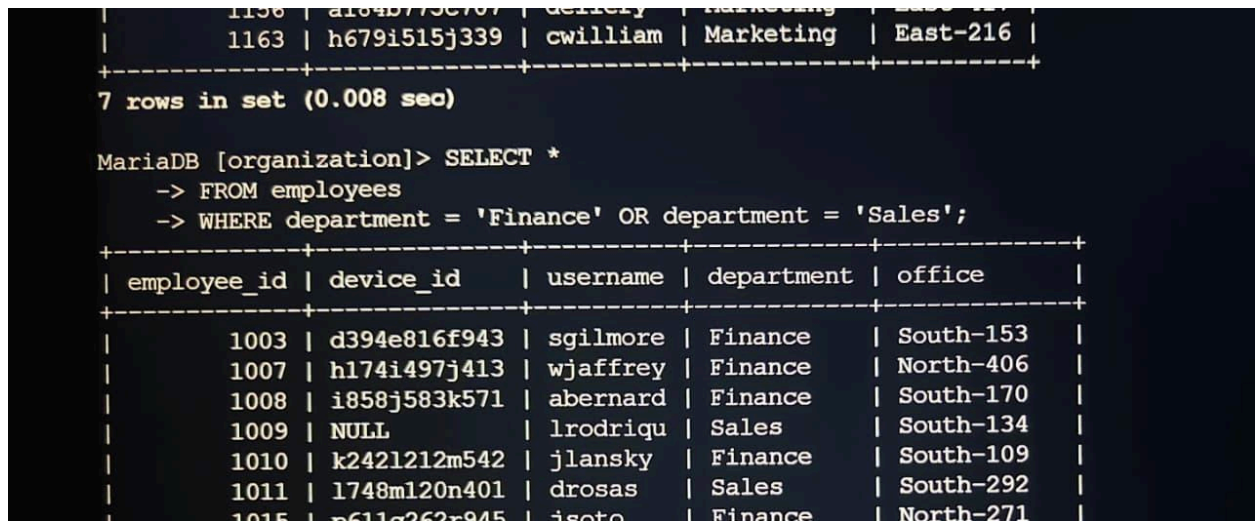


```
MariaDB [organization]> SELECT *  
-> FROM employees  
-> WHERE department = 'Finance' OR department = 'Sales';
```

employee_id	device_id	username	department	office
1136	a184b775c767	celery	Marketing	East-170
1163	h679i515j339	cwilliam	Marketing	East-216
7 rows in set (0.008 sec)				
1003	d394e816f943	sgilmore	Finance	South-153
1007	h174i497j413	wjaffrey	Finance	North-406
1008	i858j583k571	abernard	Finance	South-170
1009	NULL	lrodriqu	Sales	South-134
1010	k242l212m542	jlansky	Finance	South-109
1011	l748m120n401	drosas	Sales	South-292
1015	p611q262r945	isoto	Finance	North-271

This returns employees in either department, so both full conditions are written out.

Retrieve all employees not in IT

```
SELECT *  
FROM employees  
WHERE NOT department = 'Information Technology';
```

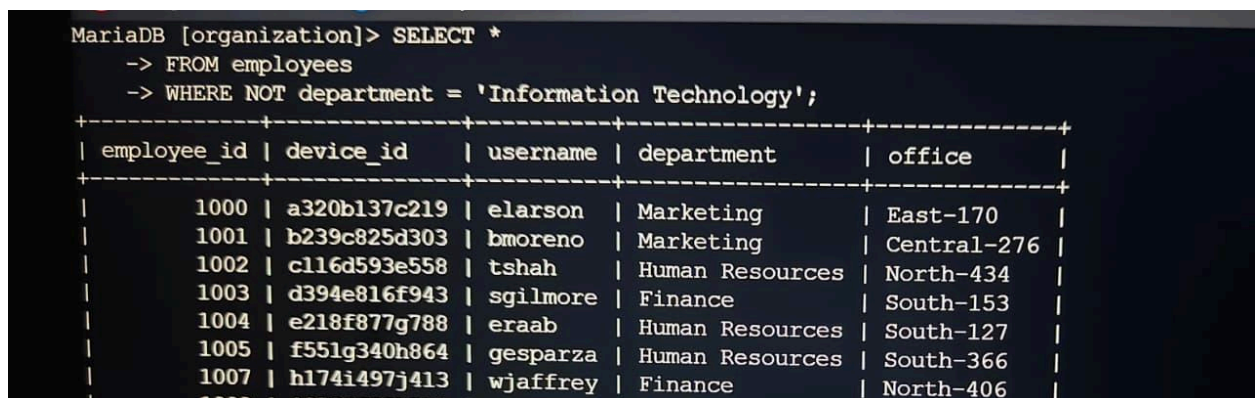

```
MariaDB [organization]> SELECT *  
-> FROM employees  
-> WHERE NOT department = 'Information Technology';
```

employee_id	device_id	username	department	office
1000	a320b137c219	elarson	Marketing	East-170
1001	b239c825d303	bmoreno	Marketing	Central-276
1002	c116d593e558	tshah	Human Resources	North-434
1003	d394e816f943	sgilmore	Finance	South-153
1004	e218f877g788	eraab	Human Resources	South-127
1005	f551g340h864	gesparza	Human Resources	South-366
1007	h174i497j413	wjaffrey	Finance	North-406
1008	i858j583k571	abernard	Finance	South-170
1009	NULL	lrodriqu	Sales	South-134
1010	k242l212m542	jlansky	Finance	South-109

Summary

I applied SQL filters to find failed after-hours logins, logins on specific dates, and logins from outside Mexico. I also found employee machines that need updates by department and office. This showed me how AND, OR, NOT and LIKE narrow results to what a security investigation needs.