

Figure 9-4 zCX Docker User Management Configuration for provision workflow

For the reconfigure workflow, navigate to the "zCX Docker User Management Configuration" substep as shown in Figure 9-5.

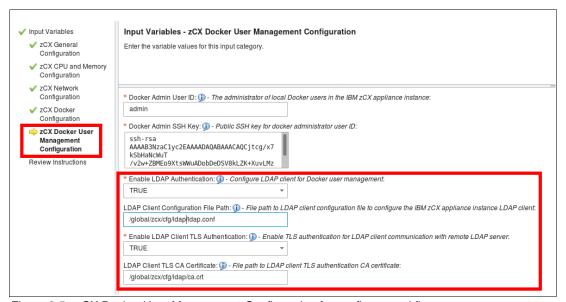


Figure 9-5 zCX Docker User Management Configuration for configure workflow

## 9.3 Resources on the provisioning server and verifying that LDAP is enabled

This section continues with the example in Example 9-2 on page 229. The zCX instance is configured to use the previously defined **Idap.conf** and to enable TLS authentication. The zCX instance runs with IP 129.40.23.85.