

Note: The default password for all these users is whatever the default password was originally set to. This should be the same initial password that you had before you were forced to change it at login, unless you changed the **couchdb** configuration Figure 4-22 on page 170. This will also be the password for reset passwords that are sent to users who forget their password. Users must change their passwords immediately upon entering the console for the first time.

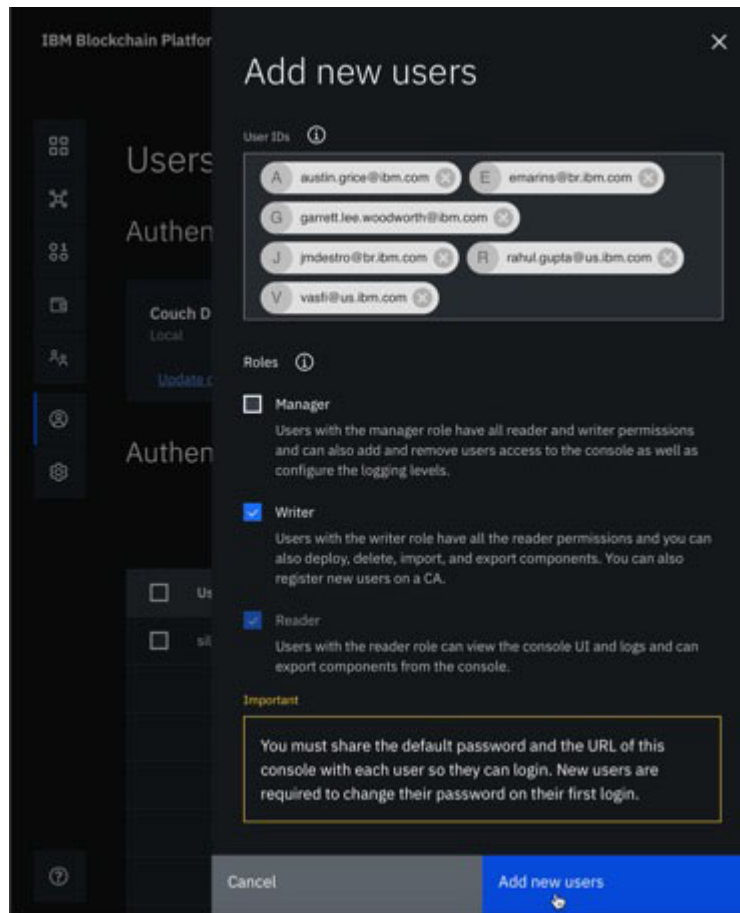


Figure 4-23 Managing console -2

Figure 4-24 on page 172 shows the users that have been added.

Note for long-term reference: To operate components that are deployed by the console, you need both permission and the cryptographic material for that component. Currently, the console stores the cryptographic material for new components in the user's web browser. Thus, if they want to give someone else access to that component, they must export the credentials (from their wallet) and securely transport it to the other individual (and that individual can add them to their wallet). No action is required at this time, other than keeping this convention in mind as you manage the console.

For more details on the credential transferring process visit this website:
<https://cloud.ibm.com/docs/services/blockchain?topic=blockchain-ibp-console-identities#ibp-console-identities-wallet>