

```
oc adm manage-node wrknode01.domain.example.com --schedulable=true
NAME                                STATUS    ROLES    AGE      VERSION
wrknode01.domain.example.com        Ready     compute  3h       v1.11.0+d4cacc0
oc adm manage-node wrknode02.domain.example.com --schedulable=true
NAME                                STATUS    ROLES    AGE      VERSION
wrknode02.domain.example.com        Ready     compute  3h       v1.11.0+d4cacc0
```

19. Remove the compute label from the OpenShift Master-Infrastructure node:

```
oc label node mstnode01.domain.example.com
node-role.kubernetes.io/compute=false --overwrite
node/mstnode01.domain.example.com labeled
```

20. Use the URL ([https://icp-console.apps.gdl.stglabs.ibm.com:443](https://icp-console.apps.gdl.stglabs.ibm.com/console/welcome)) to connect to the IBM Multicloud Manager management console as shown in Figure 6-7.

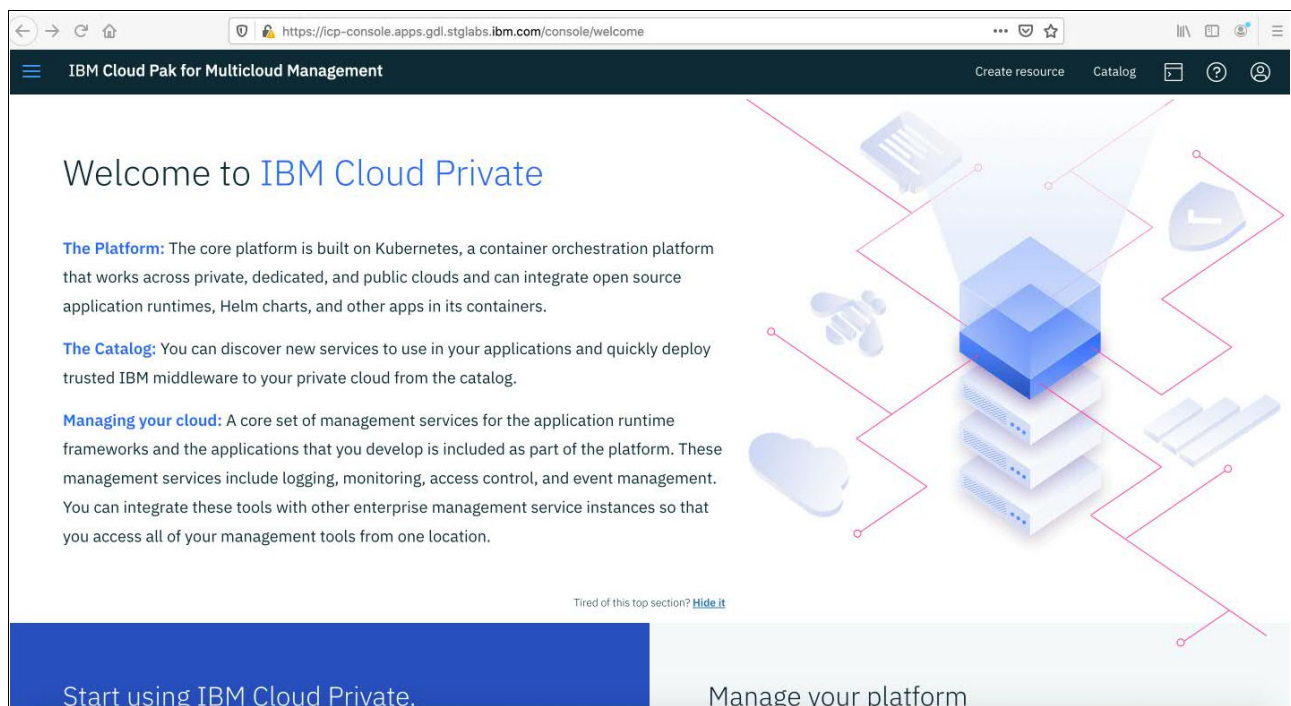


Figure 6-7 IBM Cloud Private console

You can find more details about IBM Cloud Pak for Multicloud Management installation at the following website:

<https://ibm.co/20CyXeS>