

ERC Starting Grant 2026

Part B1

Flexible Intelligence through Neurocomputational Design

FIND

Principal Investigator: Dr. Mikkel Elle Lepperød
Host Institution: Simula Research Laboratory, Norway
Duration: 60 months
Primary Panel: PE6 — Computer Science and Informatics

Abstract

Current AI systems cannot selectively store and retrieve information across thousands of timesteps—a capability biological brains achieve routinely through distributed memory systems. Transformers forget beyond their context window; state space models compress everything into fixed-size state; and memory-augmented networks lack causal models to decide what is worth storing. FIND develops **PAM** (**P**redictive **A**ctive temporal coding with distributed **M**emory), a novel brain-inspired architecture where modules of neurons read and write to local long-term memory, combining temporal predictive coding, hyperdimensional computing, and active inference into a unified framework.

PAM combines three mechanisms: (1) *Distributed modular specialization* where each module maintains dedicated content-addressable memory; (2) *Temporal predictive coding* where prediction errors drive memory updates and learning; and (3) *Active inference* where action selection minimizes uncertainty. Our preliminary results demonstrate PAM’s viability at scale: 100% recognition accuracy on CORE50 (50 objects) with **zero catastrophic forgetting by construction**; **98.2% online continual learning accuracy** across 120K samples in 55 seconds— $12\times$ faster than gradient-based methods; and **24.7% exact match on ARC** (the Abstraction and Reasoning Corpus) with only 1.47M parameters, approximately $2\times$ GPT-4o’s 12% at $>1000\times$ fewer parameters.

FIND will develop PAM through three work packages: **WP1** establishes temporal predictive coding with distributed memory for continual learning and long-range temporal reasoning; **WP2** extends this to compositional reasoning and program synthesis through neurosymbolic HDC integration; and **WP3** stress-tests the system in demanding open-ended environments (Memory Maze, Minecraft, Factorio) requiring planning and adaptation across $>10,000$ timesteps.

FIND: Flexible Intelligence through Neurocomputational Design

1 Part I of the Scientific Proposal

We live in time. Memory bridges past and present, enabling agents to learn from experience and make informed decisions. Humans develop internal world models for planning and reasoning; replicating this in machines is the next step toward flexible AI [1]. Current AI struggles to generalise [2], lacking long-term memory [3], causal understanding [4], and life-long learning without catastrophic forgetting [5].

Consider an agent managing a Factorio production chain (Figure 2). It discovers copper wire requires copper plates (step 2,000) and circuits require wire plus iron (step 8,000), then encounters a blueprint requiring 50 circuits at step 15,000. It must recall the dependency chain across >10,000 timesteps, reason causally about bottlenecks, and adapt its layout. Current systems cannot do this: transformers cannot attend across 10,000 steps [6]; SSMs compress dependencies into fixed-size state [7]; MANNs lack causal models to identify bottlenecks [8]. **How can systems intelligently select what to retain, discard, and retrieve to learn across long temporal sequences?**

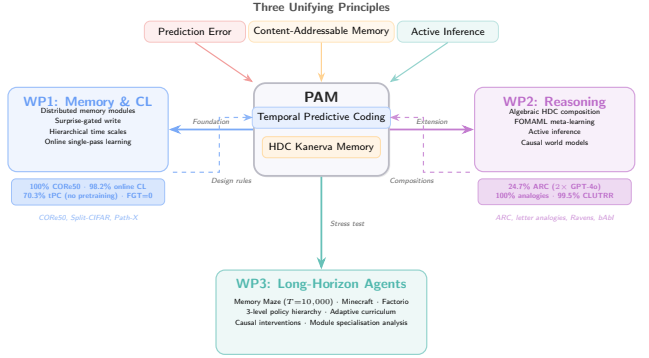


Figure 1: Conceptual overview of FIND. PAM (centre) unifies temporal predictive coding and HDC-based content-addressable memory. Three work packages build outward: **WP1** establishes the memory and continual learning foundation; **WP2** extends with compositional reasoning and causal world models; **WP3** stress-tests in demanding long-horizon environments. Preliminary results (coloured boxes) validate each WP’s core claims.



Figure 2: The capability gap FIND addresses. An agent discovers dependencies thousands of steps apart and must later recall and compose them under a new goal. This requires selective storage, content-addressable recall, and causal reasoning across >10,000 timesteps—beyond current architectures (bottom).

1.1 Ground-breaking nature and impact

FIND proposes a paradigm shift drawing inspiration from biological memory systems. We develop **PAM** (**P**redictive **A**ctive temporal coding with distributed **M**emory), a flat modular architecture where complexity arises from learned routing and memory interactions, operating through:

- Specialized modules with dedicated Kanerva memory [9, 10]
- HDC symbolic representations [11] retained in memory
- Learned orchestration for dynamic information routing
- Temporal predictions via predictive coding; action selection via active inference [12, 13]

FIND’s novelty lies at the intersection of three established fields in a configuration no prior system has achieved simultaneously:

- **Temporal predictive coding** [14] with **distributed external memory**—not just recurrent state: prior tPC models store context solely in hidden activations; FIND externalises memory into content-addressable HDC slots persistent across thousands of timesteps.
- **Memory-augmented networks** [8] with **biologically-grounded iterative inference**—not single-pass read/write: prior MANNs use a single forward pass to address memory; FIND uses iterative predictive-coding inference to resolve ambiguous queries, yielding a 1.75× recall advantage at $\sigma=0.4$.

- **Hyperdimensional computing [11] embedded as the storage format of a gradient-trained system**—not as a standalone symbolic method: prior HDC systems operate outside neural training loops; FIND integrates HDC binding directly into the differentiable memory update, enabling end-to-end learning.

Table 1 situates FIND against the state of the art. No existing system combines all four capabilities.

Table 1: Positioning of PAM against existing approaches. Only PAM combines external distributed memory, iterative inference, symbolic binding, and active inference in a single end-to-end trainable architecture.

System	External Memory	Iterative Inference	Symbolic Binding	Active Inference
NTM / DNC [8, 15]	✓	—	—	—
Kanerva Machine [9]	✓	—	—	—
Temporal PC [14]	—	✓	—	—
HDC systems [11]	—	—	✓	—
S4 / Mamba [7]	— (compressed state)	—	—	—
Active PC [13]	—	✓	—	✓
PAM (FIND)	✓	✓	✓	✓

1.2 State of the art, knowledge needs, and project objectives

Temporal memory and predictive coding

A key challenge in AI is creating memory systems comparable to the brain. RAG [16, 17] and agentic systems like MemGPT [18] manage context through external plumbing, but these sidestep bottom-up lifelong learning and struggle with out-of-distribution scenarios [2].

The core challenge is separating memory storage from computation [19, 20]. MANNs—NTMs [15], DNCs [8], Kanerva Machines [9]—address this partially. HDC extends sparse distributed memories with symbolic binding [11, 21]. Long-context transformers (Infini-Attention [22]) extend windows but do not solve selective storage. Modern SSMs—Mamba-2 [23], xLSTM [24]—achieve efficient sequence processing but compress into fixed-size state.

Predictive coding (PC) minimizes prediction errors between expectations and inputs [12, 25]. Extensions to active [13] and temporal PC [14] enable biologically plausible cognitive maps. Test-time training (TTT) [26] shares PAM’s iterative adaptation principle but modifies the full model rather than memory slots. **However, current PC models rely on Markov assumptions, unable to handle long-term credit assignment.**

Causal reasoning, world models, and compositional understanding

A causal world model represents generative mechanisms enabling counterfactual reasoning [4, 27]. Recent models—JEPA [28], DINO-WM [29], GAIA-1 [30]—show promise, but current benchmarks operate at irrelevant timescales: 2000 steps [31] vs. desert ants maintaining memories across 200 000 steps [32].

A complementary gap is *compositional reasoning*: factorizing knowledge into reusable subspaces for novel recombinations. The ARC benchmark [33] exemplifies this—tasks require recognising that transformations *compose* algebraically. FIND addresses this through HDC binding (bind, unbind, superposition) within the same space used for memory.

Cognitive map learning has been pursued in neuroscience [34] and AI [35], including by our lab [36–39], but these lack a unified theory of perception, cognition, and action—the gap FIND addresses.

Adaptive learning

Life-long learning requires managing information without catastrophic forgetting. Current approaches span regularization, replay, and Bayesian methods [5, 40]; we have explored generative stability [41] and plasticity [42]. FIND addresses this through HDC [11]: binding memories as compositional vectors enables fast retrieval and symbolic queries without retraining.

1.3 Research strategy and objectives

Central hypothesis: Predictive coding over content-addressable distributed memory slots is both necessary and sufficient for selective long-horizon recall—the ability to store, retrieve, and compose information across thousands of timesteps without catastrophic forgetting. We decompose this into three testable sub-hypotheses:

- **H1 (WP1):** Non-parametric HDC-structured memory achieves zero-forgetting continual learning that no gradient-based method can guarantee—our CORe50 results (100% recognition, 98.2% online CL accuracy) confirm this.
- **H2 (WP2):** Compositional binding in HDC space enables zero-shot generalisation to novel transformation compositions, with distributed memory as a load-bearing component of test-time program synthesis—PAMNCA ablations attribute 30–43% of performance to memory, growing with compute budget.
- **H3 (WP3):** Memory-augmented agents outperform compressed-state agents (SSMs, Transformers) specifically on tasks requiring recall across $>5,000$ timesteps.

We address this through three objectives and corresponding work packages:

- **Objective 1 / WP1: Temporal Predictive Coding with Distributed Memory.** Develop the foundational PAM architecture that processes information over different time scales through temporal predictive coding with distributed memory modules.
- **Objective 2 / WP2: Causal Reasoning and Compositional Understanding.** Extend PAM with active inference, neurosymbolic integration, and subspace-based compositional reasoning for causal world model learning.
- **Objective 3 / WP3: Long-Horizon Adaptation in Open-Ended Environments.** Stress-test the complete PAM system in demanding environments (mazes, Minecraft, Factorio) that require sophisticated planning, resource management, and long-horizon adaptation.

Theoretical approach. PAM combines three mechanisms:

1. *Distributed modular specialization:* Specialized modules with dedicated Kanerva memory [9], routed via Gumbel-softmax program induction iteratively over n stages.
2. *Temporal predictive coding:* Prediction errors drive memory updates and model learning.
3. *Active inference:* Action selection minimizes uncertainty, enabling efficient exploration and causally relevant memory storage.

PAM uses content-addressable memory with retrieval via similarity between z_t^m and stored basis vectors h_i^m , with exponential maps [43] for closed-form Riemannian updates. HDC [11, 43] bridges neural and symbolic approaches, enabling compositional reasoning through binding operations (Figure 3).

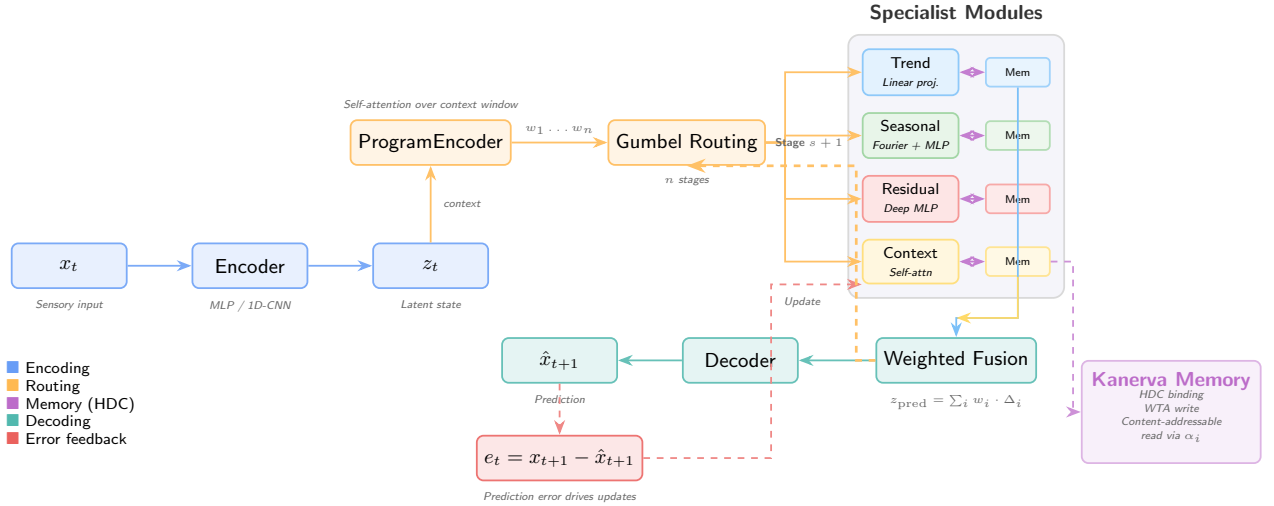


Figure 3: PAM architecture. Sensory input x_t is encoded into latent state z_t . A ProgramEncoder infers routing weights via self-attention over the context window. Gumbel-softmax routing selects among four specialist modules (Trend, Seasonal, Residual, Context), each with dedicated Kanerva memory using HDC binding for content-addressable read/write. The routing is applied iteratively over n stages. Module outputs are fused into a prediction $\hat{x}_{t+1}$; prediction errors drive parameter updates. The module inventory is task-dependent (shown here for temporal forecasting).

Preliminary results. The BioAI group has developed FIND’s foundations through neurocomputational memory research: grid/place/border cells emerge spontaneously in AI agents [36], orthogonal remapping encodes context [37–39], NCA enables self-organizing module communication [44], one-shot

memory transfer [45], and abstract reasoning [46]. The tPC-KM system achieves 98.1% exact recall at $\sigma=0.4$ ($1.75\times$ over feedforward) and $3.75\times$ less forgetting than tPC-alone (Figure 4).

WP1: Memory and continual learning. Beyond the MNIST benchmark, PAM achieves **100% recognition accuracy** on COrE50 (50 real-world objects, $T=10,000$ steps) with both pretrained and raw pixel features. On the official COrE50-NI online continual learning protocol (test-then-train, single pass, no task boundaries), PAM achieves **98.2% online accuracy** across 8 experiences (120K samples) in 55 seconds— $12\times$ faster than gradient-based replay methods—with zero catastrophic forgetting by construction and positive backward transfer. With PAM’s own tPC encoder (zero pretraining), the system reaches **70.3% per-experience accuracy** while learning both representations and memory online—the only continual learning system that operates without a pretrained backbone.

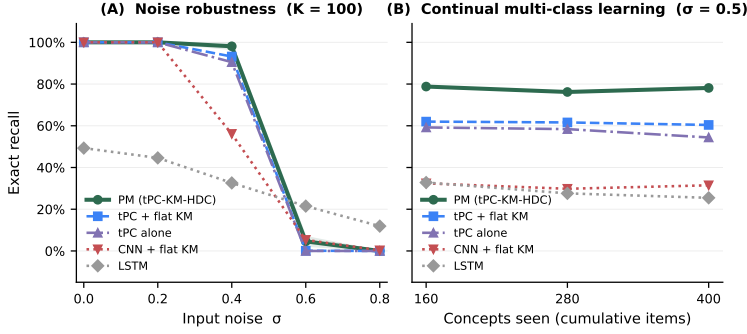


Figure 4: Preliminary PAM results (WP1 foundation). (A) Exact recall vs. input noise σ ($K=100$ items, 20 trials). Iterative inference (PAM, tPC-KM) outperforms feedforward encoding (CNN-KM) by $1.75\times$ at $\sigma=0.4$. (B) Exact recall across three sequential class phases ($\sigma=0.5$). PAM maintains $\approx 78\%$ recall across all phases; HDC binding prevents inter-class interference as new concepts accumulate, reducing forgetting $3.75\times$ versus tPC alone.

learning approach. Separately, our HDC system achieves 100% on direct analogies (with 200 distractors), 99.5% on CLUTRR 2-hop relational reasoning, and 100% on Raven’s Progressive Matrices.

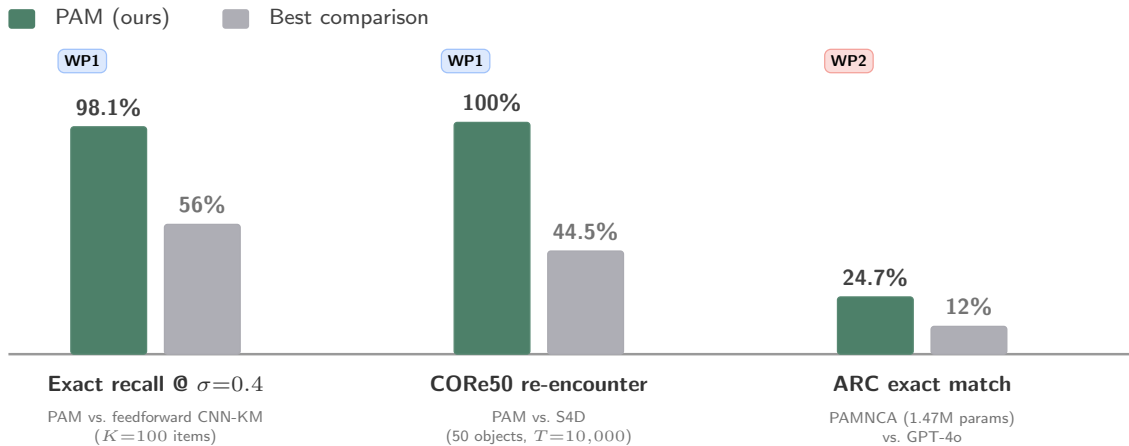


Figure 5: Headline preliminary results. PAM against the strongest comparison on each benchmark: noisy sequence recall at $\sigma=0.4$ (WP1 foundation), COrE50 re-encounter recognition after $T=10,000$ steps (WP1), and ARC program synthesis via test-time training (WP2).

PAM makes two testable predictions unique to its architecture: (1) non-parametric memory achieves *mathematically guaranteed* zero forgetting while maintaining recognition accuracy—our COrE50 experiments confirm 100% recognition versus the S4D baseline’s 44.5% re-encounter accuracy; (2) distributed memory is *necessary* for program synthesis via test-time adaptation, with its contribution growing with task complexity—our PAMNCA ablations support this (30% at TTT=500, 43% at TTT=1000).

1.4 Major expected outcomes

Science: A theoretical framework unifying predictive coding, distributed memory, and active inference beyond Markov assumptions. Understanding of how modular specialization emerges from predictive principles.

Technology: PAM as open-source framework with benchmarks spanning forecasting (ETT, Weather), long-range memory (Path-X, Memory Maze), and continual learning. Orchestration algorithms with reproducible evaluation suites.

Society: Foundations for AI with principled memory applicable to healthcare (patient timelines), industrial automation (Factorio-style planning), and environmental monitoring.

Success criteria: (i) $\geq 90\%$ recall at $\sigma=0.3$ and MSE within 10% of PatchTST (WP1); (ii) $>40\%$ ARC exact match, extending current 24.7% (WP2); (iii) >10 pp over DQN on Memory Maze at $T>5,000$ (WP3). Team: PI (50%), one postdoc (ML systems), two PhDs; 4-tier benchmark hierarchy (Part II).

References

- [1] Y. LeCun. *A Path Towards Autonomous Machine Intelligence*. <https://openreview.net/pdf?id=BZ5a1r-kVsf>. 2022.
- [2] Y. Razeghi, R. L. L. IV, M. Gardner, and S. Singh. “Impact of Pretraining Term Frequencies on Few-Shot Reasoning”. In: *CoRR* abs/2202.07206 (2022). arXiv: 2202.07206.
- [3] J. Pasukonis, T. P. Lillicrap, and D. Hafner. “Evaluating Long-Term Memory in 3D Mazes”. In: *CoRR* abs/2210.13383 (2022). arXiv: 2210.13383.
- [4] J. Richens and T. Everitt. “Robust agents learn causal world models”. In: *CoRR* abs/2402.10877 (2024). arXiv: 2402.10877.
- [5] L. Wang, X. Zhang, H. Su, and J. Zhu. “A Comprehensive Survey of Continual Learning: Theory, Method and Application”. In: *IEEE Transactions on Pattern Analysis and Machine Intelligence* 46.8 (Aug. 2024), pp. 5362–5383.
- [6] T. Ni, M. Ma, B. Eysenbach, and P. Bacon. “When Do Transformers Shine in RL? Decoupling Memory from Credit Assignment”. In: *CoRR* abs/2307.03864 (2023). arXiv: 2307.03864.
- [7] A. Gu, K. Goel, and C. Ré. “Efficiently Modeling Long Sequences with Structured State Spaces”. In: *CoRR* abs/2111.00396 (2021). arXiv: 2111.00396.
- [8] A. Graves et al. “Hybrid computing using a neural network with dynamic external memory”. In: *Nature* 538.7626 (Oct. 2016), pp. 471–476.
- [9] Y. Wu, G. Wayne, A. Graves, and T. P. Lillicrap. “The Kanerva Machine: A Generative Distributed Memory”. In: *6th International Conference on Learning Representations, ICLR 2018, Vancouver, BC, Canada, April 30 - May 3, 2018, Conference Track Proceedings*. OpenReview.net, 2018. arXiv: 1804.01756.
- [10] P. Kanerva. *Sparse Distributed Memory*. MIT Press, 2003.
- [11] P. Kanerva. “Hyperdimensional Computing: An Introduction to Computing in Distributed Representation with High-Dimensional Random Vectors”. In: *Cognitive Computation* 1.2 (Jan. 2009), pp. 139–159.
- [12] K. Friston. “The free-energy principle: a unified brain theory?”. In: *Nature Reviews Neuroscience* 11.2 (Jan. 2010), pp. 127–138.
- [13] R. P. N. Rao, D. C. Gklezakos, and V. Sathish. “Active Predictive Coding: A Unifying Neural Model for Active Perception, Compositional Learning, and Hierarchical Planning”. In: *Neural Computation* 36.1 (Jan. 2023), pp. 1–32.
- [14] B. Millidge, M. Tang, M. Osanlouy, N. S. Harper, and R. Bogacz. “Predictive coding networks for temporal prediction”. In: *PLOS Computational Biology* 20.4 (Apr. 2024). Ed. by P. E. Latham, e1011183.
- [15] A. Graves et al. “Neural Turing Machines”. In: *arXiv [1410.5401]* (2014). arXiv: 1410.5401.
- [16] P. Lewis et al. “Retrieval-Augmented Generation for Knowledge-Intensive NLP Tasks”. In: (2020). Ed. by H. Larochelle, M. Ranzato, R. Hadsell, M. Balcan, and H. Lin.
- [17] C. Zhang, M. Jin, Q. Yu, H. Xue, and X. Jin. “Metric Learning for Projections Bias of Generalized Zero-shot Learning”. In: *CoRR* abs/2309.01390 (2023). arXiv: 2309.01390.
- [18] C. Packer et al. “MemGPT: Towards LLMs as Operating Systems”. In: *CoRR* abs/2310.08560 (2024). arXiv: 2310.08560.
- [19] M. Gemici et al. “Generative Temporal Models with Memory”. In: *arXiv [1702.04649]* (2017). arXiv: 1702.04649.
- [20] C. R. Gallistel and A. P. King. *Memory and the Computational Brain: Why Cognitive Science Will Transform Neuroscience*. Wiley-Blackwell, 2011.
- [21] D. Ma and X. Jiao. “Hyperdimensional Computing vs. Neural Networks: Comparing Architecture and Learning Process”. In: *CoRR* abs/2207.12932 (2022). arXiv: 2207.12932.

- [22] T. Munkhdalai, M. Faruqui, and S. Gopal. “Leave No Context Behind: Efficient Infinite Context Transformers with Infini-attention”. In: *CoRR* abs/2404.07143 (2024). arXiv: 2404.07143.
- [23] T. Dao and A. Gu. “Transformers are SSMS: Generalized Models and Efficient Algorithms Through Structured State Space Duality”. In: *CoRR* abs/2405.21060 (2024). arXiv: 2405.21060.
- [24] M. Beck et al. “xLSTM: Extended Long Short-Term Memory”. In: *CoRR* abs/2405.04517 (2024). arXiv: 2405.04517.
- [25] B. Millidge, T. Salvatori, Y. Song, R. Bogacz, and T. Lukasiewicz. “Predictive Coding: Towards a Future of Deep Learning beyond Backpropagation?”. In: *Proceedings of the Thirty-First International Joint Conference on Artificial Intelligence. IJCAI-2022*. International Joint Conferences on Artificial Intelligence Organization, July 2022, pp. 5538–5545.
- [26] Y. Sun et al. “Learning to (Learn at Test Time): RNNs with Expressive Hidden States”. In: *CoRR* abs/2407.04620 (2024). arXiv: 2407.04620.
- [27] B. Scholkopf et al. “Toward Causal Representation Learning”. In: *Proceedings of the IEEE* 109.5 (May 2021), pp. 612–634.
- [28] K. Drozdov, R. Shwartz-Ziv, and Y. LeCun. “Video Representation Learning with Joint-Embedding Predictive Architectures”. In: *CoRR* abs/2412.10925 (2024). arXiv: 2412.10925.
- [29] G. Zhou, H. Pan, Y. LeCun, and L. Pinto. “DINO-WM: World Models on Pre-trained Visual Features enable Zero-shot Planning”. In: *CoRR* abs/2411.04983 (2024). arXiv: 2411.04983.
- [30] A. Hu et al. “GAIA-1: A Generative World Model for Autonomous Driving”. In: *CoRR* abs/2309.17080 (2023). arXiv: 2309.17080.
- [31] F. Deng, J. Park, and S. Ahn. “Facing off World Model Backbones: RNNs, Transformers, and S4”. In: *CoRR* abs/2307.02064 (2023). arXiv: 2307.02064.
- [32] Z. Hu, Z. Zhang, G. E. Karniadakis, and K. Kawaguchi. “Score-Based Physics-Informed Neural Networks for High-Dimensional Fokker-Planck Equations”. In: *CoRR* abs/2402.07465 (2024). arXiv: 2402.07465.
- [33] F. Chollet. “On the Measure of Intelligence”. In: *CoRR* abs/1911.01547 (2019). arXiv: 1911.01547.
- [34] T. Hafting, M. Fyhn, S. Molden, M.-B. Moser, and E. I. Moser. “Microstructure of a spatial map in the entorhinal cortex”. In: *Nature* 436.7052 (June 2005), pp. 801–806.
- [35] J. C. Whittington et al. “The Tolman-Eichenbaum Machine: Unifying Space and Relational Memory through Generalization in the Hippocampal Formation”. In: *Cell* 183.5 (Nov. 2020), 1249–1263.e23.
- [36] V. Schøyen et al. “Coherently Remapping Toroidal Cells but Not Grid Cells Are Responsible for Path Integration in Virtual Agents”. In: *iScience* (2022).
- [37] M. B. Pettersen, V. Schøyen, A. Malthe-Sørensen, and M. E. Lepperød. “Learning place cells and remapping by decoding the cognitive map”. In: *eLife* 13 (July 2025).
- [38] M. Lepperød, M. Pettersen, and F. Rogge. “Learning Place Cell Representations and Context-Dependent Remapping”. In: *Advances in Neural Information Processing Systems 37*. NeurIPS 2024. Neural Information Processing Systems Foundation, Inc. (NeurIPS), 2024, pp. 244–269.
- [39] V. S. Schøyen et al. “Hexagons all the way down: grid cells as a conformal isometric map of space”. In: *PLOS Computational Biology* 21.2 (Feb. 2025). Ed. by C. Savin, e1012804.
- [40] C. V. Nguyen, Y. Li, T. D. Bui, and R. E. Turner. “Variational Continual Learning”. In: *CoRR* abs/1710.10628 (2017). arXiv: 1710.10628.
- [41] M. Wasiluk et al. *SELF-SUPERVISED PSEUDODATA FILTERING FOR IMPROVED REPLAY WITH SUB-OPTIMAL GENERATORS*. <https://openreview.net/pdf?id=2LhCPowI6i>. 2023. arXiv: 2309.01895.
- [42] A. Singh and Y. Diao. “Leveraging Large Language Models For Optimized Item Categorization using UNSPSC Taxonomy”. In: *CoRR* abs/2503.04728 (2025). arXiv: 2503.04728.
- [43] M. Pettersen, N. Haug, J. Bergli, T. M. Surowiec, and M. E. Lepperød. “Exponential Map Models as an Interpretable Framework for Generating Neural Spatial Representations”. In: (Sept. 2025). eprint: <https://www.biorxiv.org/content/early/2025/09/25/2025.09.25.678504.full.pdf>.
- [44] M.-K. Kvalsund, K. O. Ellefsen, K. Glette, S. Pontes-Filho, and M. E. Lepperød. “Sensor movement drives emergent attention and scalability in active neural cellular automata”. In: *Neural Networks* 200 (Aug. 2026), p. 108798.
- [45] E. Guichard, F. Reimers, M. Kvalsund, M. Lepperød, and S. Nichele. “EngramNCA: a Neural Cellular Automaton Model of Memory Transfer”. In: *ALIFE 2025: Ciphers of Life: Proceedings of the Artificial Life Conference 2025*. Vol. 37. isal2025. MIT Press, Oct. 2025.
- [46] E. Guichard, F. Reimers, M. Kvalsund, M. Lepperød, and S. Nichele. “ARC-NCA: Towards Developmental Solutions to the Abstraction and Reasoning Corpus”. In: *ALIFE 2025: Ciphers of Life: Proceedings of the Artificial Life Conference 2025*. Vol. 37. isal2025. MIT Press, Oct. 2025.

2 Curriculum Vitae and Track Record

Personal details

Name: Dr. Mikkel Elle Lepperød
Date of birth: 14 September 1985
Nationality: Norwegian
ORCID: 0000-0002-4262-5549
URL: <https://www.simula.no/people/mikkel>

Education and key qualifications

2020 **Ph.D.** Neuroscience, Faculty of Medicine, University of Oslo, Norway
2014 **M.Sc.** Applied Mathematics, Norwegian University of Life Sciences, Norway

Current and relevant previous positions

2026– **Senior Research Scientist** (equiv. associate professor), Simula Research Laboratory
2023– **Adjunct Associate Professor** (20%), Dept. of Physics, University of Oslo
2022–2026 **Research Scientist** (equiv. assistant professor), Simula Research Laboratory
2020–2022 **Postdoctoral Fellow**, Dept. of Biosciences, University of Oslo

PhD supervisor: Prof. Torkel Hafting and Prof. Marianne Fyhn (University of Oslo).

Postdoctoral mentor: Self-directed (group leader from 2020).

Career breaks: Parental leave (5 months in 2017, 5 months in 2020).

Research outputs

The following ten outputs demonstrate my trajectory from experimental neuroscience to neuro-inspired AI, establishing the foundations for FIND:

1. **Lepperød ME** et al. *Optogenetic pacing of medial septum parvalbumin-positive cells disrupts temporal but not spatial firing in grid cells*. Science Advances, 2021. *Role: First author, conceived and led the study. Significance: Established causal evidence for temporal coding in the entorhinal cortex, directly motivating the temporal predictive coding component of PAM.*
2. **Lepperød ME** et al. *Inferring causal connectivity from pairwise recordings and optogenetics*. PLoS Computational Biology, 2022. (With K. Kording.) *Role: First author. Significance: Developed quasi-experimental methods for causal inference in neural circuits, grounding FIND’s causal reasoning objectives.*
3. Schøyen VS*, Pettersen MB*, . . . , **Lepperød ME**. *Coherently remapping toroidal cells but not grid cells are responsible for path integration in virtual agents*. iScience, 2023. *Role: Senior/-corresponding author, supervised the project. Significance: Showed that AI agents spontaneously develop biologically consistent spatial cells, establishing our lab’s cognitive map expertise.*
4. Pettersen MB, Schøyen VS, Malthe-Sørenssen A, **Lepperød ME**. *Decoding the cognitive map: Learning place cells and remapping*. eLife, 2024. *Role: Senior/corresponding author. Significance: Demonstrated context-dependent memory through orthogonal remapping, key to FIND’s modular memory design.*
5. Pettersen MB, Rogge F, **Lepperød ME**. *Learning place cell representations and context-dependent remapping*. NeurIPS, 2024. *Role: Senior author. Significance: Extended cognitive map learning to context-switching, directly informing WP2’s compositional reasoning.*
6. Kvalsund MK, Ellefsen KO, Glette K, Pontes-Filho S, **Lepperød ME**. *Sensor movement drives emergent attention and scalability in active neural cellular automata*. Neural Networks, 2026. *Role: Senior/corresponding author. Significance: Demonstrated NCA-based inter-module communication with active vision—the primary orchestration mechanism for PAM.*
7. Guichard E, Reimers F, Kvalsund MK, **Lepperød M**, Nichele S. *EngramNCA: A neural cellular automaton model of memory transfer*. ALife, 2025. *Role: Co-supervisor. Significance: Showed NCA-based one-shot memory transfer between modules, directly enabling PAM’s distributed memory architecture.*

8. Guichard E, Reimers F, Kvalsund MK, **Lepperød M**, Nichele S. *ARC-NCA: Towards developmental solutions to the Abstraction and Reasoning Corpus*. ALife, 2025. Featured on Machine Learning Street Talk podcast. *Role: Co-supervisor. Significance: Demonstrated abstract reasoning through developmental self-organization, informing WP2’s compositional reasoning.*
9. Schøyen VS et al. *Hexagons all the way down: Grid cells as a conformal isometric map of space*. PLOS Computational Biology, 2025. *Role: Senior/corresponding author. Significance: Provided geometric theory of neural representations, informing HDC integration in PAM.*
10. Danielli K, **Lepperød ME**. *A bio-inspired minimal model for non-stationary K-armed bandits*. Biological Cybernetics, 2026. *Role: Senior/corresponding author. Significance: Demonstrated bio-inspired adaptive learning under non-stationarity, directly relevant to WP3’s open-ended adaptation.*

Significant peer recognition

- **NORA Award for Early Career Investigator** (2025)—National recognition for contributions to NeuroAI
- **Simula ERC Incubator** (2022)—Selected for institutional support program for ERC candidates
- **Wharton Executive Education** (2022)—“High-Potential Leaders: Accelerating Your Impact”
- **Invited speaker:** University of California San Diego (2022), AI Week Oslo Met (2023), Keynote at Young Researchers in NeuroAI (2023), Simula Bio-inspired Computing Seminar (2024)
- **Workshop organizer:** 4-day NeuroAI workshop on Hurtigruten with 20 international speakers (2024); co-organizer of 3+ NeuroAI workshops connecting national and international labs (2023–2024)
- **Reviewer:** Nature Machine Intelligence, PLoS Computational Biology, eNeuro
- **Board member:** NORA Special Interest Group for NeuroAI Norway
- **Public outreach:** Brain Inspired podcast (2024), Machine Learning Street Talk podcast (2025), NRK interview (2021), opinion pieces in digi.no and forskning.no

Project leadership and supervision

Group leader, BioAI group at Simula (2020–present): 4.5 MNOK/year, managing 3 PhD students, 1 postdoc. Built the group from inception to a productive research unit with publications at NeurIPS, eLife, Science Advances, and Nature Communications.

ML systems engineering: The PAM and PAMNCA codebases demonstrate large-scale ML engineering: systematic GPU cluster experiments (~15K GPU-hours on A40s), automated result parsing from 150+ log files, reproducible evaluation pipelines, and benchmarking across 5 real-world domains (CORE50, MIT-BIH, ESC-50, VoxCeleb, embodied navigation) using official online continual learning protocols. The postdoc will be recruited from the ML systems community (target: PhD from ICLR/ICML-publishing lab) to complement the PI’s neuroscience background.

Acting co-PI, Bio-inspired neural networks for AI application (2020–2026): 16 MNOK RCN-funded project, University of Oslo. Co-supervised 3 PhDs.

Supervised to completion: 2 PhD students (V. Schøyen, K. Holzhausen), 8+ MSc students (including graduates now at Stanford PhD program and UiO PhD program).

Additional information

Contributions to research infrastructure: Co-developed NEST simulator modules (Human Brain Project); co-developed Exdir data format and Expipes data management platform; lead role establishing NeuroAI as focus field in Norway–US Ministry of Education collaboration (2022). Developed NeuroAI course at University of Oslo (2023).