


src/main/java/com/hust
/ittnk68/cnpm/communication
/ServerDeleteObjectResponse.java

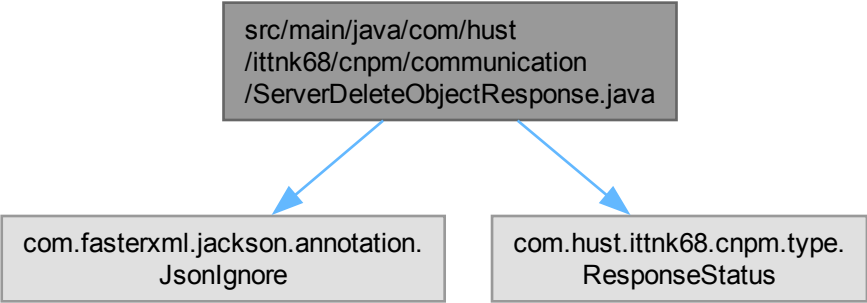

```
graph TD; A["src/main/java/com/hust<br/>/ittnk68/cnpm/communication<br/>/ServerDeleteObjectResponse.java"] --> B["com.fasterxml.jackson.annotation.<br/>JsonIgnore"]; A --> C["com.hust.ittnk68.cnpm.type.<br/>ResponseStatus"]
```

The diagram illustrates the package structure and imports for the file `ServerDeleteObjectResponse.java`. The top box represents the source file's location. Two blue arrows point from this box to two separate boxes below, indicating the packages from which classes are imported. The left box shows the `JsonIgnore` annotation from `com.fasterxml.jackson.annotation`. The right box shows the `ResponseStatus` class from `com.hust.ittnk68.cnpm.type`.

com.fasterxml.jackson.annotation.
JsonIgnore

com.hust.ittnk68.cnpm.type.
ResponseStatus