GENERATIVE PROJECT

Image Captioning with CLIP Encoder + GPT-2 Decoder
Milestone #2 Report

Group 8:	Name	Email
	Quoc Hung Le	le.quo@northeastern.edu
	Khoa Tran	tran.khoa@northeastern.edu
	Hassan Alfareed	alfareed.h@northeastern.edu

Github: https://github.com/lequo-neu/g8-generative-prj.git

Submission Date: Mar …, 2026

1. Introduction

This milestone integrates the CLIP image encoder with GPT-2 language decoder to build an end-to-end image captioning system. We implement prefix conditioning as the embedding injection method, where CLIP visual embeddings are projected into a sequence of learned prefix tokens prepended to GPT-2's input. The model is trained in two phases:

(1) frozen GPT-2 with only the ProjectionHead trained; and (2) partial fine-tuning of GPT-2's last 4 transformer layers. We evaluate three decoding strategies: greedy, beam search, and nucleus sampling.

2. Model Architecture

2.1 Prefix Conditioning

The ClipCaptionModel receives a 512-dimensional CLIP embedding and maps it through a ProjectionHead (Linear-GELU-Dropout-Linear-LayerNorm) to produce 10 prefix tokens of dimension 768. These prefix tokens are concatenated with GPT-2's word embeddings before the transformer layers. An extended attention mask ensures the prefix positions are always attended to. The loss is computed only on caption token positions, excluding prefix positions.

Insight: *Prefix conditioning is chosen over cross-attention because it requires no architectural modification to GPT-2 — the pretrained weights are used as-is. This simplifies implementation and makes the approach compatible with HuggingFace's generate() API for decoding.*

2.2 Model Parameters

Component	Parameters
ProjectionHead	62,945,280
GPT-2 (frozen)	124,439,808
Total	187,385,088
Trainable (Phase 1)	62,945,280 (33.6%)
Trainable (Phase 2, 4L unfrozen)	129,895,680 (69.3%)

Table 1: Model parameter breakdown.

3. Training

3.1 Phase 1: Frozen GPT-2

The ProjectionHead was trained for 7 epochs (early-stopped at epoch 4 + 3 patience) using AdamW optimizer with OneCycleLR scheduler (max LR 2e-4, 15% warmup, cosine annealing). Gradient clipping at norm 1.0 ensured stability. Batch size 16 on Apple M1 MPS backend.

Epoch	Train Loss	Val Loss	Status
1	3.9236	3.1079	best
2	3.2427	2.9791	best
3	3.0889	2.9360	best
4	2.9416	2.9193	best*
5	2.8114	2.9202	patience 1/3
6	2.6770	2.9450	patience 2/3
7	2.5453	2.9954	STOPPED

*Table 2: Phase 1 training log. *Best checkpoint saved at epoch 4.*

Insight: *Early stopping at epoch 7 (best at epoch 4) prevented the severe overfitting observed in our initial run without early stopping, where train loss reached 1.86 while val loss diverged to 3.50. The 0.4 gap between train and val at epoch 7 already indicates the model has memorized training captions.*

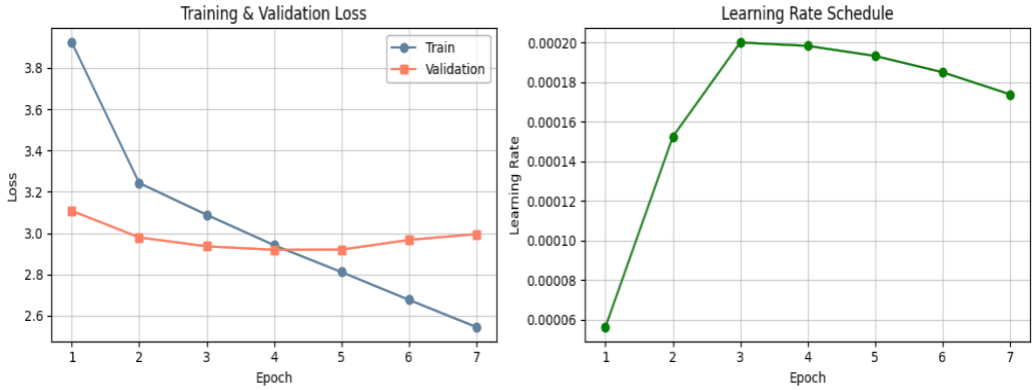

Figure 1: Training and validation loss curves with learning rate schedule.

3.2 Phase 2: Partial Fine-tuning (4 Layers)

Starting from the best frozen checkpoint (epoch 4, val loss 2.9193), we unfroze GPT-2 layers 8-11 plus the LM head. Training used AdamW at LR 5e-5 with early stopping patience 3. Fine-tuning early-stopped at epoch 4 (best at epoch 1).

FT Epoch	Train Loss	Val Loss	Status
1	2.7383	2.8899	best*
2	2.5728	2.8998	patience 1/3
3	2.3702	2.9689	patience 2/3
4	2.1731	3.0521	STOPPED

Table 3: Phase 2 fine-tuning log. Val loss improved from 2.9193 to 2.8899.

Insight: *Fine-tuning achieved its best val loss on epoch 1 and immediately began overfitting. The rapid train loss drop (2.74 to 2.17 in 4 epochs) with rising val loss (2.89 to 3.05) confirms that even 4 unfrozen layers overfit quickly on 2,400 samples. The improvement from 2.9193 to 2.8899 (1.0% relative) is modest, suggesting LoRA may be a better parameter-efficient alternative for M3.*

4. Decoding Strategy Comparison

We evaluated three decoding strategies on the frozen model across all 300 test images. All strategies used no_repeat_ngram_size=3 to suppress repetition loops. Greedy additionally used repetition_penalty=1.2.

Metric	Greedy	Beam	Nucleus	Best	Interpretation
BLEU-1	0.1366	0.1888	0.1485	Beam	Accuracy
BLEU-4	0.0085	0.0299	0.0131	Beam	Fluency
Distinct-1	0.1301	0.0975	0.1459	Nucleus	Diversity
Distinct-2	0.4303	0.2424	0.4191	Greedy	Diversity
Self-BLEU	0.4753	0.7460	0.4559	Nucleus	Low=diverse
Vocab	1,366	800	1,481	Nucleus	Richness
Avg Len	35.0	27.3	33.8	-	

Table 4: Decoding strategy metrics on frozen model (300 test images).

Insight: *Beam search dominates BLEU metrics (0.189 BLEU-1, 0.030 BLEU-4) by systematically exploring high-probability sequences. However, its high Self-BLEU (0.746) reveals that beam-decoded captions are homogeneous — many images get similar generic descriptions. Nucleus sampling trades BLEU accuracy for diversity (Vocab 1,481, Self-BLEU 0.456), producing more varied and creative captions. This accuracy-diversity tradeoff is a fundamental property of the decoding strategies, not a model limitation.*

5. Sample Caption Results

5.1 Frozen Model Samples

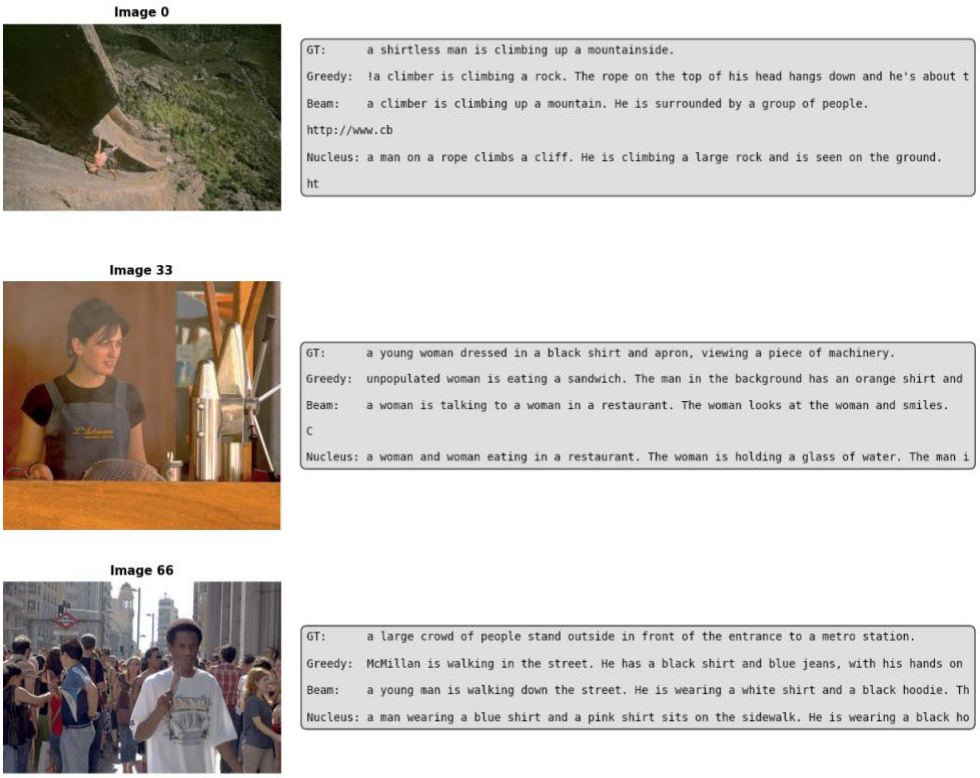

Figure 2: Three sample images with ground-truth and generated captions (frozen model).

Insight: *The model captures high-level scene content (climber, woman, crowd) but hallucinates details and generates web-text artifacts (URLs, copyright notices). This is expected: the ProjectionHead maps visual embeddings into GPT-2's input space, but GPT-2's pretrained weights still carry its web-crawl text distribution. The captions are grammatically correct but factually imprecise.*

5.2 Fine-tuned Model Samples

Figure 3: Three sample images with generated captions (fine-tuned model, 4 layers).

Insight: *Fine-tuned captions show marginal improvement in relevance (e.g., 'climber on a rock face' vs 'climbing a rock') but still exhibit web-text artifacts. The domain gap between GPT-2's pretraining corpus and image caption style remains the primary bottleneck.*

6. Frozen vs Fine-tuned Comparison

Metric	Frozen G	Frozen B	Frozen N	FT G	FT B	FT N
BLEU-1	0.1366	0.1888	0.1485	0.1408	0.1810	0.1555
BLEU-4	0.0085	0.0299	0.0131	0.0072	0.0264	0.0188
Dist-2	0.4303	0.2424	0.4191	0.4492	0.2569	0.4309
Self-B	0.4753	0.7460	0.4559	0.4600	0.7029	0.4301
Vocab	1366	800	1481	1445	875	1444

Table 5: Frozen vs Fine-tuned (4L) metrics. G=Greedy, B=Beam, N=Nucleus.

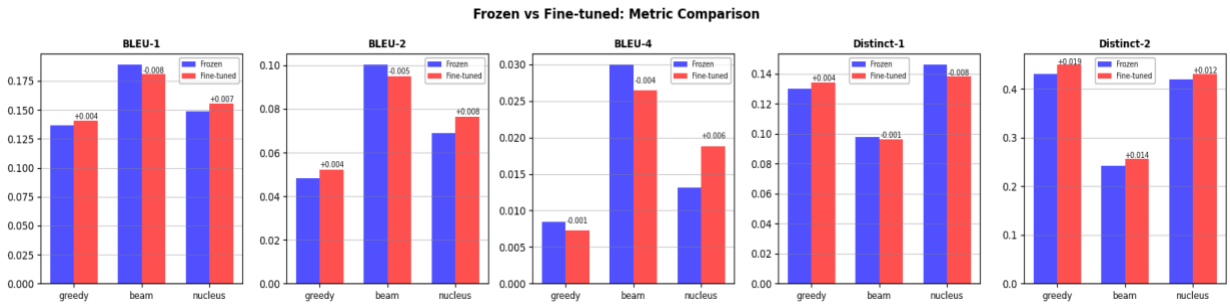

Figure 4: Grouped bar chart comparing frozen vs fine-tuned metrics.

Insight: *Fine-tuning shows mixed results: BLEU-1 improves for greedy (+0.004) and nucleus (+0.007) but regresses for beam (-0.008). Diversity metrics consistently improve — Distinct-2 increases across all strategies (greedy +0.019, beam +0.015, nucleus +0.012) and Self-BLEU decreases (lower = more diverse). The 4-layer fine-tuning primarily improves output diversity rather than accuracy, suggesting the model learns to deviate from GPT-2's generic web-text templates. For M3, LoRA fine-tuning may provide a better accuracy-diversity balance.*

7. Key Observations

Finding	Evidence
Early stopping critical	Val loss plateaued at epoch 4 (2.92), overfitting began at epoch 5. Without early stopping, diverged to val 3.50.
Beam = best BLEU	BLEU-1: 0.189, BLEU-4: 0.030 — highest across strategies by significant margin.
Nucleus = best diversity	Distinct-2: 0.419, Vocab: 1,481, Self-BLEU: 0.456 (lowest). Most creative outputs.
Domain gap persists	GPT-2 web-text prior causes URL hallucinations, copyright text, and non-caption artifacts.
FT: diversity > accuracy	4-layer FT improves Distinct-2 (+0.019 greedy) but mixed BLEU results (-0.008 beam BLEU-1).
FT overfits fast	Best FT val at epoch 1. Train loss drops 2.74->2.17 in 4 epochs while val rises 2.89->3.05.

Table 6: Key findings from Milestone #2.

8. Milestone #3 Preparation

Generated captions (frozen + fine-tuned, 300 test images x 3 strategies) are saved as JSON for formal evaluation. Both model checkpoints (best_model.pt, best_model_finetuned.pt) are available for ablation. Planned M3 work:

1. Compute METEOR, CIDEr, ROUGE-L using multi-reference ground truth (5 captions per image)
2. LoRA fine-tuning as parameter-efficient alternative to partial layer unfreezing
3. Prefix tuning comparison: learned prefix embeddings vs projected CLIP embeddings
4. Temperature sensitivity analysis (0.5, 0.7, 0.9, 1.0) for nucleus sampling
5. Beam width sensitivity (2, 3, 5, 8) for beam search

9. Team Member Roles

Member	Responsibilities
Quoc Hung Le	ClipCaptionModel architecture, training pipeline, decoding strategies, report writing
Hassan Alfareed	ProjectionHead design, fine-tuning experiments, evaluation metrics implementation
Khoa Tran	Dataset loading, caption generation pipeline, visualization, M3 metric preparation

Table 7: Team member role assignments.