



/CSCI 1101 WEB DEV

<CSS>





/TABLE OF CONTENTS



/01 /CSS RULES

- > Associating styles with HTML elements

/02 /CSS LOCATION

- > Internal vs external CSS

/03 /CSS SELECTORS

- > Identifying specific HTML elements

/04 /CSS RULES CASCADE

- > Which rules takes precedence?




/CSS

CSS creates rules that specify how the content of an element should appear. This will make web pages more attractive. In this section we will:

- Understand how CSS is applied to HTML pages
- Write CSS rules

**/IMAGINE THERE
IS AN INVISIBLE
BOX AROUND
EVERY HTML
ELEMENT**

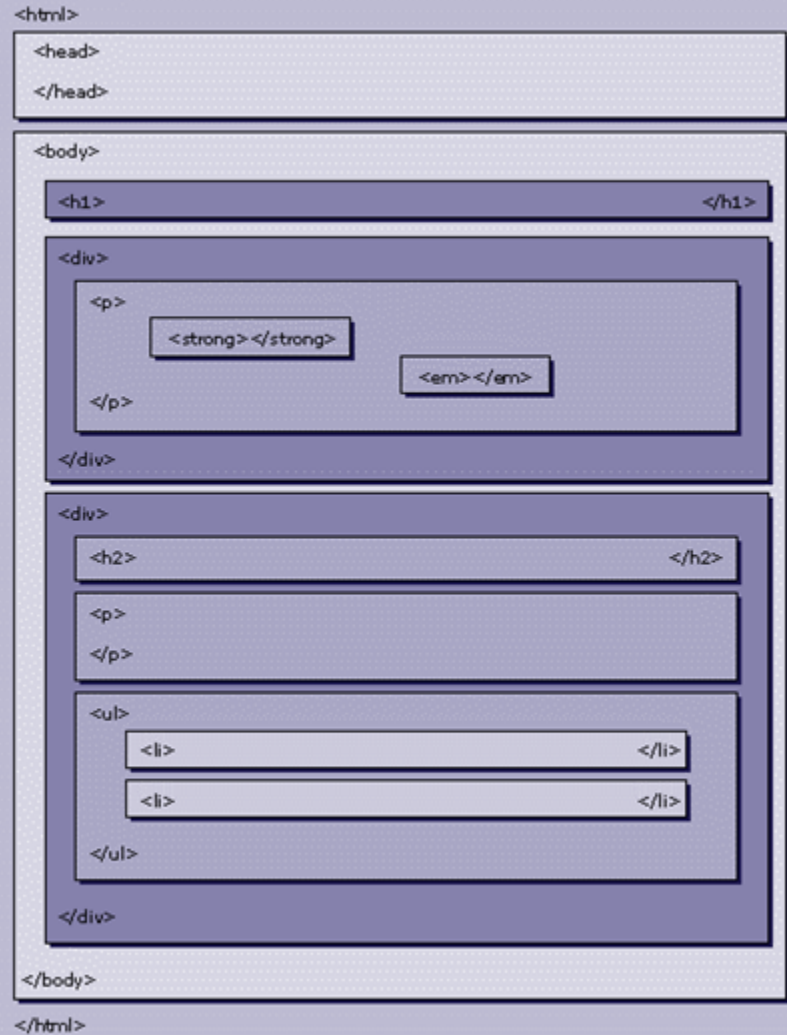

<CSS RULES>

Associating styles with
HTML elements



CSS RULES



SELECTOR

p {

font-family: Arial;

}

DECLARATION

h1, a {

font-family: Arial;

color: yellow;

}

PROPERTY

VALUE

<CSS LOCATION>

Internal or external CSS

/INTERNAL CSS



/INLINE

The `style` attribute change the appearance of HTML elements. For example:

```
<body>
  <p style="some style" >
    Sign up
  </p>
now!
</body>
```

NOT RECOMMENDED!

/HEAD

Often placed within the `<head>` tag. For example:

```
<head>
  <style type="text/css">
    <!-- CSS rules -->
  </style>
</head>
<body>
  <p> Sign up now! </p>
</body>
```




/EXTERNAL CSS



/LINK TAG

We will use the `<link>` tag inside the `<head>` tag to import CSS external files. For example:

```
<head>  
  <link href="css/styles.css" type="text/css" rel="stylesheet"/>  
</head>
```

INDICATES THE PATH
TO THE FILE

INDICATES THE **TYPE**
OF DOCUMENT BEING
LINKED TO

INDICATES THE **RELATIONSHIP**
BETWEEN THE HTML PAGE AND
THE CSS FILE

<CSS SELECTORS>

Identifying specific HTML elements



CSS SELECTOR TYPES



UNIVERSAL SELECTOR

```
* {  
    // css rules  
}
```

ELEMENT TYPE SELECTOR

```
p {  
    // css rules  
}
```

ID SELECTOR

```
#uniqueId {  
    // css rules  
}  
<div id="uniqueId"></div>
```

CLASS SELECTOR

```
.box {  
    // css rules  
}  
<span class="box"></span>
```

<CSS RULES CASCADE>

Which rule takes precedence?

/CASCADING RULES

If there are two or more rules that apply to the same element, it is important to understand which takes precedence.

/LAST RULE

If multiple selectors are identical, the latter will take precedence.

/SPECIFICITY

If one selectors is more specific than others, the more specific rule will take precedence.

h1 is more specific than *
p a is more specific than p

/IMPORTANT

If a property should take precedence over others, add the !important attribute.

```
p {  
    color: red  
    !important;  
}
```