DEVFEST MONTRÉAL 2026

# The Web could be agentic

## A first dive into Google's WebMCP Proposal.



**Lester Botello**

Development Team Lead, Wepoint
Chef d'equipe developpement, Wepoint

PLAYER 1 / JOUEUR 1

# About me

## À propos de moi



**Lester Botello**

Dev. Team Lead · WEPOINT

@lesterbotello

Software developer and team leader for more than 20 years.
Microsoft Certified: Azure AI Engineer Associate.

Développeur de logiciels et chef d'equipe depuis plus de 20 ans.
Microsoft Certified: Azure AI Engineer Associate.

| | |
|---|---|
| CLASS<br>CLASSE | **Web, mobile, backend, AI-driven developer**<br>Developpeur de logiciels sur Web, mobile et backend |
| HOME BASE<br>PORT D'ATTACHE | **Montréal, QC** |
| SPECIAL MOVE<br>COUP SPÉCIAL | **Web (React, Blazor), Mobile (Swift/Kotlin, .NET, Flutter)** |

# Agenda

## Au programme

| | | |
|---|---|---|
| 01 | **WebMCP explained**<br>Explication de WebMCP | 00 MIN |
| 02 | **Common use cases**<br>Cas d'usage courants | 00 MIN |
| 03 | **API breakdown**<br>Analyse détaillée de l'API | 00 MIN |
| 04 | **Limitations**<br>Limites | 00 MIN |
| 05 | **Demo**<br>Démo | 00 MIN |




STAGE / NIVEAU

01

# WebMCP Explained

## Explication de WebMCP

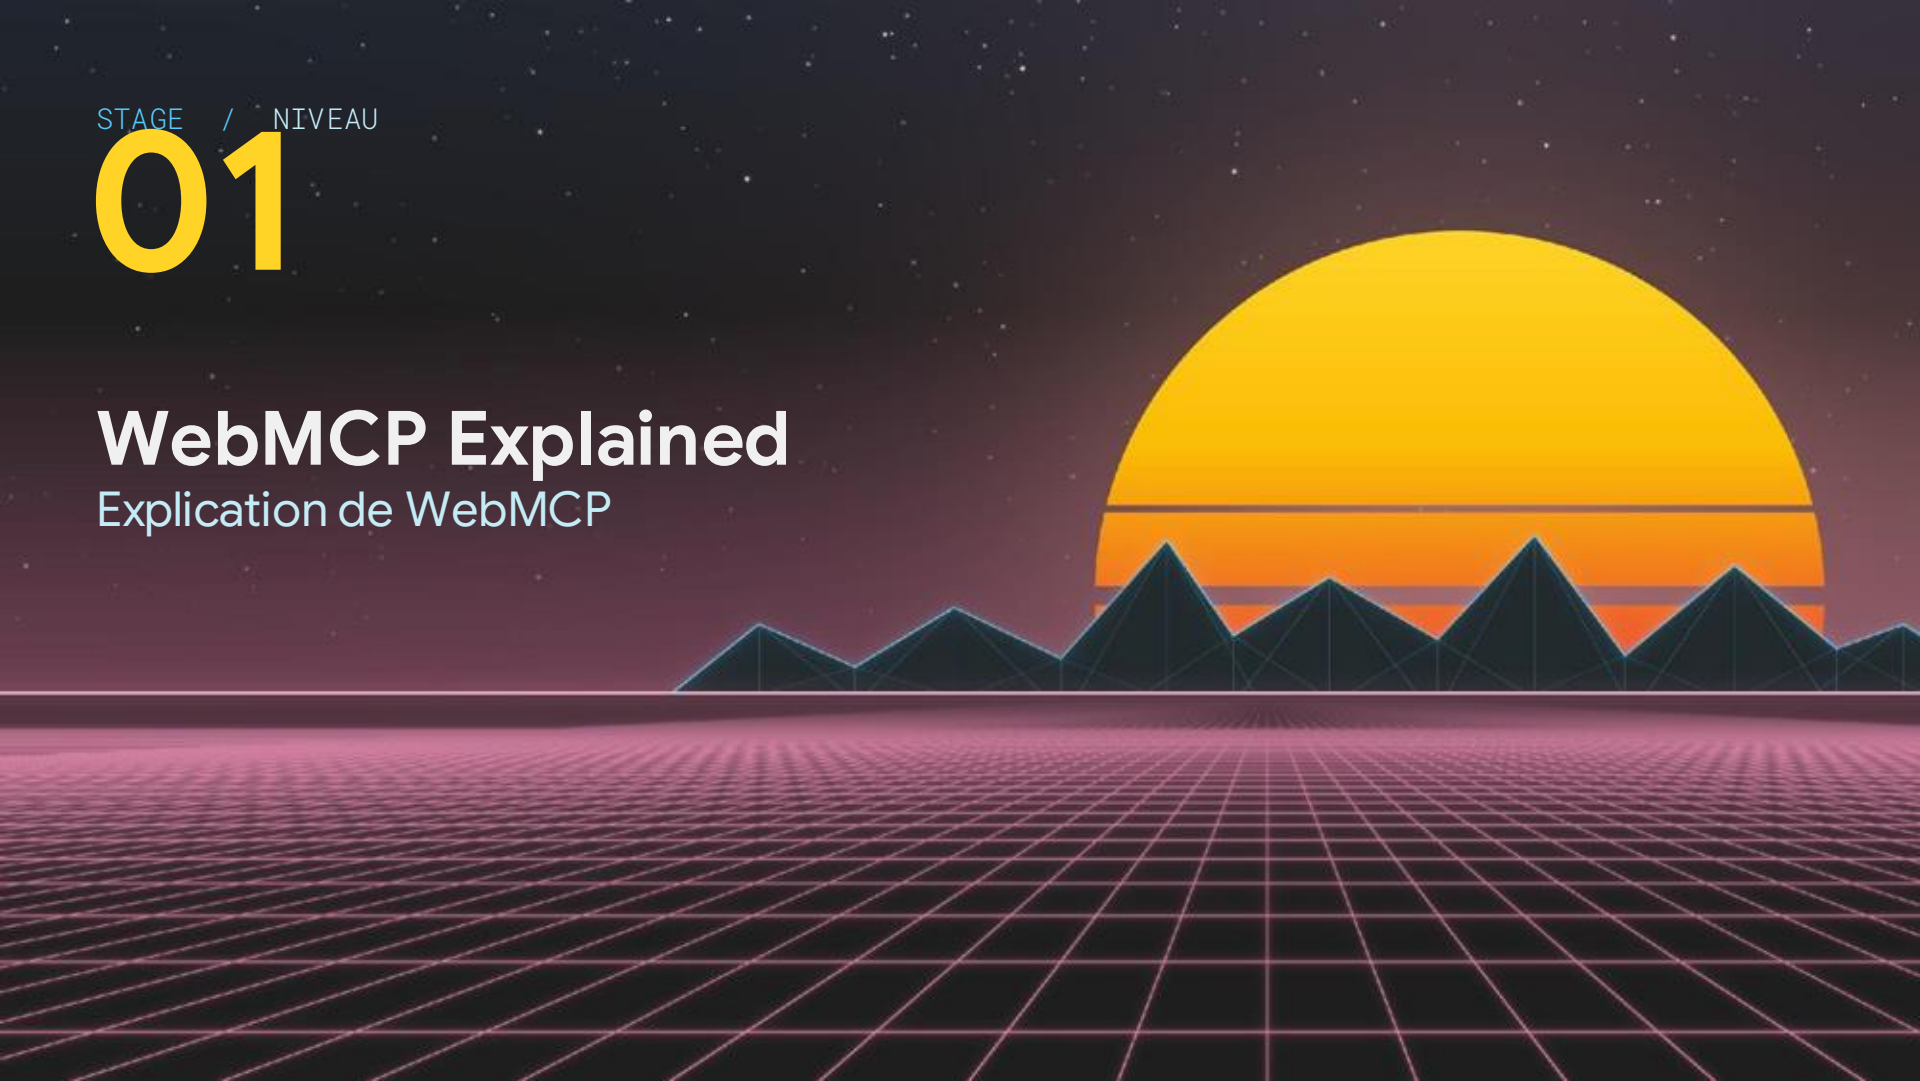

# 01 WebMCP

- Proposed standard aiming to add agentic tool capabilities to ANY website
- Compatible with any DOM or JavaScript capable website
- Should work side-by-side with DOM actuation, instead of replacing it
- Can leverage on-device models (Gemini Nano) for offline agentic work.
- Currently in early preview (requires latest Chrome Canary)



# 01 WebMCP vs MCP

PLAYER 1 / JOUEUR 1

## WebMCP

- Frontend JavaScript API for webpages to offer tools to agents
- Lives in a web page
- Can be called by any agent or client with access to the rendered page (browsers, webviews).
- Available only while the page is open

PLAYER 2 / JOUEUR 2

## MCP

- Protocol connecting agents to backend systems
- Lives on a server
- Can be called by any MCP client
- Available as long as the server is up

# 02 Common Use Cases

PLAYER 1 / JOUEUR 1

## What it’s good for

- Simplify web browser agentic communication
- Enable human-in-the-loop scenarios
- ”Agentize” an existing website.
- Improve accessibility through agents

PLAYER 2 / JOUEUR 2

## What it isn’t good for

- Fully autonomous workflows
- Replacement of backend integrations
- Replacement of human interfaces

STAGE / NIVEAU

# 03

# API Breakdown

## Analyse détaillée de l'API



# 03 Two APIs

PLAYER 1 / JOUEUR 1

## Declarative API

- Based on HTML form elements
- Annotated forms are recognized as tools by the WebMCP API
- Customization via tool parameters

PLAYER 2 / JOUEUR 2

## Imperative API

- Defines tools using JavaScript/TypeScript
- Preferred method of tool definition
- Allows for client-side complex logic

demo.html

> API BREAKDOWN // > ANALYSE DÉTAILLÉE DE L'API

# Declarative API

```
<form toolname="addTodo" tooldescription="Add a new item to the todo list" action="/submit">

  <label for="text">Category:</label>
  <input type=text name=text>

  <select name="select" required toolparamtitle="Category"
                                 toolparamdescription="The category of the TODO">
    <option value="Option 1">Work</option>
    <option value="Option 2">Reminders</option>
    <option value="Option 3">Entertainment</option>
  </select>

  <button type=submit>Submit</button>
</form>
```

demo.js

> API BREAKDOWN // > ANALYSE DÉTAILLÉE DE L'API

# Imperative API

```
await document.modelContext.registerTool({
  name: 'toggle_layer',
  description: 'Control pizza layers (sauce, cheese). Use "add", "remove", or "toggle".',
  inputSchema: {
    type: 'object',
    properties: {
      layer: { type: 'string', enum: ['sauce-layer', 'cheese-layer'] },
      action: { type: 'string', enum: ['add', 'remove', 'toggle'] },
    },
    required: ['layer'],
  },
  execute: async ({ layer, action }) => {
    await toggleLayer(layer, action);
    return `Performed ${action || 'toggle'} on layer: ${layer}`;
  },
});
```

STAGE / NIVEAU

# 04

# Limitations

Limites



# 04 Limitations

- Browsing context is required.
- Because of this, there’s no built-in discovery mechanism.
- Devs must ensure UI synchronization
- Complex UI may require refactoring in order to make sense of tools
- On-device models may not be smart enough for complex workflows.

STAGE / NIVEAU

# 05

## Demo

Démo



GG · BIEN JOUÉ / GG · GOOD GAME

# Merci!

## Thank you!

RESTONS EN CONTACT / LET'S CONNECT

| | |
|---|---|
| LINKEDIN | linkedin.com/in/lesterbotello |
| GITHUB | github.com/lesterbotello |
| TWITTER / BLUESKY | @lesterbotello |
| WEB | lesterbotello.dev |

SCAN ME

**Diapos et commentaires**
Slides & feedback