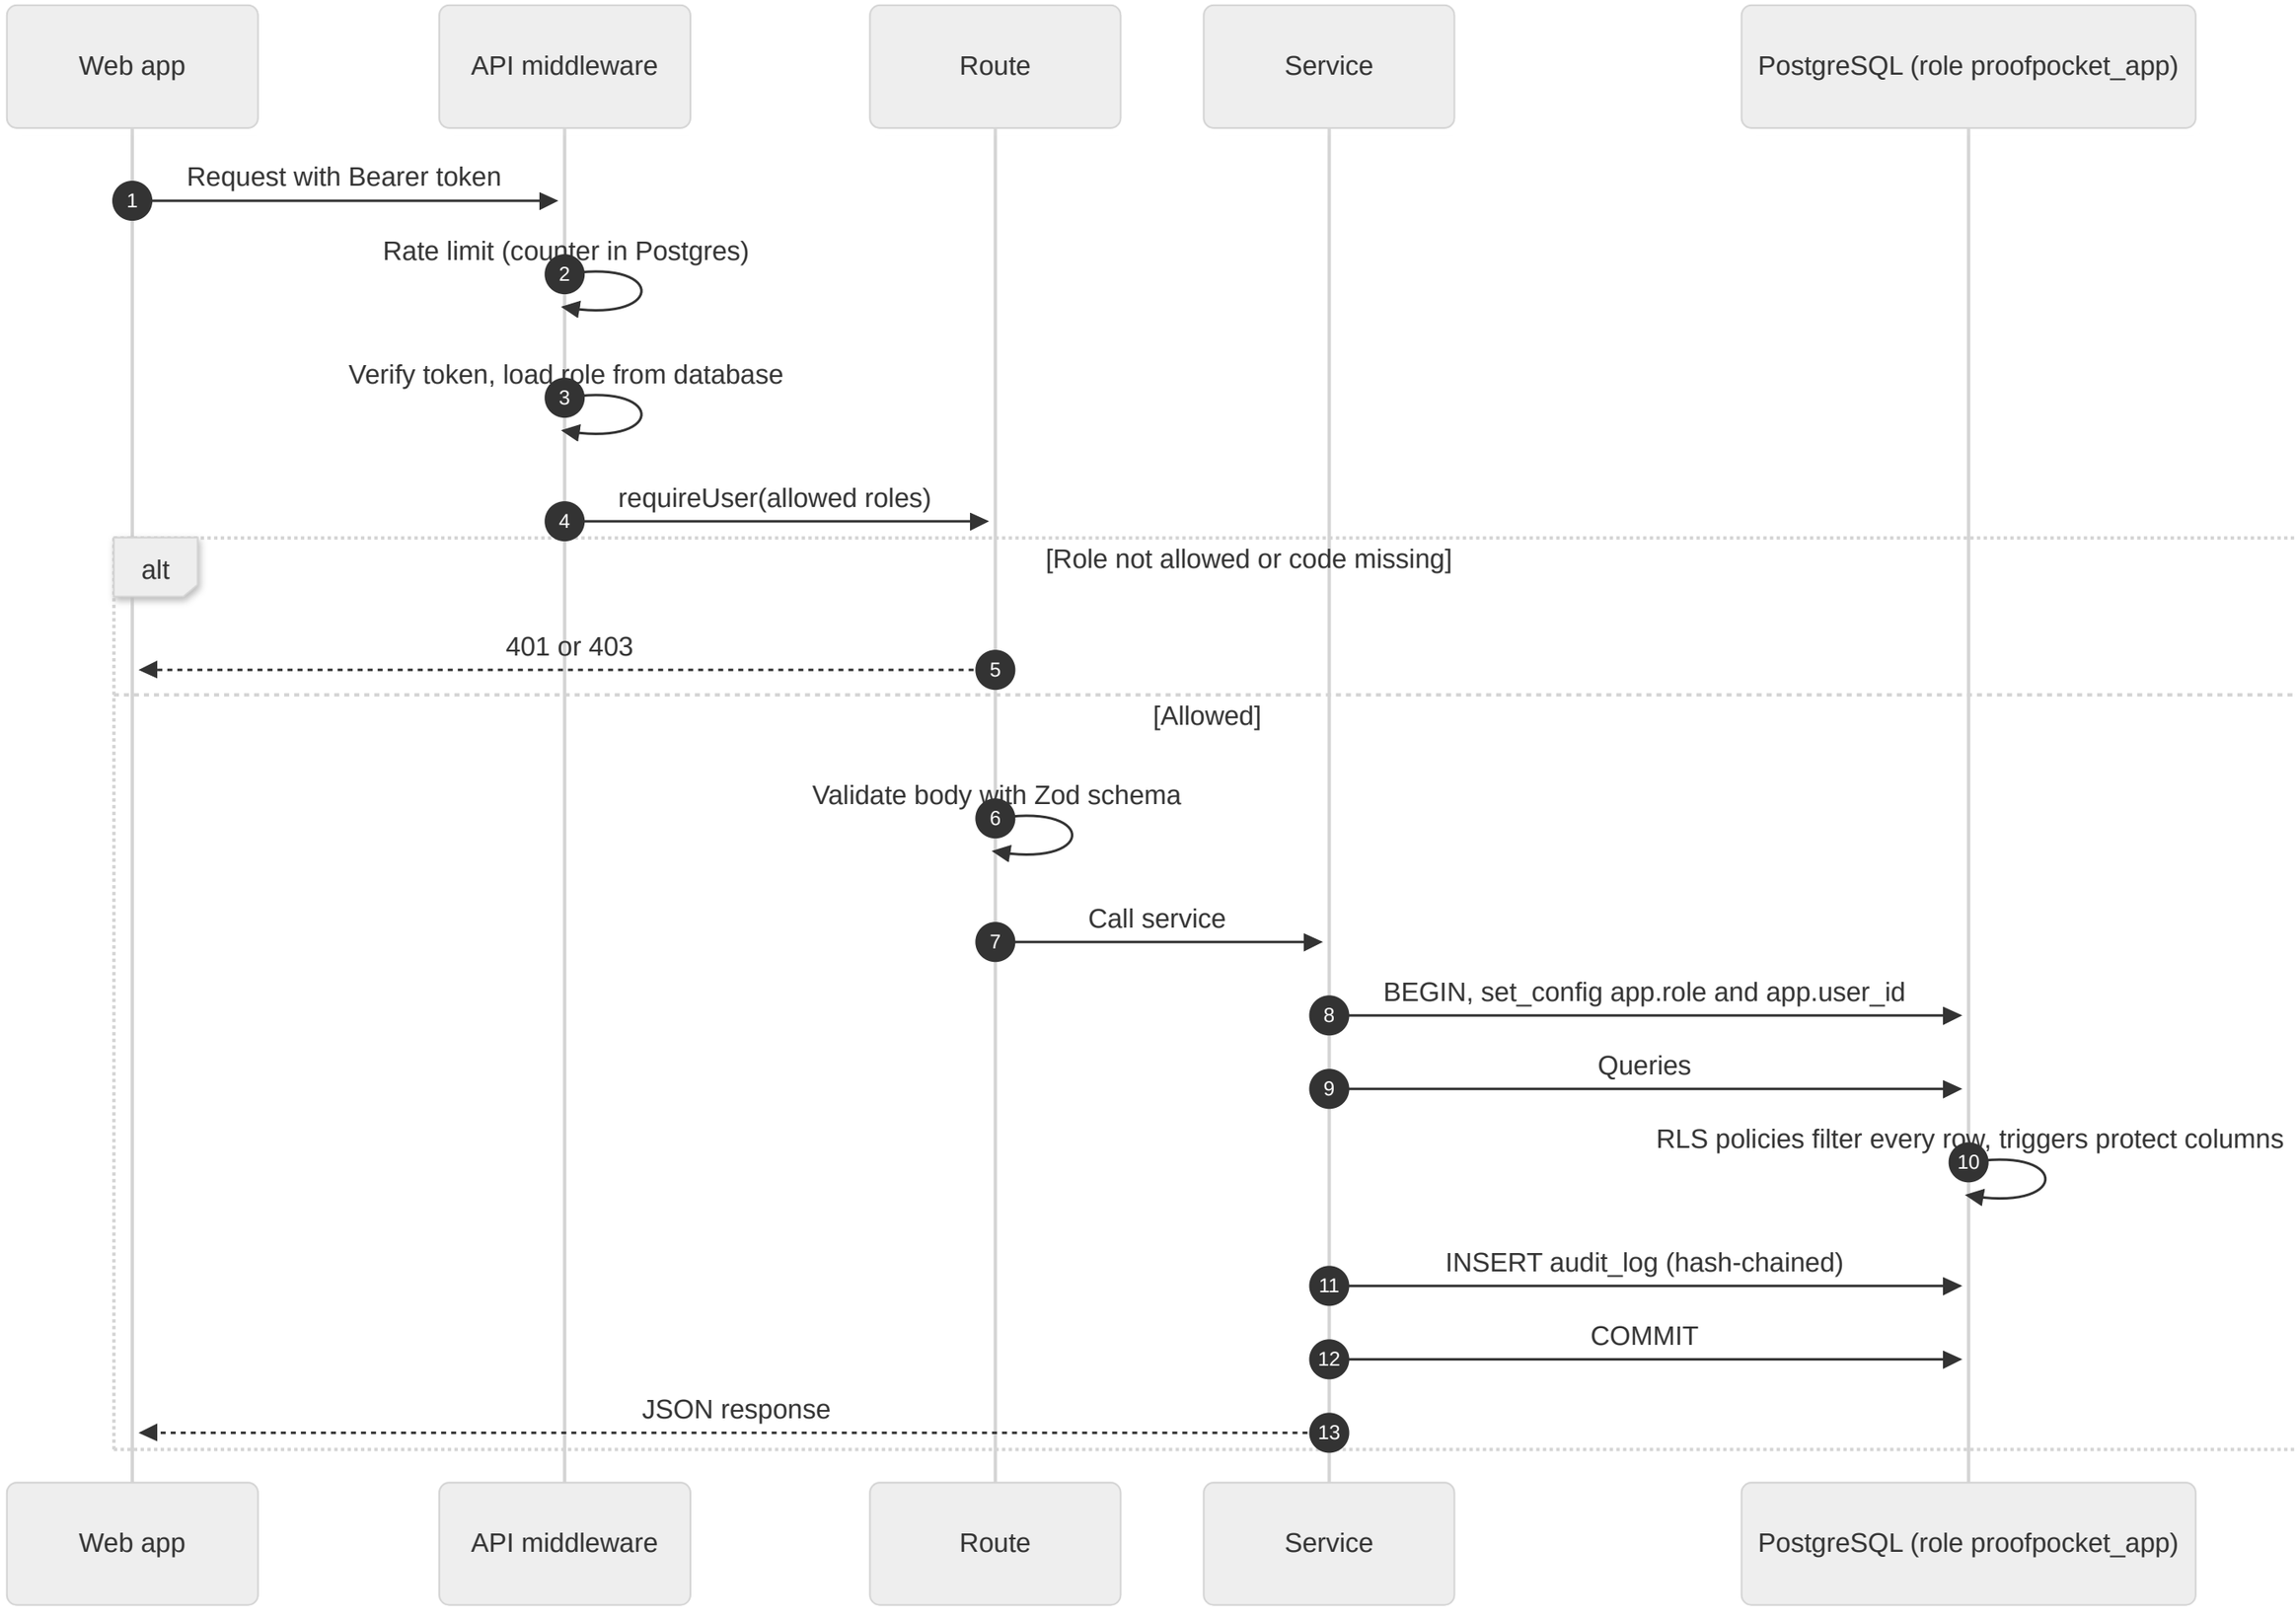

Web app
API middleware
Route
Service
PostgreSQL (role proofpocket_app)
1
Request with Bearer token
Rate limit (counter in Postgres)
2
Verify token, load role from database
3
requireUser(allowed roles)
4
alt
[Role not allowed or code missing]
401 or 403
5
[Allowed]
Validate body with Zod schema
6
Call service
7
BEGIN, set_config app.role and app.user_id
8
Queries
9
RLS policies filter every row, triggers protect columns
10
INSERT audit_log (hash-chained)
11
COMMIT
12
JSON response
13
Web app
API middleware
Route
Service
PostgreSQL (role proofpocket_app)