

Figure 1.11: Dashboard interface inventory screen

- 3.3. Navigate to the **OSDs** section to view information about the cluster OSDs. This section displays the number of OSDs, which host they reside on, the number and usage of placement groups, and the disk read and write speeds. Verify that `serverc` contains three OSDs. You can create, edit, and delete OSDs from this menu.

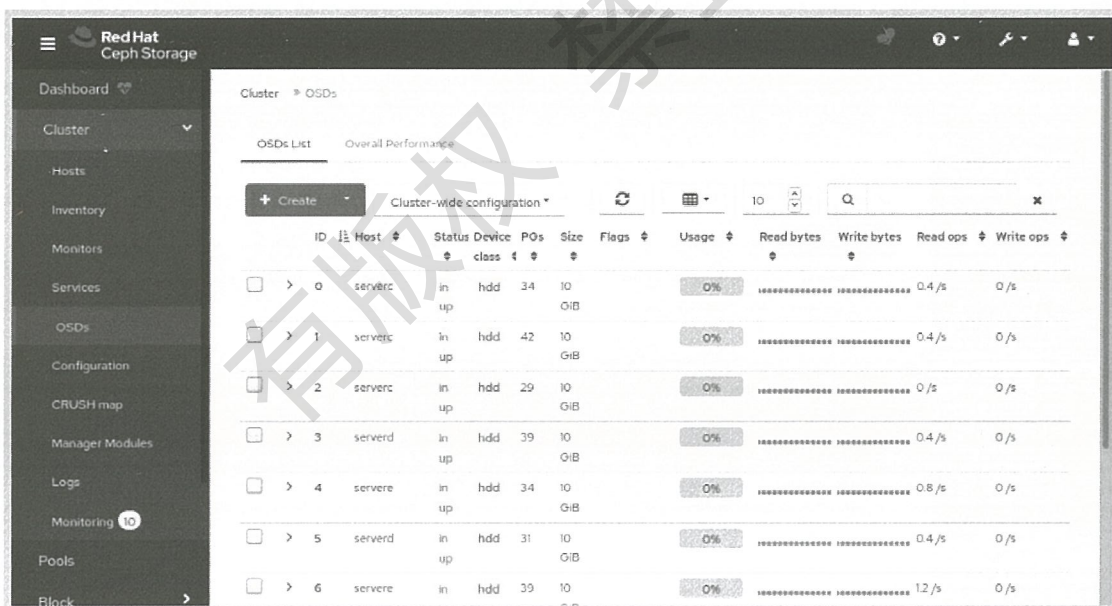


Figure 1.12: Dashboard interface OSDs screen

- 3.4. Navigate to the **CRUSH Map** section, which displays your cluster's CRUSH map. This map provides information about your cluster's physical hierarchy. Verify that the three host buckets `serverc`, `serverd`, and `servere` are defined within the default bucket of type `root`.